SERVICE MANUAL
PARTS LIST

MODEL AC-3500

AKAI

ALSO APPLICABLE TO MODEL AC-3500L

AKAI STEREO HIFI COMPACTS

MODEL AC-3500

SECTION 1 SERVICE MANUAL 3
SECTION 2 PARTS LIST 35
SECTION 3 SCHEMATIC DIAGRAM 52

SECTION 1

SERVICE MANUAL

TABLE OF CONTENTS

I. TECHNICAL DATA 4
II. DISMANTLING OF UNIT 5
III. CONTROLS 6
IV. PRINCIPAL PARTS LOCATION 8
V. DIFFERENTIAL PEAK DETECTOR OPERATION 10
1. CIRCUIT CONFIGURATION 10
2. OPERATION 10
VI. LEVEL DIAGRAM 11
VII. TUNER ADJUSTMENT 12
1. MODEL AC-3500 TUNER ADJUSTMENT 12
2. MODEL AC-3500L TUNER ADJUSTMENT 15
VIII. TUNING CORD THREADING 17
IX. CASSETTE RECORDER MECHANISM ADJUSTMENT 18
1. TAKE-UP TORQUE AT VARIOUS MODES AND TORQUE MEASURING METHOD 18
2. TAPE SPEED ADJUSTMENT 18
3. PINCH ROLLER PRESSURE MEASUREMENT 18
4. ADJUSTMENT OF GAP BETWEEN THE PINCH ROLLER ARM AND STOPPER 18
5. FLYWHEEL THRUST LOOSE PLAY ADJUSTMENT 19
6. HEAD ADJUSTMENT 19
X. CASSETTE RECORDER AMP ADJUSTMENT 20
XI. DC RESISTANCE OF VARIOUS COILS 22
XII. CLASSIFICATION OF VARIOUS P.C BOARDS 22
1. RELATION OF P.C BOARD TITLE AND IDENTIFICATION NUMBER 22
2. COMPOSITION OF VARIOUS P.C BOARDS 23

For basic adjustments, measuring methods, and operating principles, refer to GENERAL OPERATING PRINCIPLES AND ADJUSTMENTS.

I. TECHNICAL DATA

RECEIVER SECTION

(Amplifier)

POWER OUTPUT	25 watts per channel, min. RMS at 8 ohms from 40 to 20,000 Hz with no more than 0.5% T.H.D.
POWER BANDWIDTH (IHF)	10 Hz to 40 kHz/8 ohms (T.H.D: 0.5%)
SIGNAL TO NOISE RATIO (IHF)	PHONO: Better than 75 dB TAPE MONITOR: Better than 90 dB
CHANNEL SEPARATION (IHF)	PHONO: Better than 50 dB at 1 kHz
DAMPING FACTOR	More than 30 (1 kHz, 8 ohms)
OUTPUT SPEAKER HEADPHONES	A, B (4 to 16 ohms)/A+B (8 to 16 ohms) 4 to 16 ohms
INPUT SENSITIVITY/IMPEDANCE	PHONO: 3 mV/50 kohms TAPE MONITOR: PIN; 150 mV/100 kohms DIN; 150 mV/100 kohms
OUTPUT LEVEL/IMPEDANCE	TAPE REC: PIN; 150 mV/100 kohms DIN; 30 mV/180 kohms
FREQUENCY RESPONSE	PHONO (RIAA): 30 Hz to 15 kHz ±1 dB TAPE MONITOR: 10 Hz to 70 kHz +0/−2 dB
TONE CONTROL	BASS: ±10 dB at 100 Hz TREBLE: ±10 dB at 10 kHz

(Tuner)

FM

FREQUENCY RANGE	88 MHz to 108 MHz
SENSITIVITY (IHF)	1.9 μV
CAPTURE RATIO	1.5 dB
SELECTIVITY (IHF)	More than 50 dB
STEREO SEPARATION	More than 35 dB at 1 kHz
SIGNAL TO NOISE RATIO	65 dB
HARMONIC DISTORTION	MONO: Less than 0.3%, STEREO: Less than 0.7%
IMAGE REJECTION	More than 65 dB
IF REJECTION	More than 90 dB
SPURIOUS REJECTION	More than 90 dB
AM SUPPRESSION	45 dB
MUTING	Switchable to ON-OFF
ANTENNA INPUT IMPEDANCE	300 ohms balanced, 75 ohms unbalanced

MW

FREQUENCY RANGE	520 kHz to 1,605 kHz
SENSITIVITY (IHF)	180 μV/m (Bar antenna), 10 μV/m (Ext. antenna)

* LW

FREQUENCY RESPONSE	150 kHz to 350 kHz
SENSITIVITY (IHF)	200 μV/m (Bar antenna), 10 μV/m (Ext. antenna)

CASSETTE RECORDER SECTION

TRACK SYSTEM	4 track, 2 channel stereo system
WOW & FLUTTER	0.08% WRMS (NAB), 0.24% (DIN45507)
FREQUENCY RESPONSE	35 to 13 kHz ±3 dB using LN tape 35 to 14 kHz ±3 dB using SA tape
DISTORTION	Less than 1.5% using LN tape (1 kHz/0 VU)
SIGNAL TO NOISE RATIO	51 dB using LN tape (Measured via tape with peak recording level of +3 VU) Dolby N.R. Switch ON: Improves up to 10 dB above 5 kHz
ERASE RATIO	Better than 65 dB
BIAS FREQUENCY	75 kHz
HEADS	(2): One Recording/Playback head, One Erase head
MOTOR	(1): Electronically Speed Controled DC Motor
INPUT SENSITIVITY/IMPEDANCE	MICROPHONE (2): 0.3 mV/2 kohms REQUIRED MICROPHONE IMPEDANCE: 600 ohms

MISCELLENEOUS

SEMI CONDUCTORS	Transistors: 25, Diodes: 24, ICs: 8, FET: 1
POWER REQUIREMENTS	CSA models: 120V/60 Hz CEE models: 220V/50 Hz Other models: 110/220/240V, 50/60 Hz switchable
DIMENSIONS	500(W) x 157(H) x 400(D)mm (19.7(W) x 6.2(H) x 15.7(D) inches)
WEIGHT	11 kg (24.2 lbs)

Notes:
1. *Applicable to only Model AC-3500L.
2. For improvement purposes, specifications and design are subject to change without notice.
3. Noise reduction circuit made under license from Dolby Laboratories Inc. The word 'DOLBY' and the Double-D symbol are trademarks of Dolby Laboratories Inc.

II. DISMANTLING OF UNIT

In case of trouble, etc. necessitating disassembly, please disassemble in the order shown in photographs. Reassemble in reverse order.

1

SCREWS

2

SCREWS

3

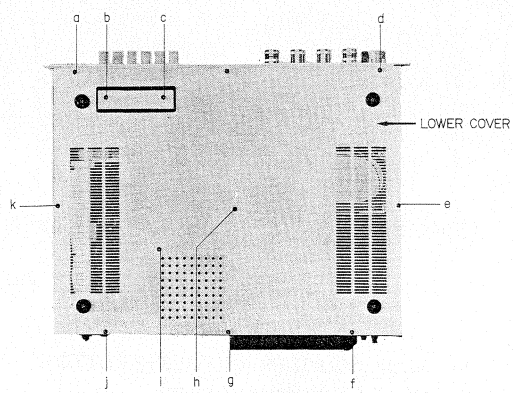

SCREWS

4

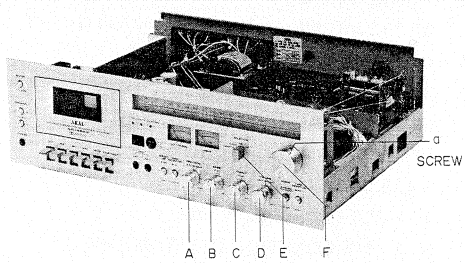

KNOBS

5

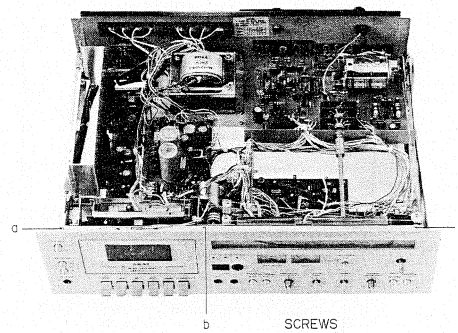

SCREWS

6

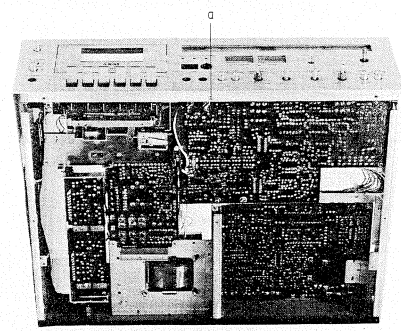

SCREW

7

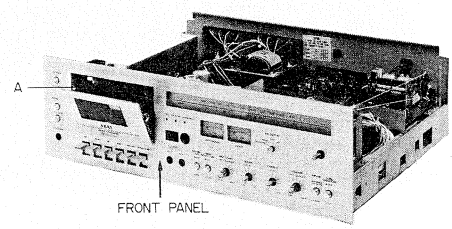

FRONT PANEL

※ IN CASE OF FRONT PANEL DISMANTLING
Press in on the inside part A of the cassette holder with your thumb until it clicks, then pull the upper part of the lid down to remove it.
And then remove the front panel.

8

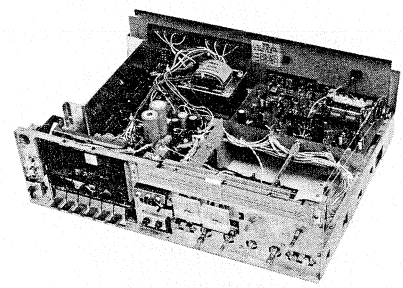

III. CONTROLS

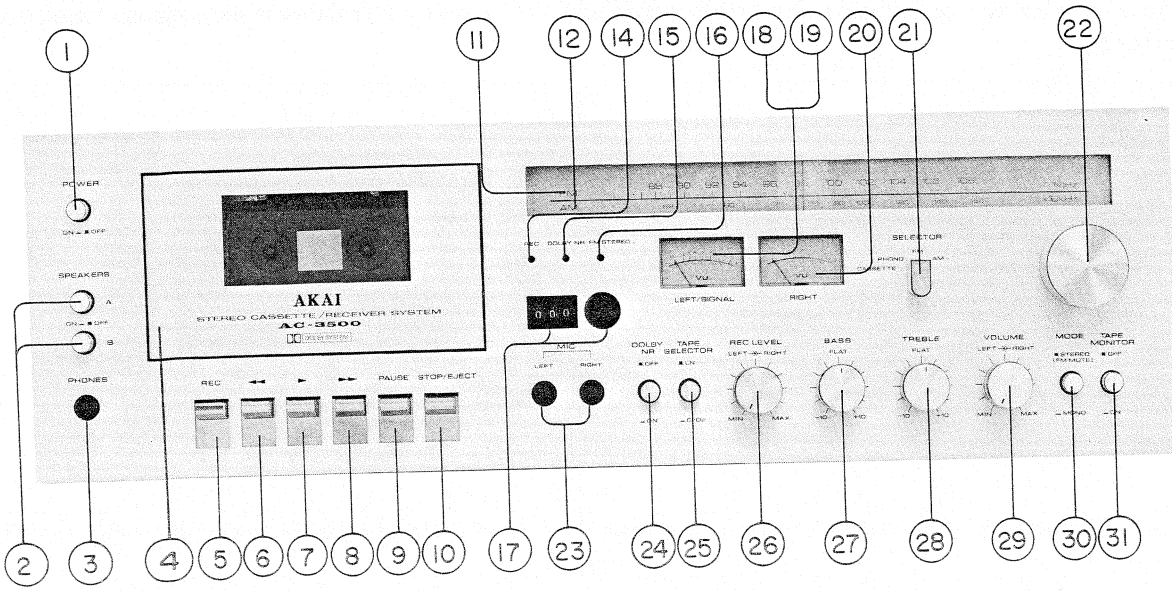

Fig. 1 AC–3500

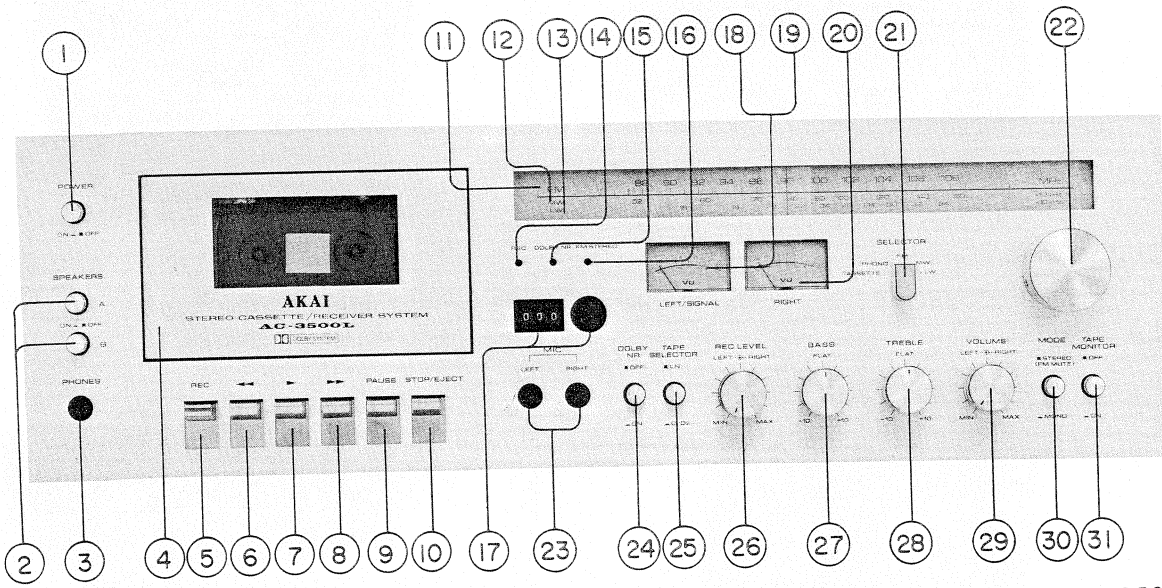

Fig. 2 AC–3500L

1. POWER SWITCH
2. SPEAKER SYSTEM SELECTOR
3. HEADPHONE JACK
4. CASSETTE RECEPTACLE (WITH TAPE VIEW WINDOW)
5. RECORDING (REC) KEY
6. REWIND KEY
7. PLAY KEY
8. FAST FORWARD KEY
9. PAUSE KEY
10. STOP/EJECT KEY
11. FM DIAL SCALE
12. AM DIAL SCALE (MEDIUM WAVE)
13. AM DIAL SCALE (LONG WAVE)
14. RECORDING INDICATOR LAMP
15. DOLBY N.R. INDICATOR LAMP
16. FM STEREO LAMP
17. INDEX COUNTER AND RESET BUTTON
18. FM/AM/LW TUNING METER
19. LEFT VU METER
20. RIGHT VU METER
21. SOURCE SELECTOR
22. TUNING KNOB
23. MICROPHONE JACKS (LEFT AND RIGHT)
24. DOLBY N.R. SWITCH
25. TAPE SELECTOR SWITCHES
26. RIGHT RECORDING CONTROL
    LEFT RECORDING CONTROL
27. BASS CONTROL KNOB
28. TREBLE CONTROL KNOB
29. VOLUME CONTROL (LEFT/RIGHT)
30. MODE SWITCH (FM MUTE SWITCH)
31. TAPE MONITOR SWITCH

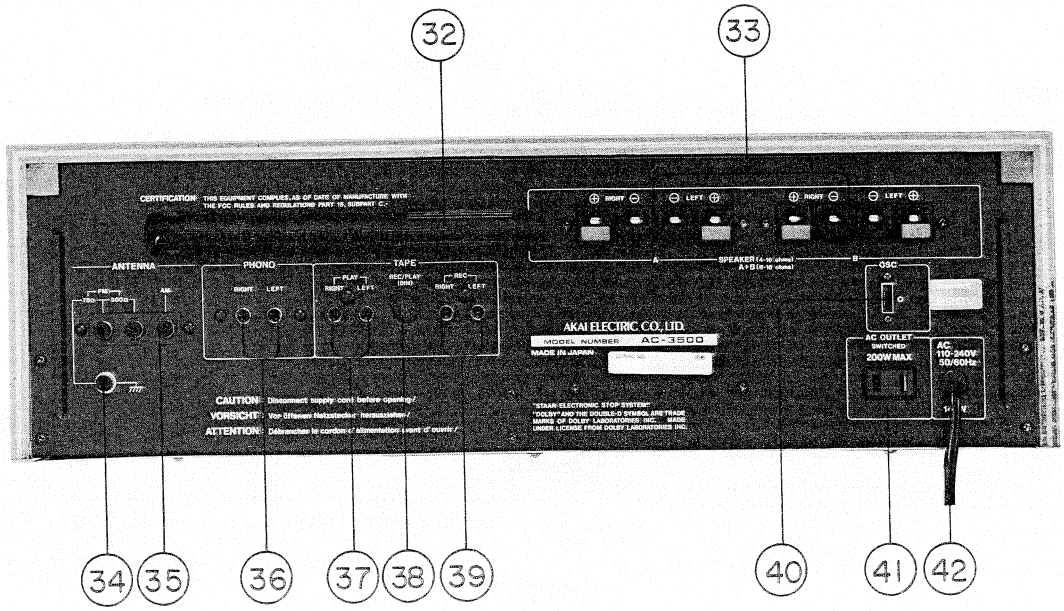

Fig. 3 AC–3500

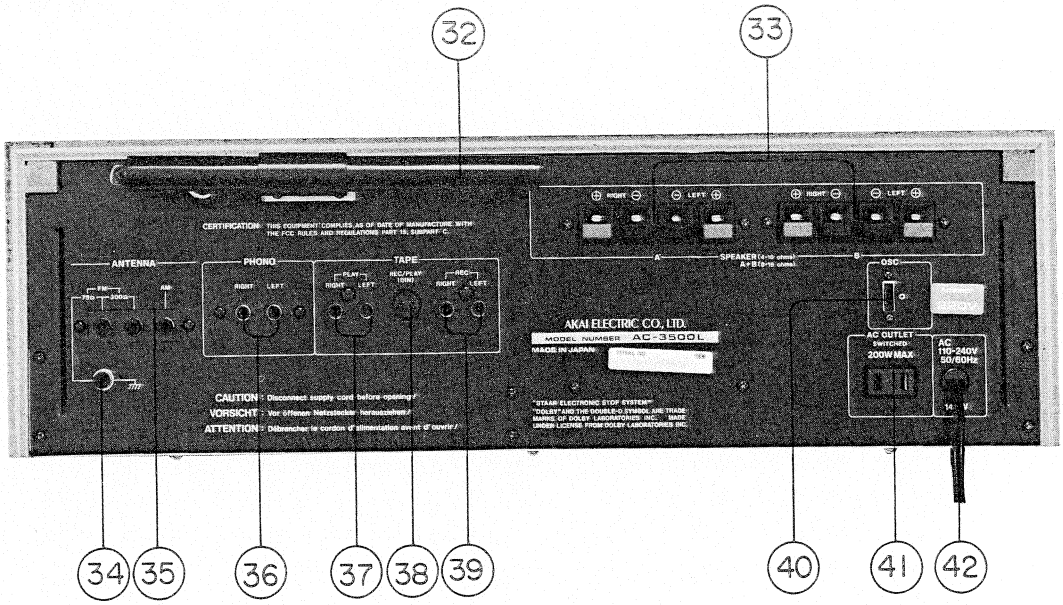

Fig. 4 AC–3500L

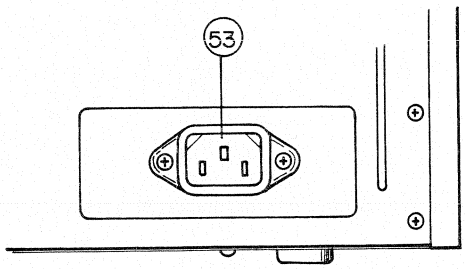

Fig. 5

32. AM FERRITE BAR ANTENNA
33. A AND B SYSTEM SPEAKER TERMINALS
34. AMPLIFIER AND PHONO GROUND TERMINAL
35. ANTENNA TERMINAL
36. PHONO JACK
37. TAPE PLAY JACK
38. TAPE SYSTEM DIN JACK
39. TAPE REC JACK
40. BEAT CUT-OFF SWITCH (OSC)
41. EXTRA AC OUTLET (CEE MODELS NOT EQUIPPED WITH THIS FACILITY)
42. AC CORD
43. AC INLET

IV. PRINCIPAL PARTS LOCATION

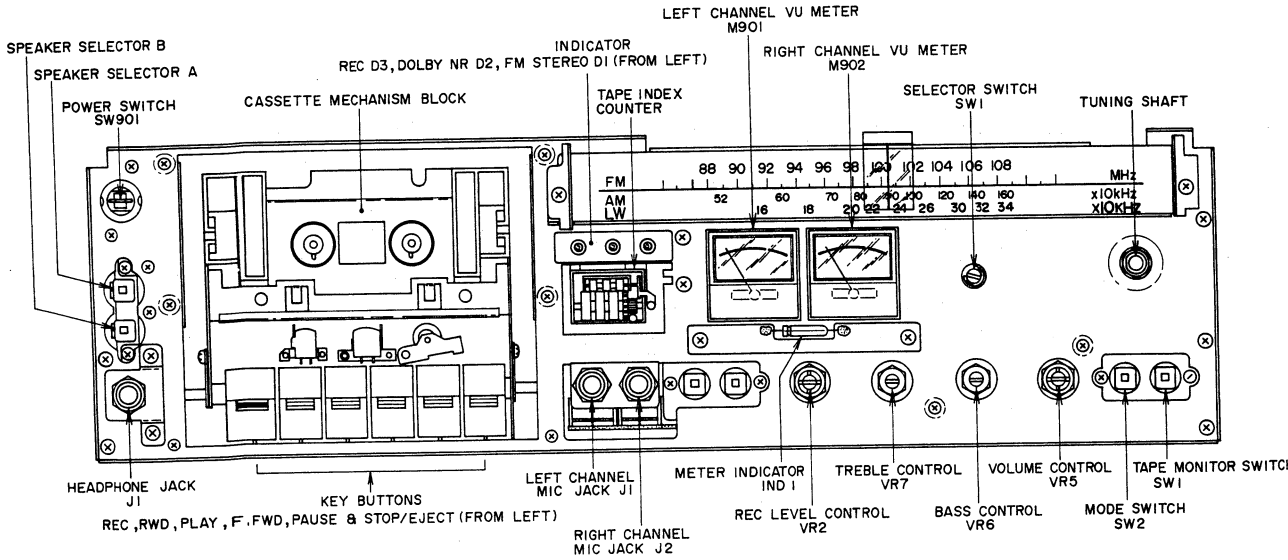

Fig. 6 Front View

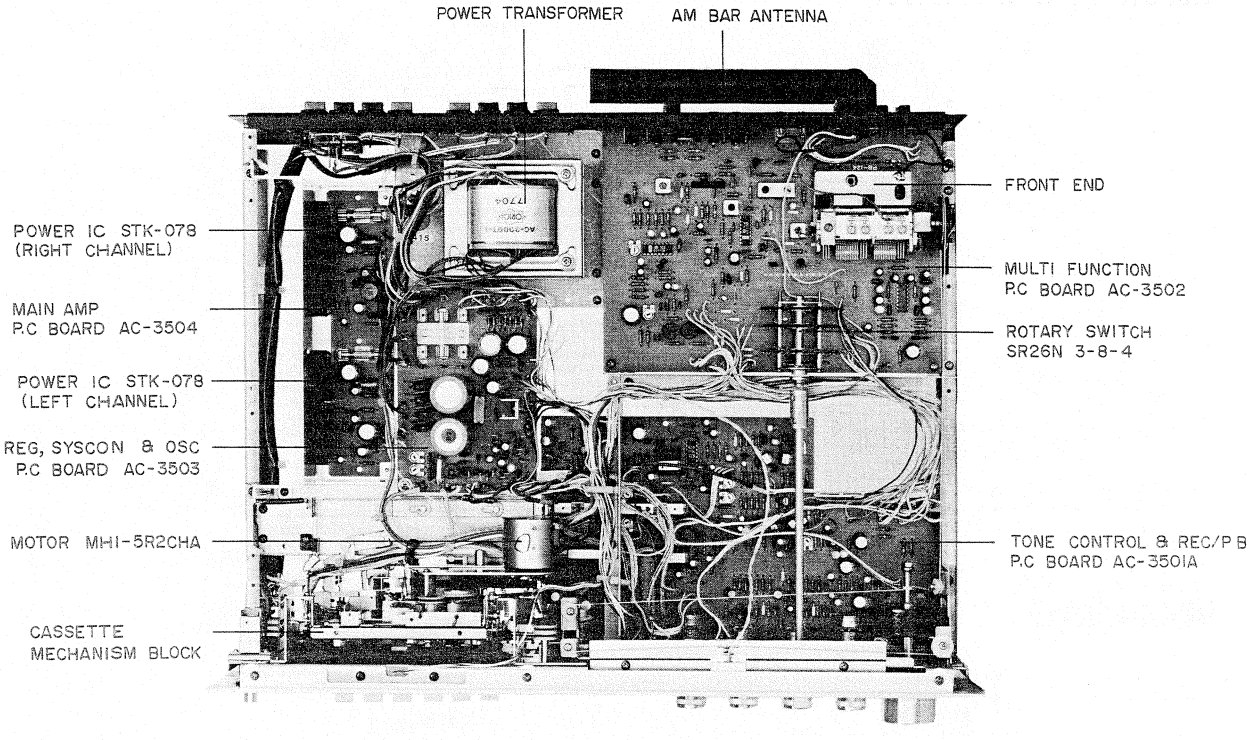

Fig. 7 AC–3500 Top View

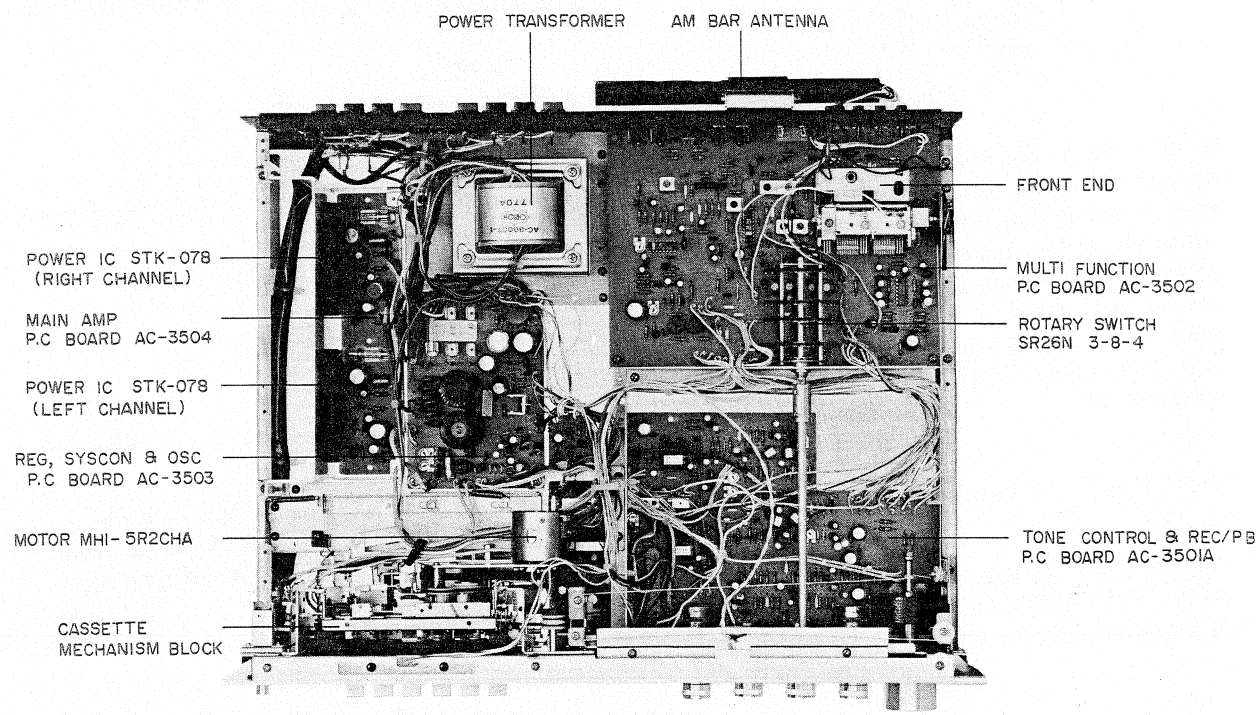

Fig. 8 AC–3500L Top View

V. DIFFERENTIAL PEAK DETECTOR OPERATION

1. CIRCUIT CONFIGURATION

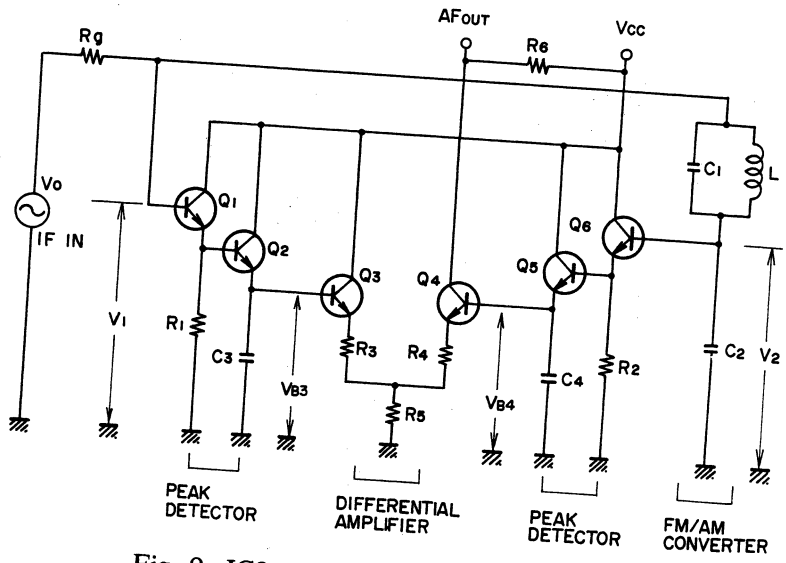

Fig. 9 IC2 (TA7303P) Detector Equivalent Circuit

2. OPERATION



Fig. 10

As shown in Fig. 9, FM Signals of IF output voltage are converted into AM signals due to the resonance frequency characteristics of series resonance in circuit L (constituting an LC circuit) and circuits C_1, C_2 and parallel resonance in circuits L and C_1.

As can be understood in Fig. 10, the circuit impedance is at minimum in the vicinity of series resonance frequency f_L. Thus, the following approximation is obtained:

$$Z_1 + Z_2 \fallingdotseq 0 \quad \cdots\cdots (1)$$

And, circuit current i can be expressed as follows:

$$i = Vo / Rg \quad \cdots\cdots (2)$$

When expressing the voltages across A and B, and across B and GND as V_3 and V_2 respectively, the following are obtained:

$$V_3 = V_1 - V_2 = Z_1 \cdot i \quad \cdots\cdots (3)$$

$$V_2 = Z_2 \cdot i \quad \cdots\cdots (4)$$

Provided that the voltage across A and GND equals V_1, and formula (5) is obtained from (1), (3) and (d).

$$V_1 = (Z_1 + Z_2)i \fallingdotseq 0 \quad \cdots\cdots (5)$$

Therefore, comparing formula (4) and (5), the following is obtained:

$$|V_2| \gg |V_1|$$

As is clear from formula (1), (3) and (4), voltage V_3 across A and B and voltage V_2 across B and GND are equal in amplitude, and out of phase. Accordingly, voltage V_1 across A and GND is cancelled approximately to zero.

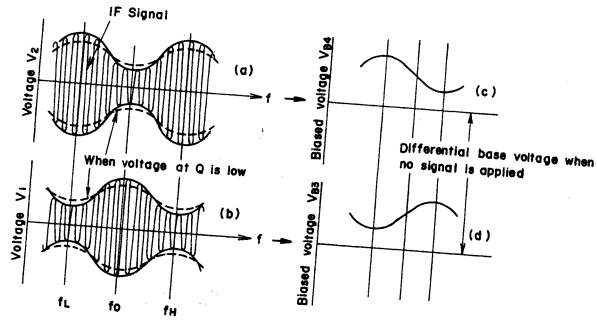

Fig. 11

The circuit is arranged so that voltage V_1 across A and GND and voltage V_2 across B and GND are equal in absolute value, and out of phase when IF frequency is 10.1 MHz (=fo).

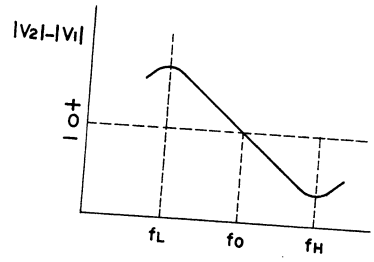

Fig. 12

Because the impedance across A and B is infinity with parallel resonance frequency f_H, voltage V_2 across B and GND is approximately zero V. Thus, the following is obtained.

$$|V_1| \gg |V_2|$$

As explained above, FM signals of IF output pass through the LC series/parallel circuits included in Fig. 9, where their waveforms become as shown in Fig. 11 (a) and (b), while the signals are converted into AM signals.

The AM signals converted are then fed the bases of transistors Q_2 and Q_5 through the emitter-followers of transistors Q_1 and Q_2 as indicated in Fig. 9.

Capacitors C_3 and C_4 in circuits Q_2 and Q_5 eliminate IF signals, and detect the peak signals thereby providing waveforms like those shown in Fig. 11 (c) and (d).

They are then fed to the bases of transistors Q_3 and Q_4 included in the differential amplifier circuit, which amplifies the signals. A band width is specified for the differential circuit and, when inputs such as shown in Fig. 11 (c) and (d) are applied to the bases of transistors Q_3 and Q_4, the amplifier output exhibits S-curve characteristics as shown in Fig. 12.

As the S-curve in Fig.12 becomes sharper, the output becomes saturated at a frequency nearer to fo, thus permitting the band width to be narrower and providing a larger detection output.

VI. LEVEL DIAGRAM

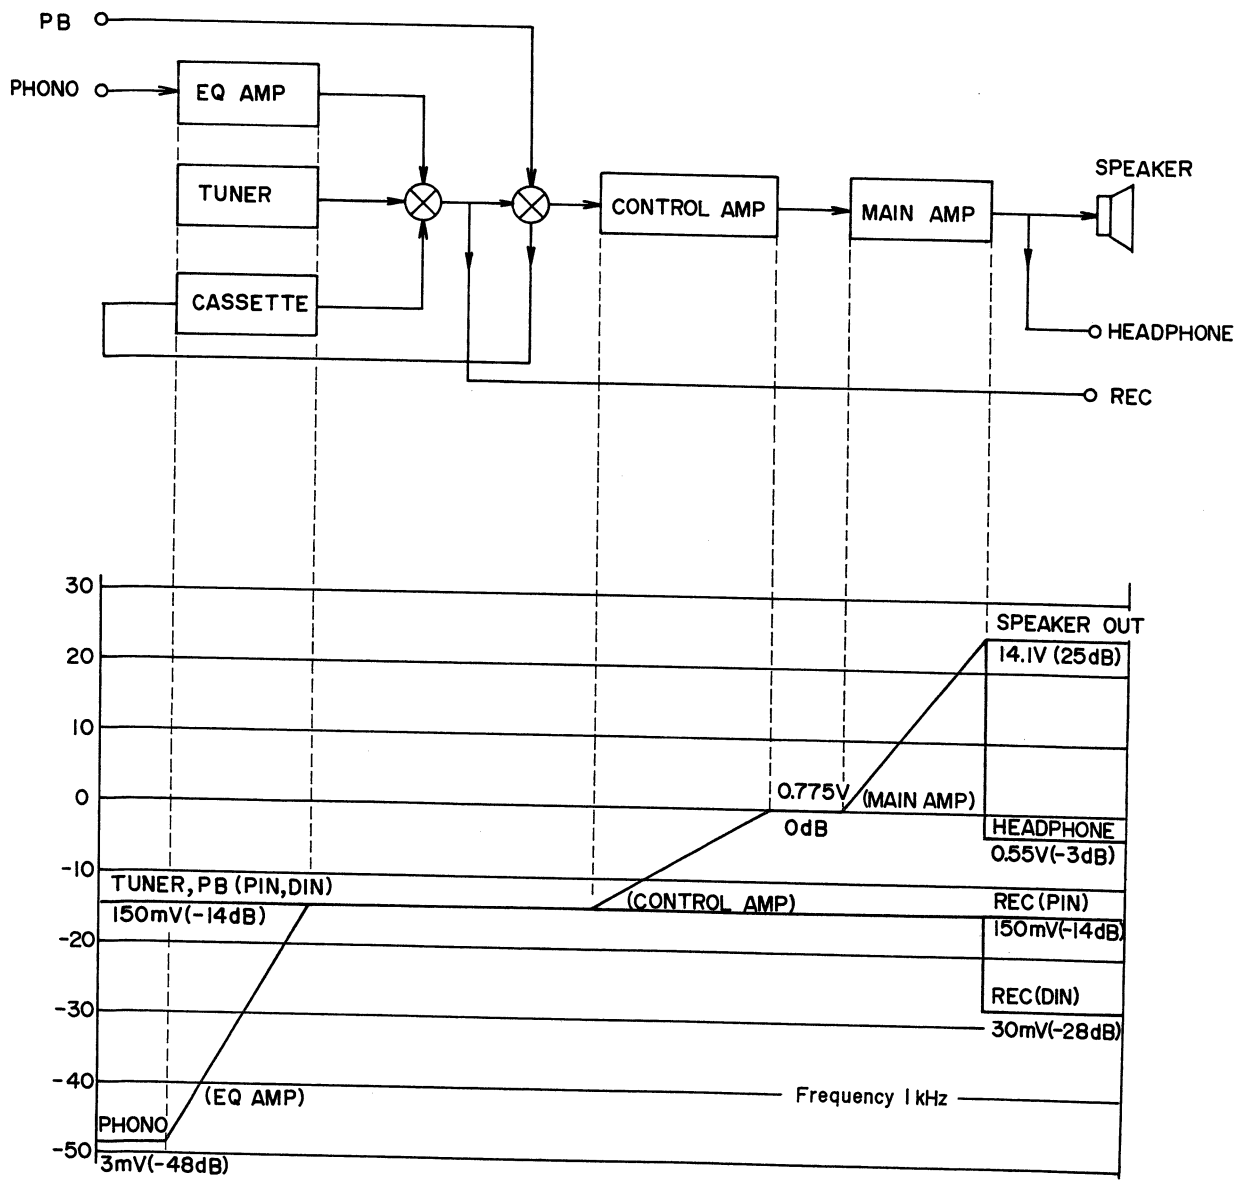

Fig. 13 Level Diagram of Model AC–3500/L

VII. TUNER ADJUSTMENT

1. MODEL AC–3500 TUNER ADJUSTMENT

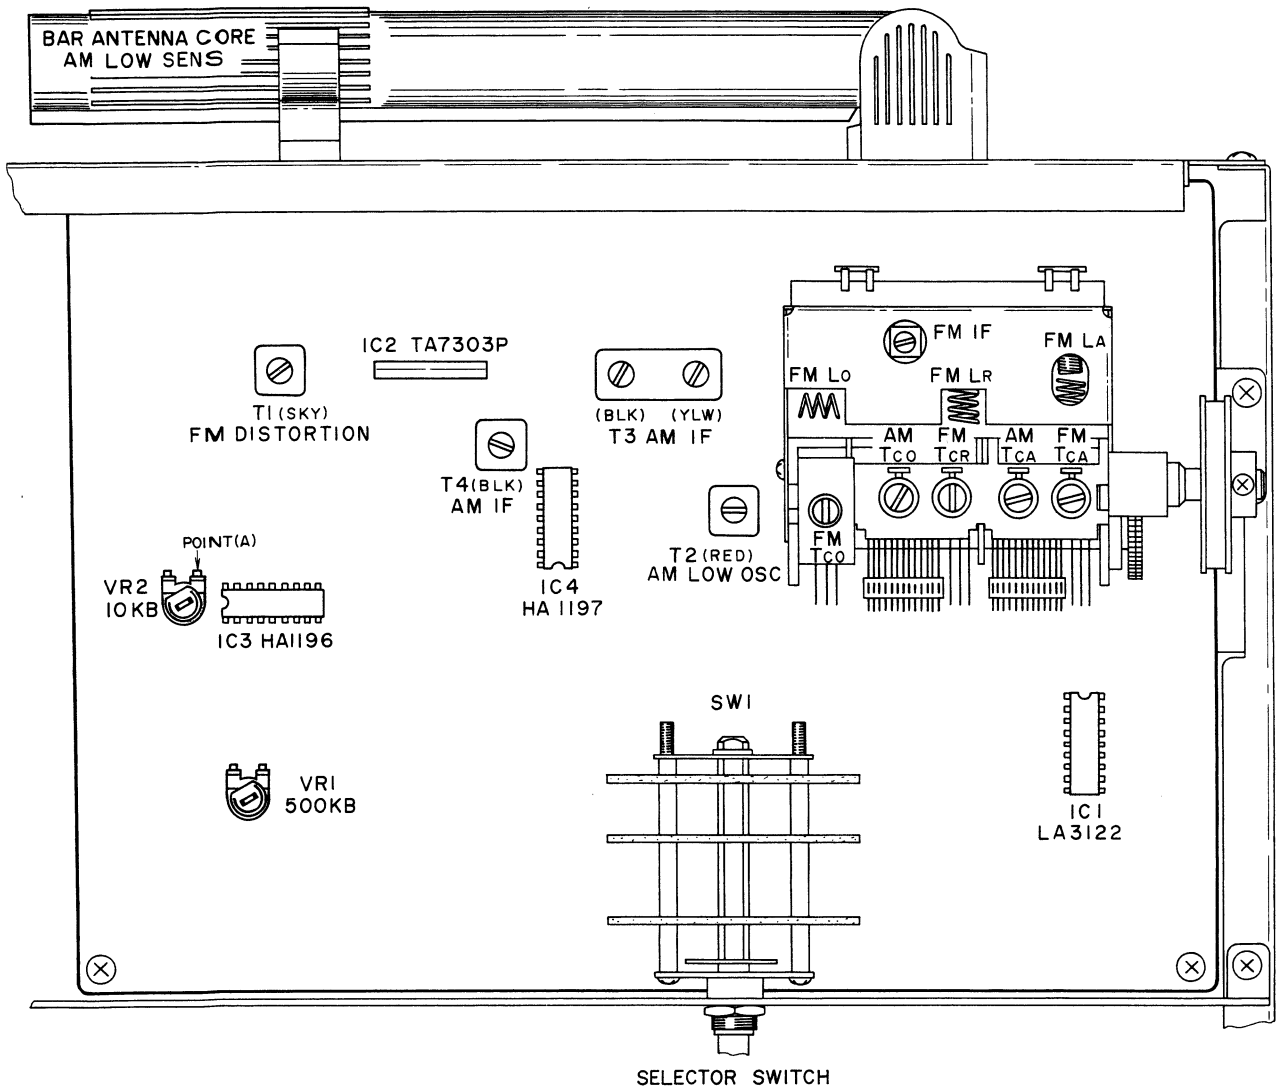

Fig. 14 Tuner Adjustment

1) FM SECTION ADJUSTMENT (Refer to Fig. 14)

Step	Adjustment Item	Adjustment Point	Result	Remarks
1	Front end IF coil	IF coil (Front end)	Maximum noise level	SELECTOR to "FM". MODE to "MONO". Set dial to where there is no broadcast signal.
2	High range scale indication	FM Tco condenser (Front end)		108 MHz, 60 dB (mono) input. TUNING INDICATOR to 108 MHz. Error: ±250 kHz
3	Confirmation of low range indication			88 MHz, 60 dB (mono) input. TUNING INDICATOR to 88 MHz. Error: ±250 kHz. (See Note 1)
4	High range sensitivity	FM TCA, TCR trimmer condensers (Front end)	Less than 3% distortion factor	108 MHz, 14 dB (mono) input
5	Confirmation of low range sensitivity		Less than 3% distortion factor	88 MHz, 14 dB (mono) input (See Note 2)
6	Distortion factor	T1 (SKY core)	Less than 0.5% distortion factor	98 MHz, 60 dB (mono) input (See Note 3)
7	PLL free running frequency	VR2 10 kB (AC-3502)	76.00 kHz	Prepare frequency counter, and then connect 1/4W 100 kohms resistor between frequency counter and point "A" of Multi function P.C Board (AC-3502). MODE SW. to "STEREO (FM MUTE)".
8	Stereo indicator lighting confirmation		Stereo indicator (IND 1) lights	98 MHz, 60 dB (stereo) input. No stereo separation when stereo indicator does not light.
9	Stereo separation (Left channel)	VR1 500 kB (AC-3502)	More than 35 dB	98 MHz, 60 dB (stereo) right channel input. Less than 0.7% distortion factor. (See Note 3)
10	Stereo separation (Right channel)		More than 35 dB	98 MHz, 60 dB (stereo) left channel input. Less than 0.7% distortion factor. (See Note 3)
11	Confirmation of signal meter indication		Around 3 indication	98 MHz, 100 dB (mono) input

Chart 1

Notes:
1. When the low range indication error does not fall within the specified data, adjust the Front End local oscillator coil Lo's coil pitch and repeat adjustments in Steps 2 and 3.
2. When the specified sensitivity of 14 dB cannot be obtained at three frequency points of 88 MHz, 98 MHz, and 108 MHz, repeat adjustment in Step 4.
3. When the distortion factor or the stereo separation still do not comply with the data specifications, adjust by turning the Front End FM IF coil core but not more than 1/2 turn.

1) FM SECTION ADJUSTMENT

FM section adjustment is same as model AC-3500.

2) LW SECTION ADJUSTMENT (Refer to Fig. 15)

Step	Adjustment Item	Adjustment Point	Result	Remarks
1	Low range scale indication	T5 (GRN) LW OSC coil	Maximum output	Selector SW. to "LW". 160 kHz optional input.
2	Low range sensitivity	Bar antenna coil. T3 (YLW,BLK core). T4 (BLK core) (AC-3502).	Maximum output minimum distortion factor	160 kHz optional input
3	High range scale indication	Tc2b LW OSC trimmer	Maximum output	340 kHz optional input
4	High range sensitivity	Tc1b LW antenna trimmer	Maximum output, minimum distortion factor	340 kHz optional input

Chart 3

3) MW SECTION ADJUSTMENT (Refer to Fig. 15)

Step	Adjustment Item	Adjustment Point	Result	Remarks
1	Low range scale indication	T2 (RED core) MW OSC coil (AC-3502)	Maximum output	Selector SW. to "AM". 520 kHz, 50 dB input. Tuning indicator to 600 kHz. Error within 2%.
2	Low range sensitivity	Bar antenna MW core (Rear panel)	Maximum output, minimum distortion factor.	520 kHz, 50 dB input. Less than 10% distortion factor.
3	High range scale indication	Tc2a MW OSC trimmer (AC-3502)	Maximum output	1,400 kHz, 50 dB input. Tuning indicator to 1,400 kHz. Error within 2%.
4	High range sensitivity	Tc1a MW antenna trimmer	Maximum output, minimum distortion factor.	1,400 kHz, 50 dB input. Less than 10% distortion factor.

Chart 4

VIII. TUNING CORD THREADING

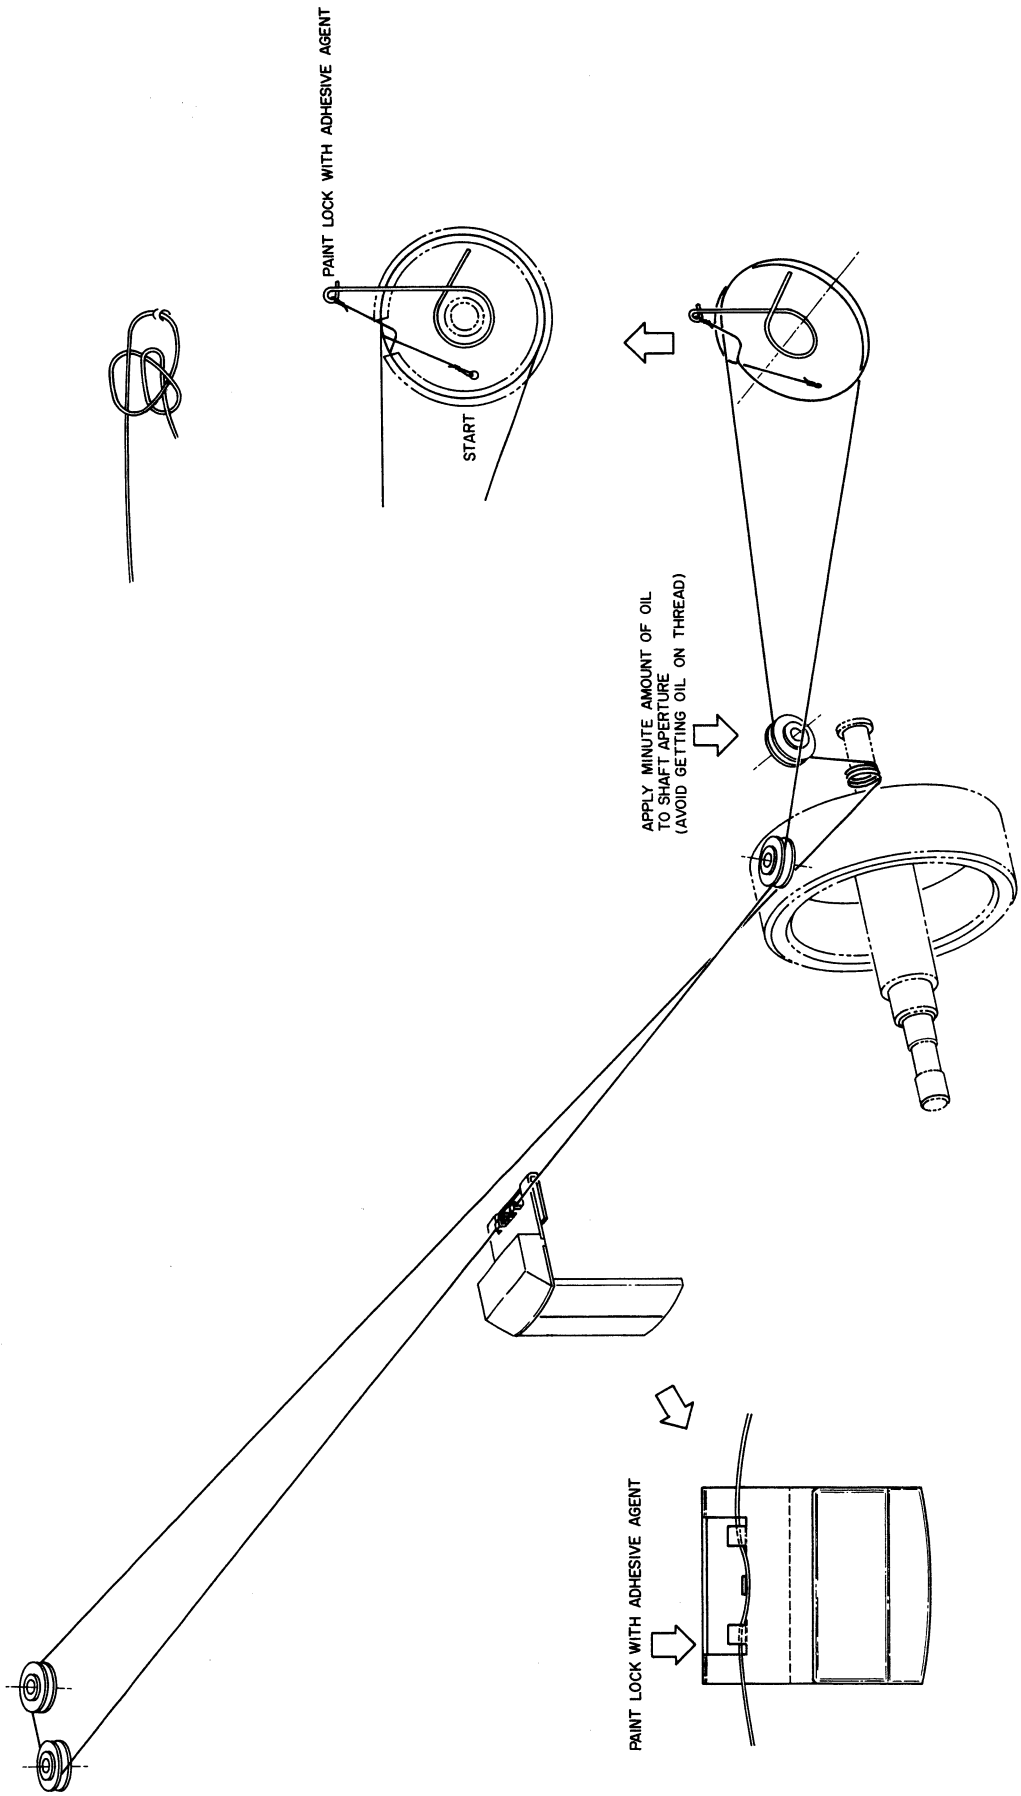
PAINT LOCK WITH ADHESIVE AGENT
START
APPLY MINUTE AMOUNT OF OIL
TO SHAFT APERTURE
(AVOID GETTING OIL ON THREAD)
PAINT LOCK WITH ADHESIVE AGENT

Fig. 16 Tuning Cord Threading

X. CASSETTE RECORDER AMP ADJUSTMENT

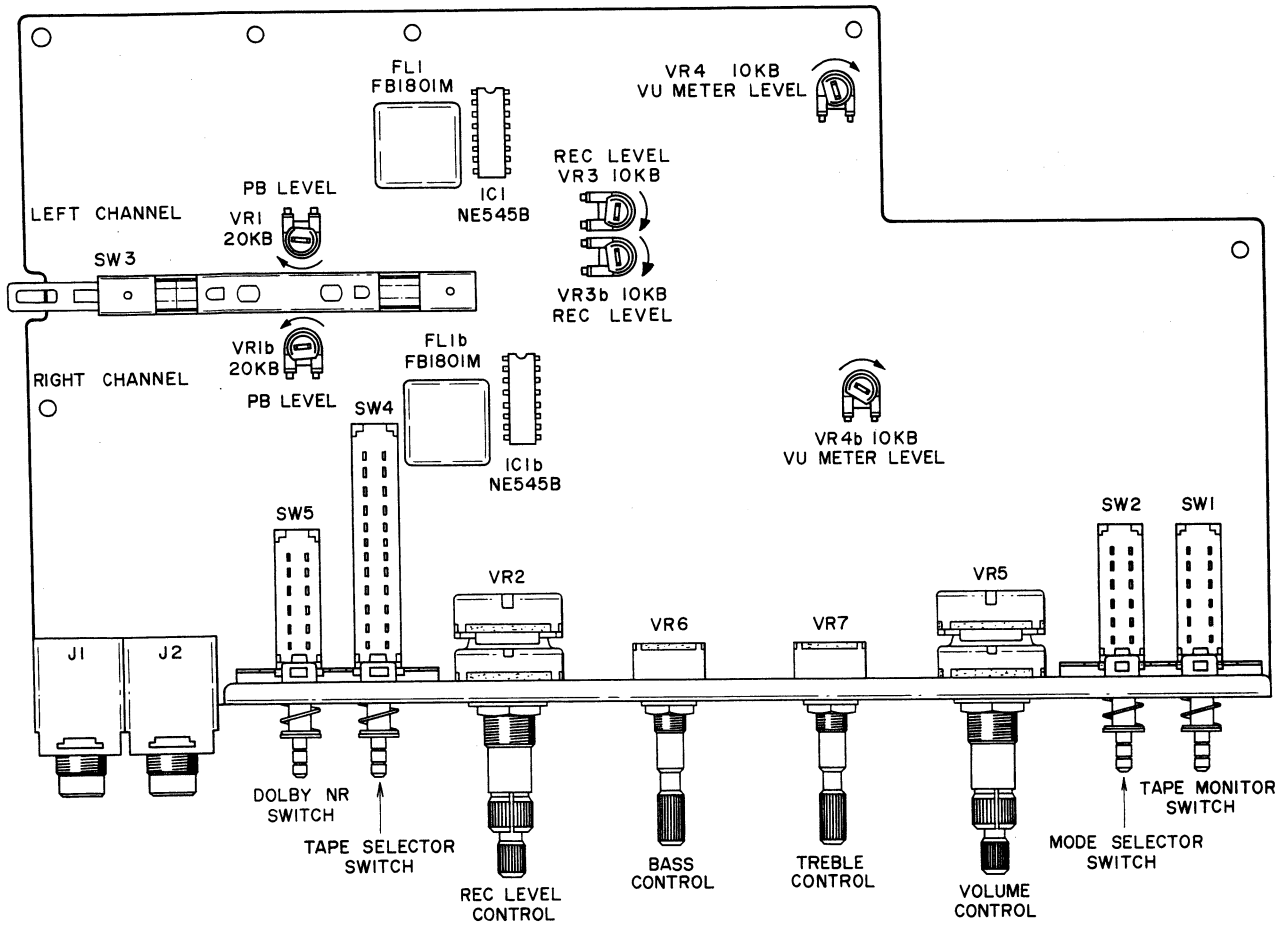

Fig. 23 Tone Control & Rec/PB P.C Board (AC–3501A) Adjustment

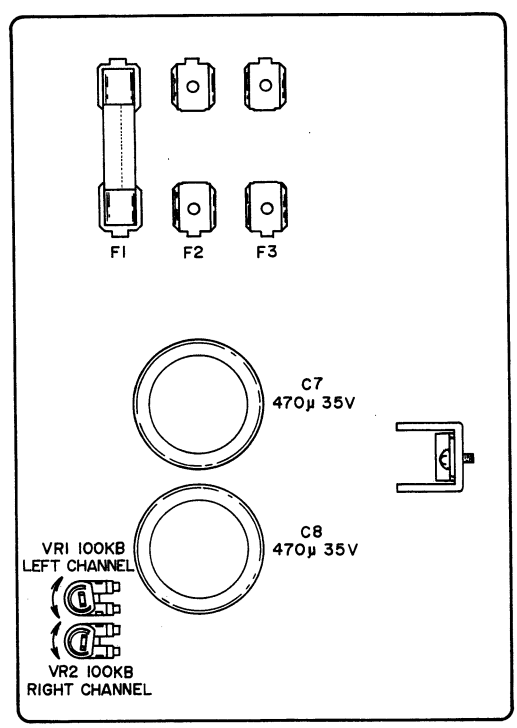

Fig. 24 Power Sys. Con & OSC P.C Board (AC–3503) Adjustment

Step	Adjustment Item	Test Tape, Supply Signal	Mode	Adjustment Point	Result	Remarks
1	Playback level adjustment	333 Hz, 0 VU test tape	PLAY	VR1, 20 kB	−14 ±0.5 dB (150 mV)	
2	VU meter sensitivity adjustment	333 Hz, 0 VU test tape	PLAY	VR4, 10 kB	0 VU indication	
3	Recording level adjustment	Low noise blank tape, 1,000 Hz, 0 VU recording	REC/ PLAY	VR3, 10 kB	−14 ±0.5 dB (150 mV)	Refer to Note 5
4	Frequency response adjustment	Low noise blank tape, 1,000 Hz, 10,000 Hz, −20 VU recording	REC/ PLAY	VR1, 100 kB (LEFT channel) VR2, 100 kB (RIGHT channel)	1,000 Hz to 10,000 Hz flat response	Refer to Note 5

Chart 5

Notes:
1. Connect measuring instruments as shown in Fig. 25.
2. Set Selector SW. to cassette.
3. Set Tape Selector to Low Noise.
4. Set Dolby N.R. Switch to OFF.
5. Set Monitor Switch to TAPE ON.
6. After Recording Level and Frequency Response Adjustments have been made with Low Noise Tape, confirm with Chrome.
7. Because each of these adjustments are vital to perfect Dolby N.R. circuit operation, be sure that they are carried out with as little error as possible.
8. Use the following cassette measuring tape:
   Low Noise Tape: Fuji C–60LN
   Chrome Tape: TDK SA C–60

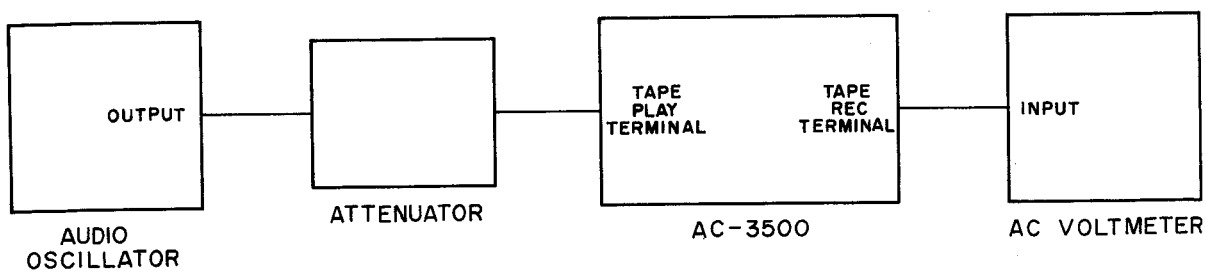

Fig. 25 Measuring Instruments Connection

2) MULTI FUNCTION P.C BOARD AC–3502 AC–3500

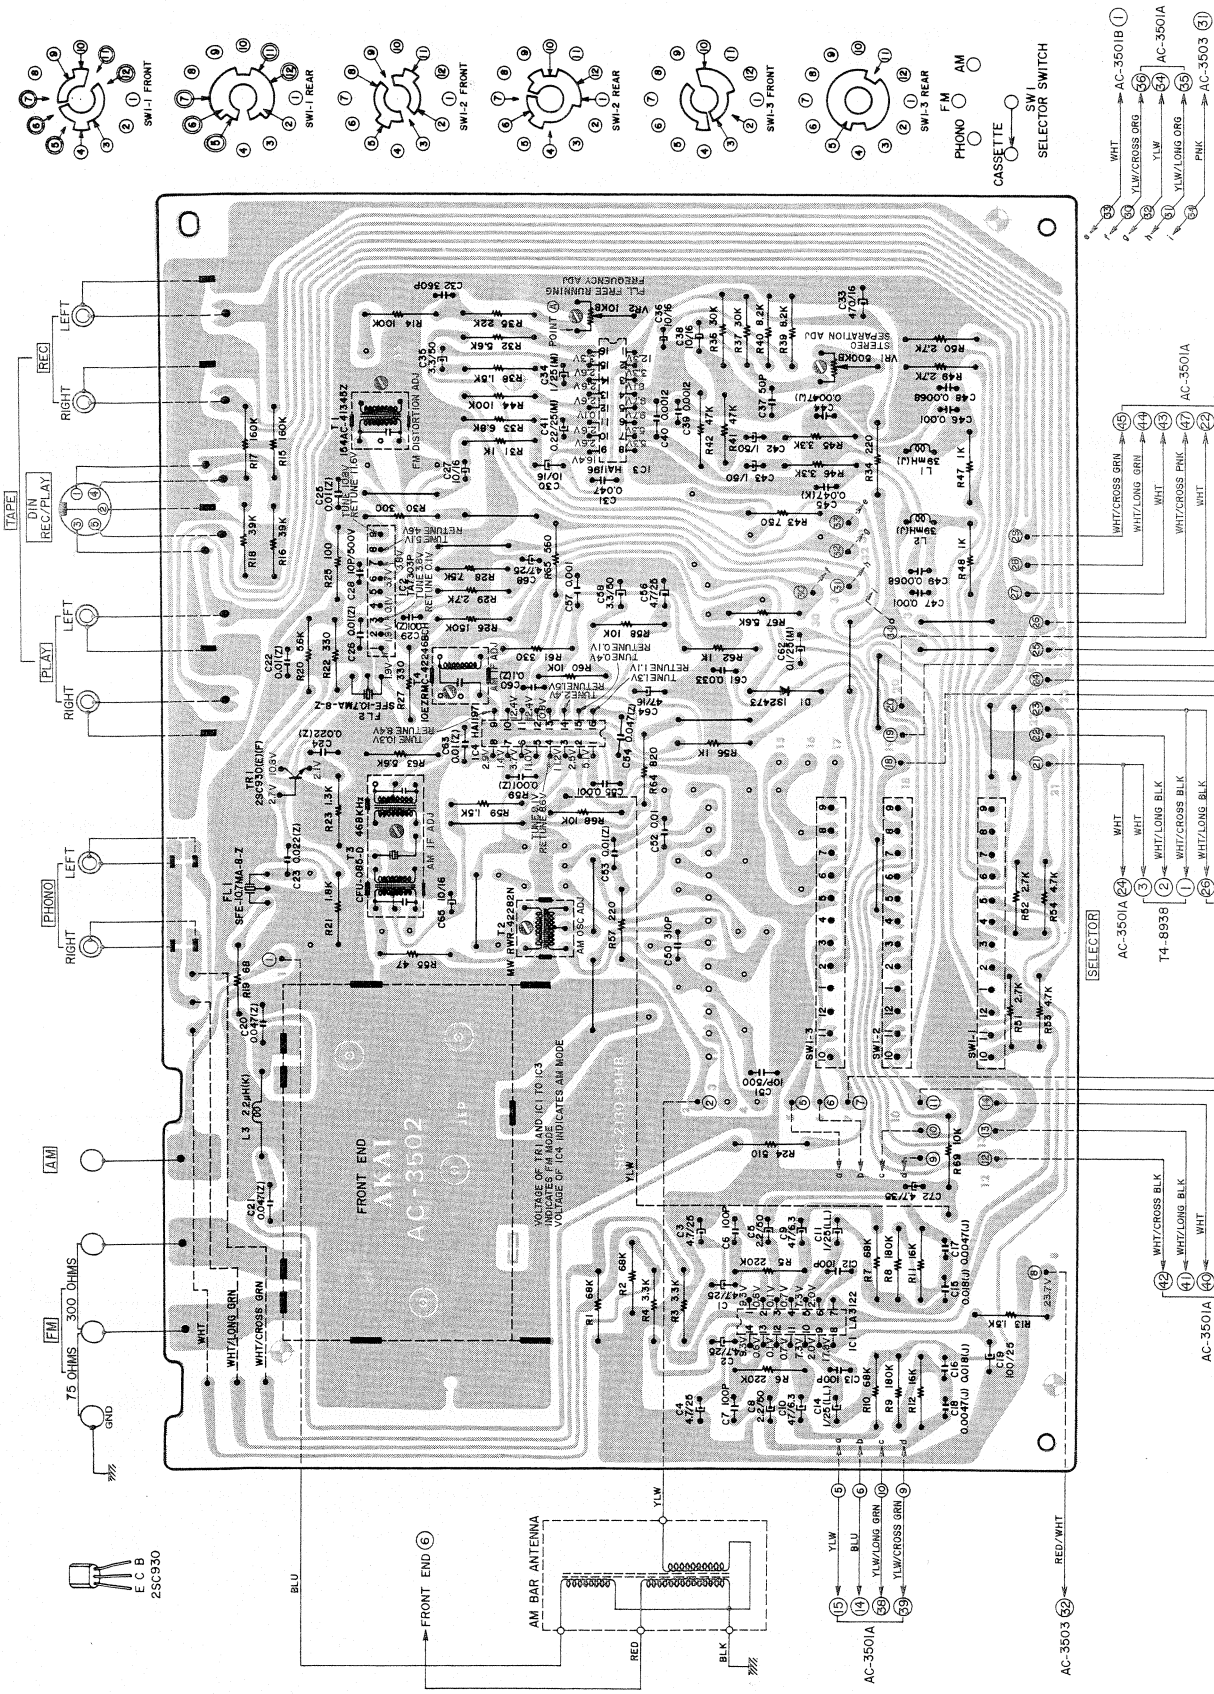

3) MULTI FUNCTION P.C BOARD AC–3502 AC–3500L

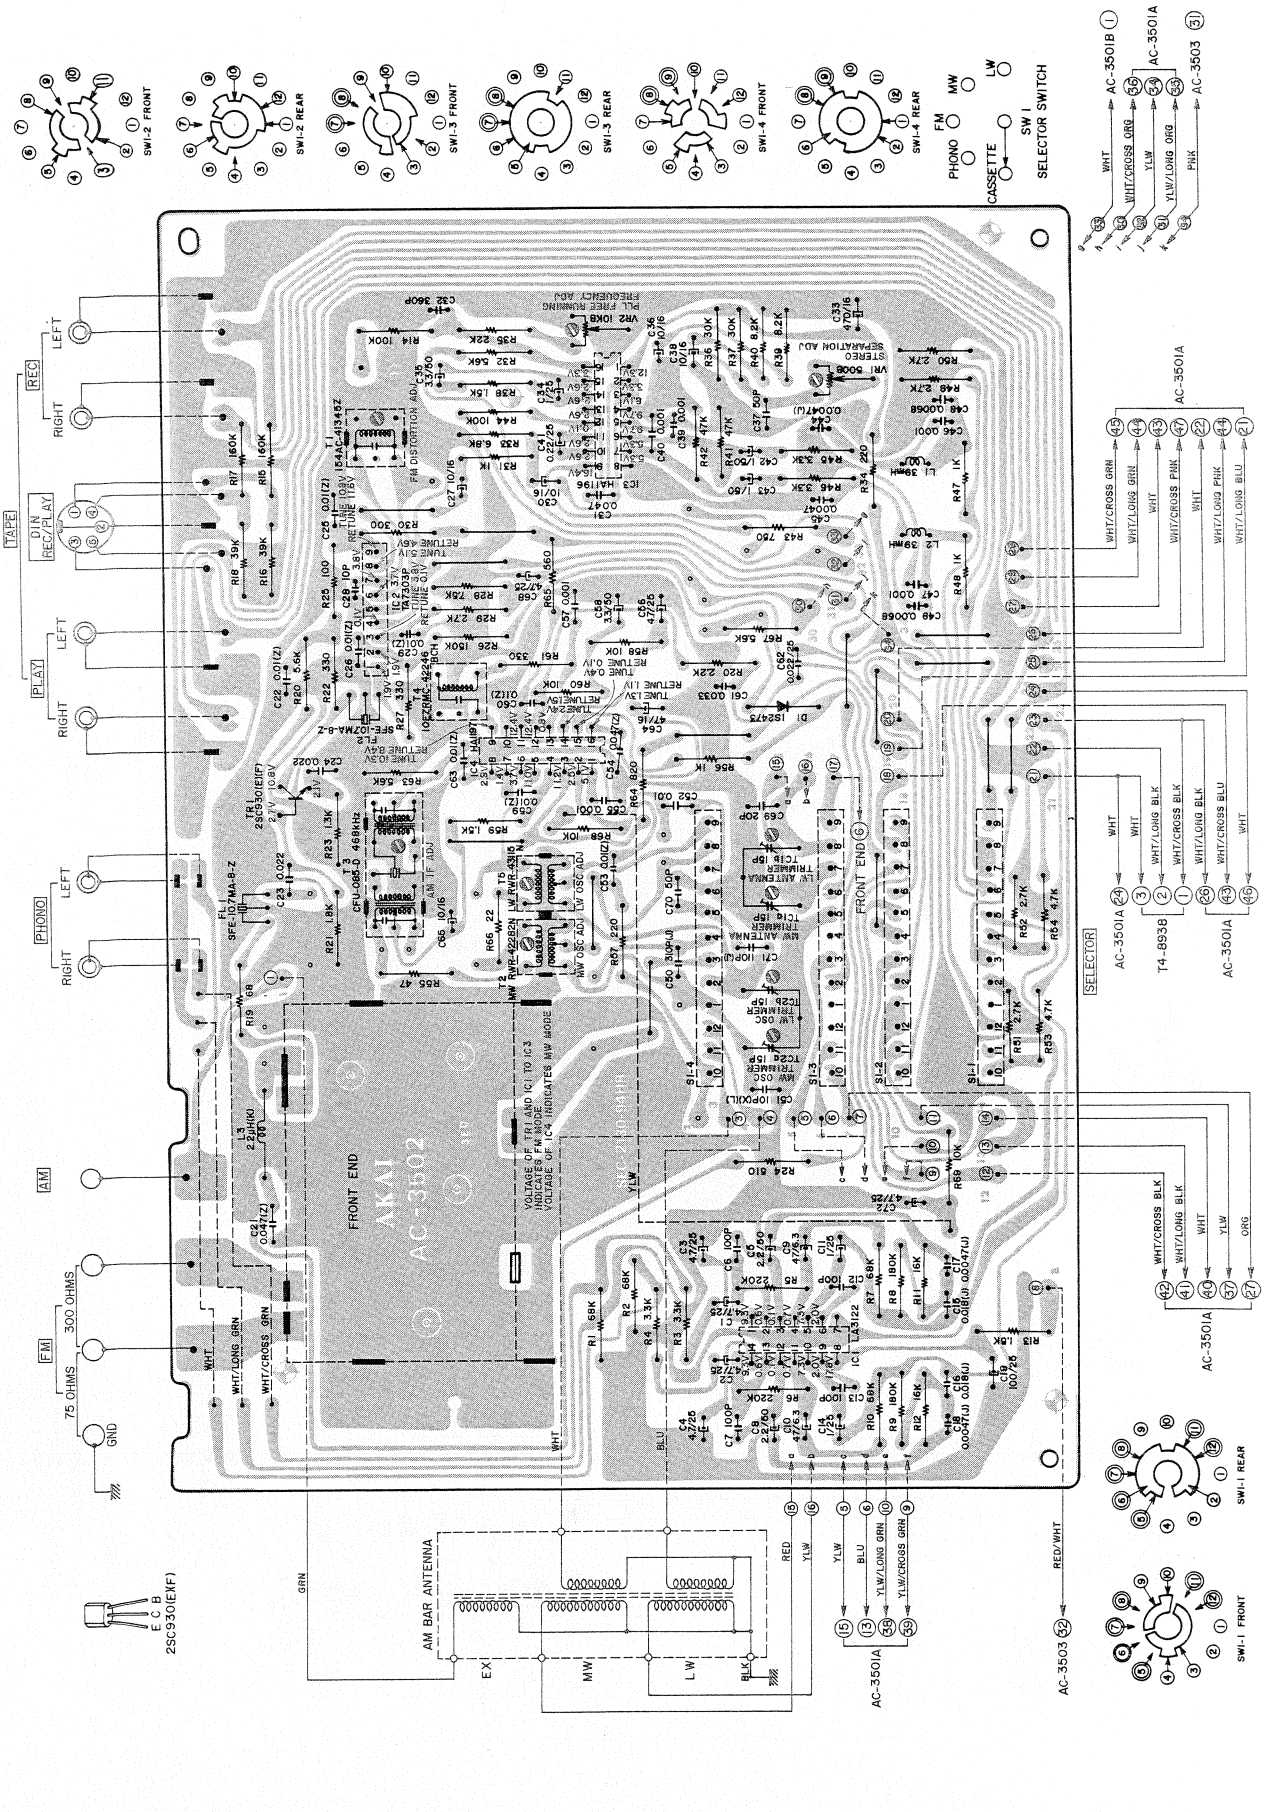

4) POWER, SYS. CON AND OSC P.C BOARD AC–3503 AC–3500/L (U/T TYPE)

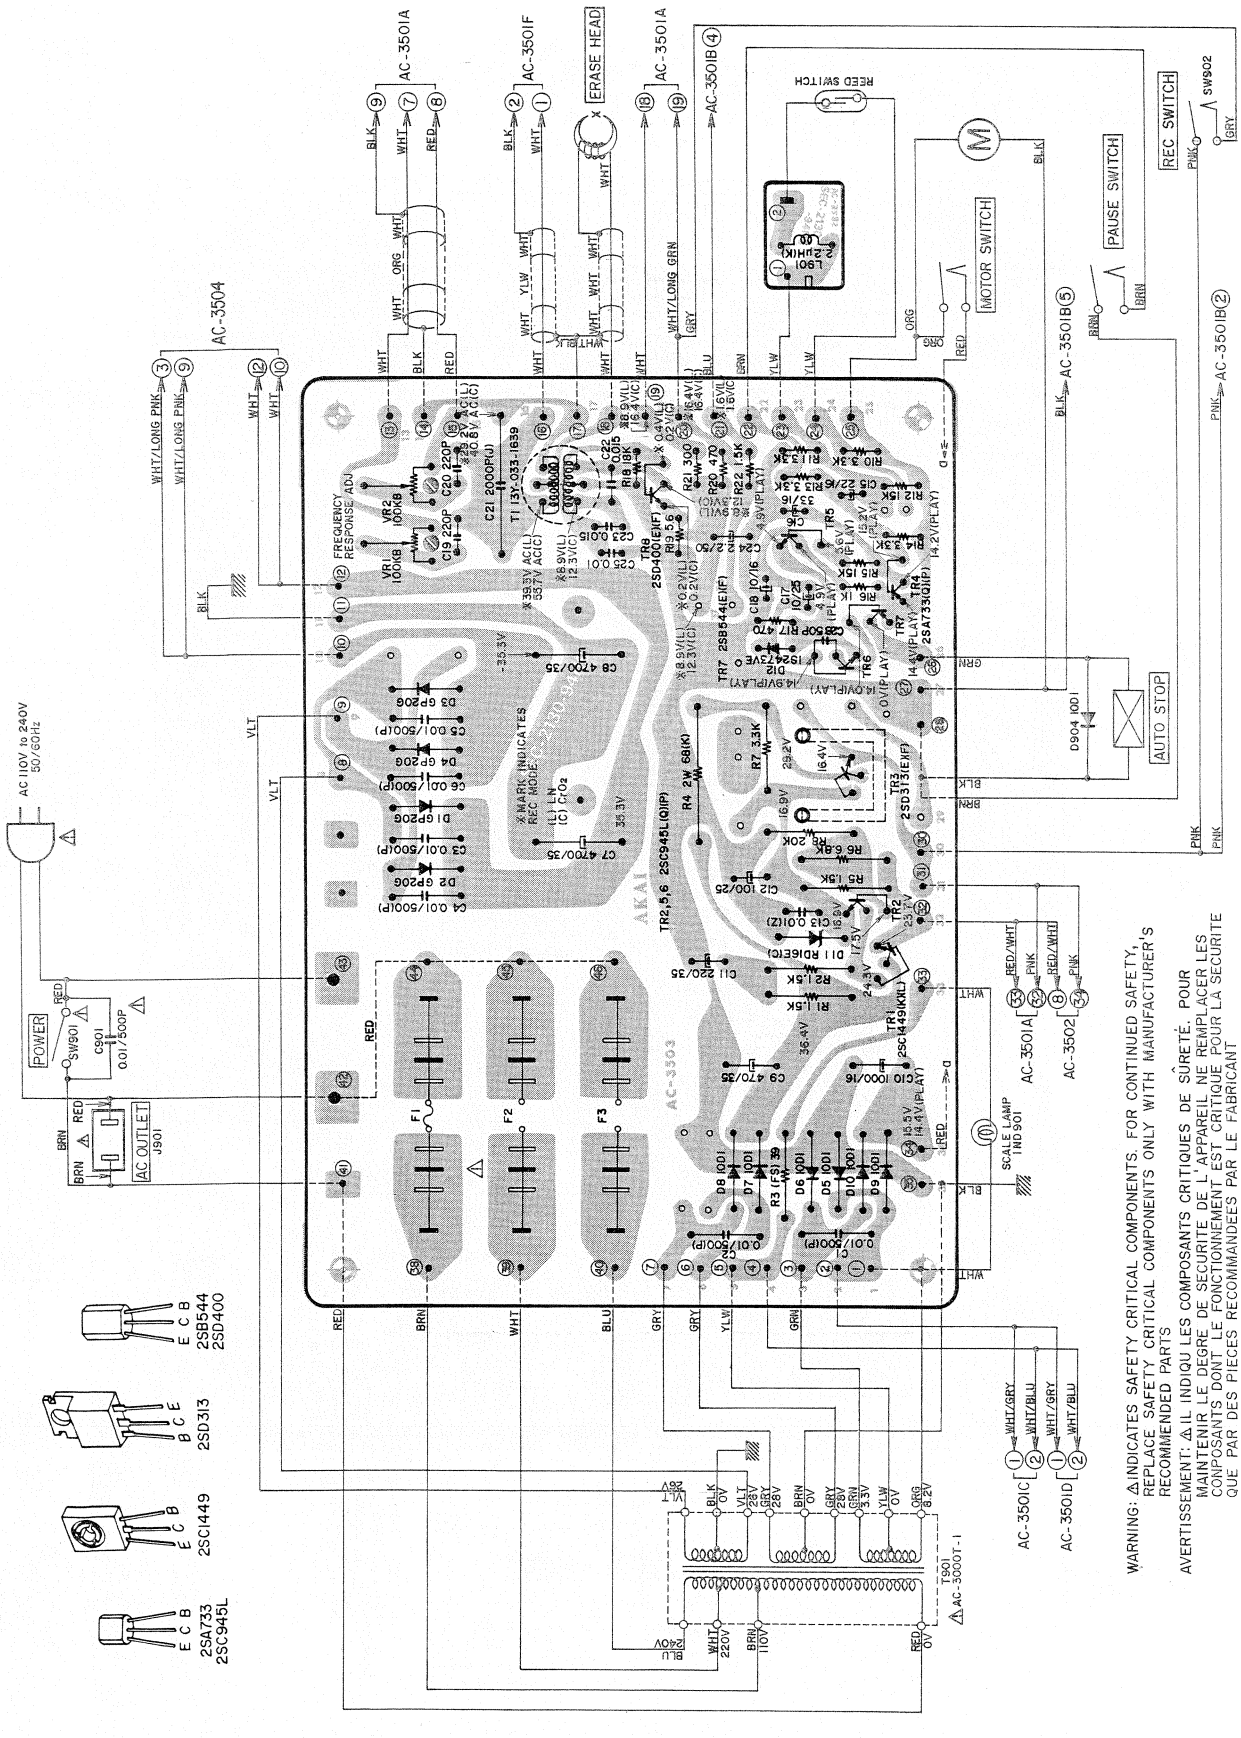

5) POWER, SYS. CON AND OSC P.C BOARD AC–3503 AC–3500 (CSA TYPE)

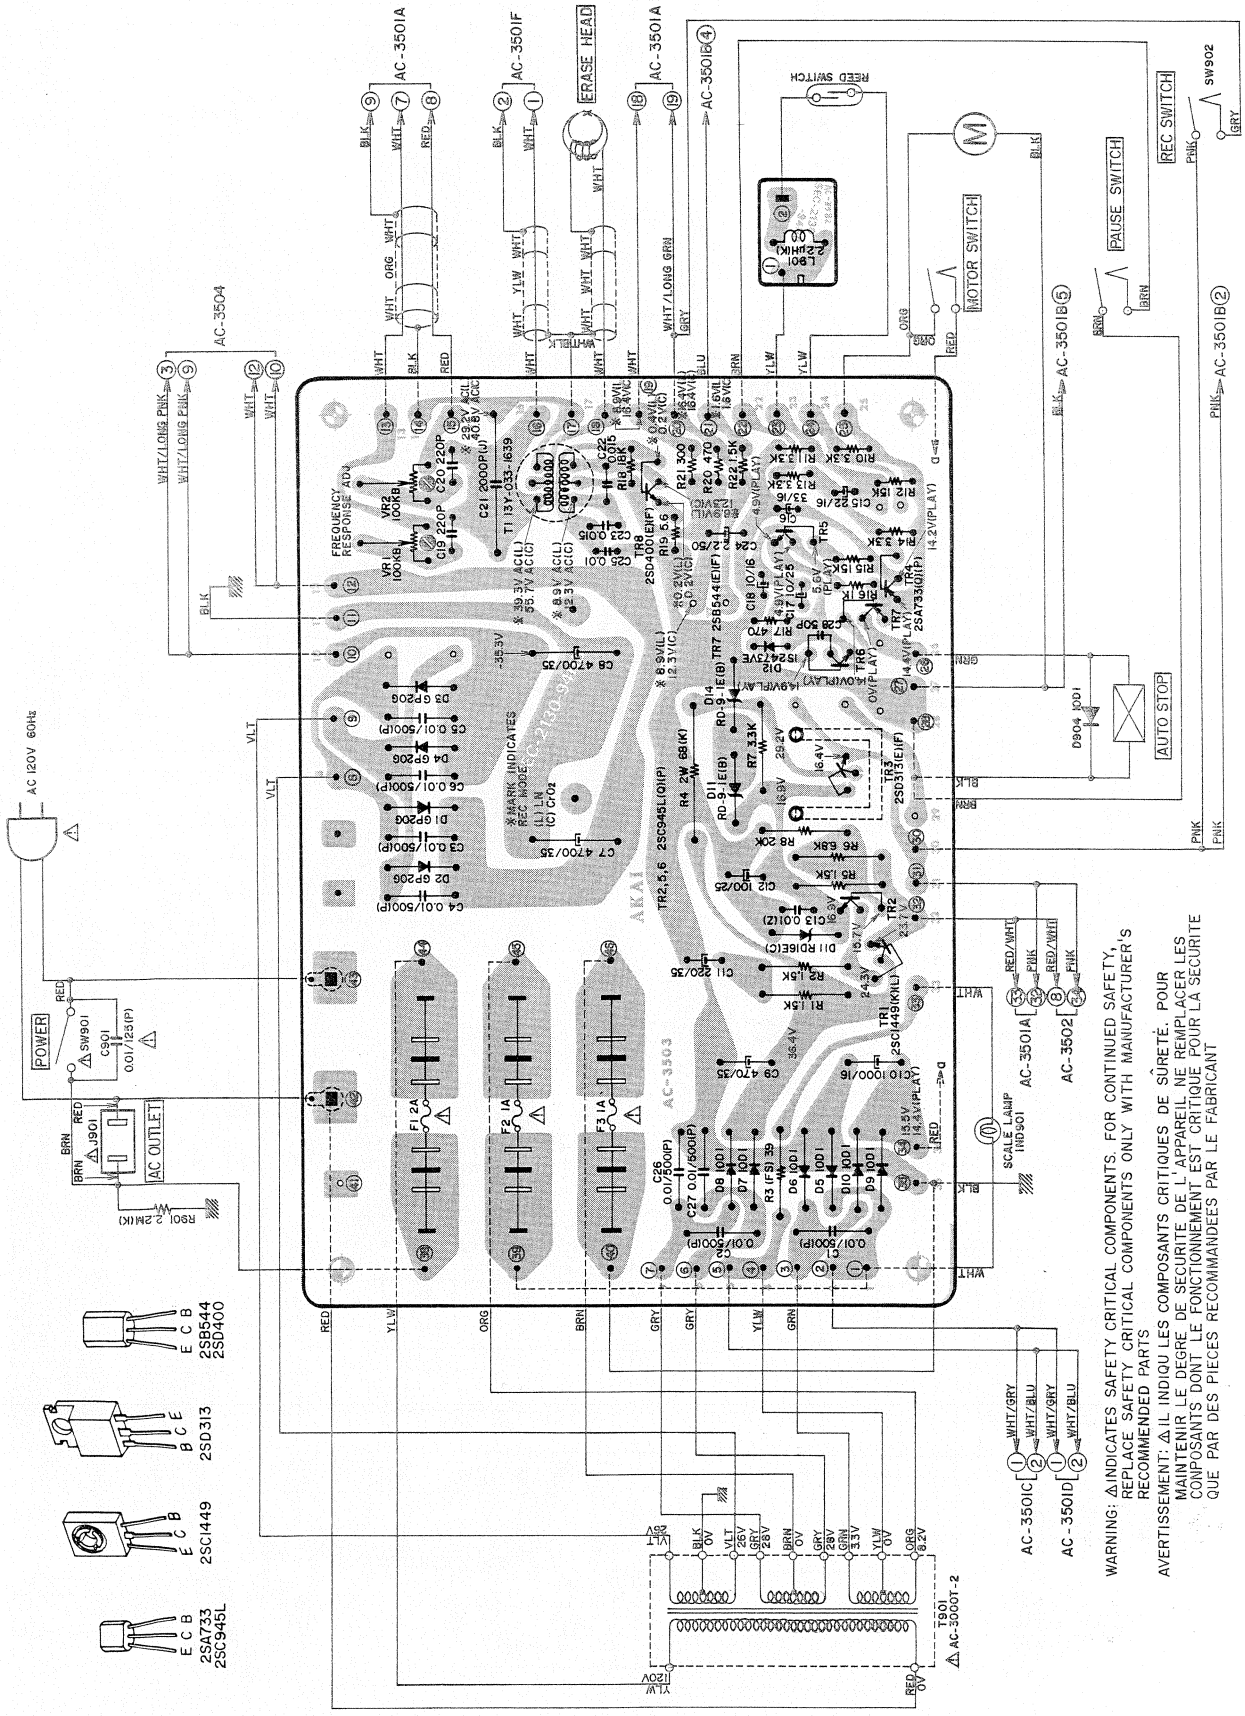

6) POWER, SYS. CON AND OSC P.C BOARD AC–3503 AC–3500L (CEE, BEAB TYPE)

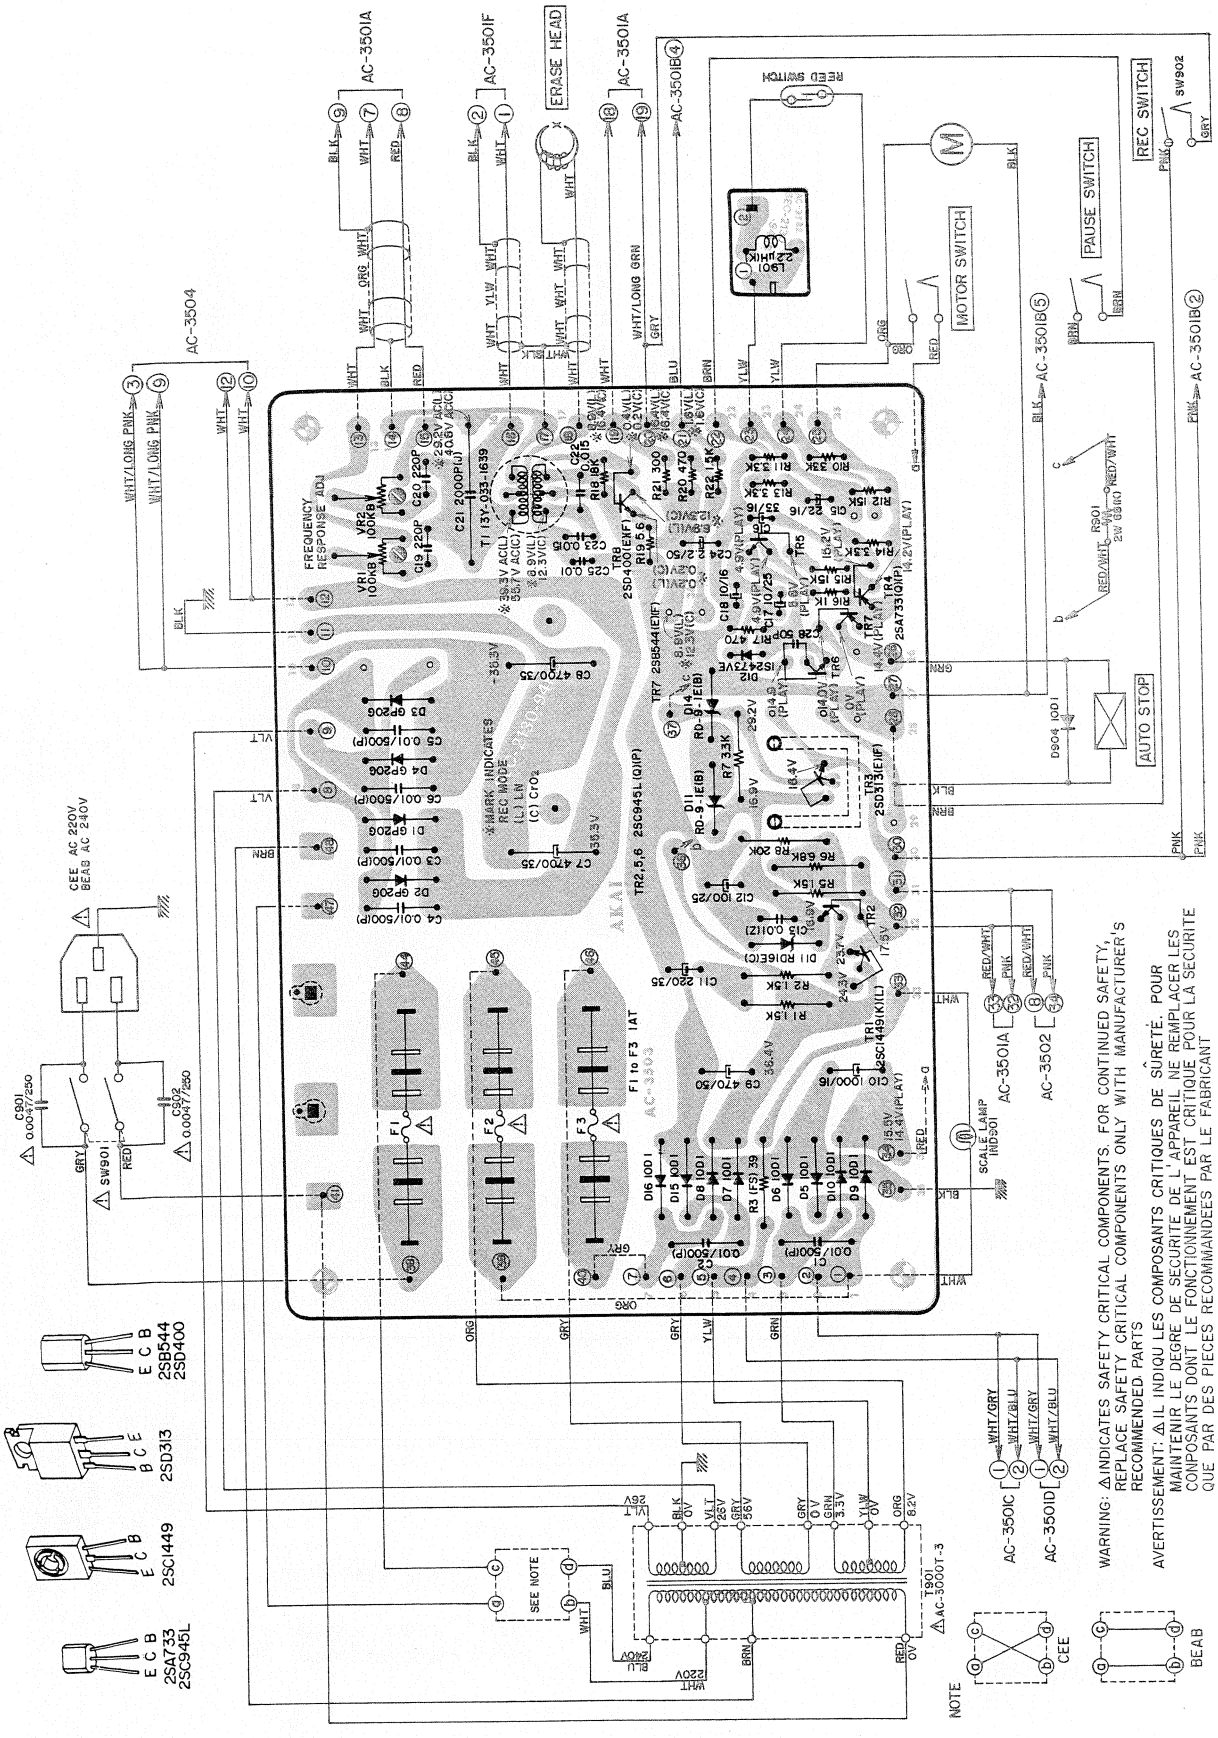

7) MAIN AMP P.C BOARD AC–3504 AC–3500L (U/T TYPE) AC–3500L (CEE, BEAB TYPE)

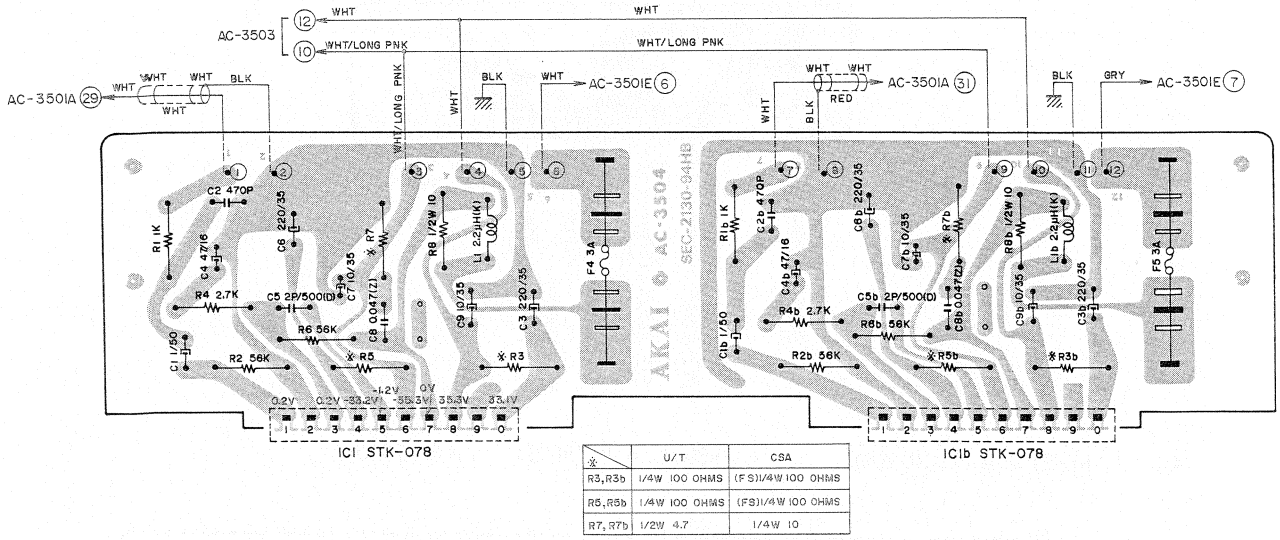

※	U/T	CSA
R3,R3b	1/4W 100 OHMS	(FS)1/4W 100 OHMS
R5,R5b	1/4W 100 OHMS	(FS)1/4W 100 OHMS
R7,R7b	1/2W 4.7	1/4W 10

8) MAIN AMP P.C BOARD AC–3504 AC–3500 (CEE, BEAB TYPE)

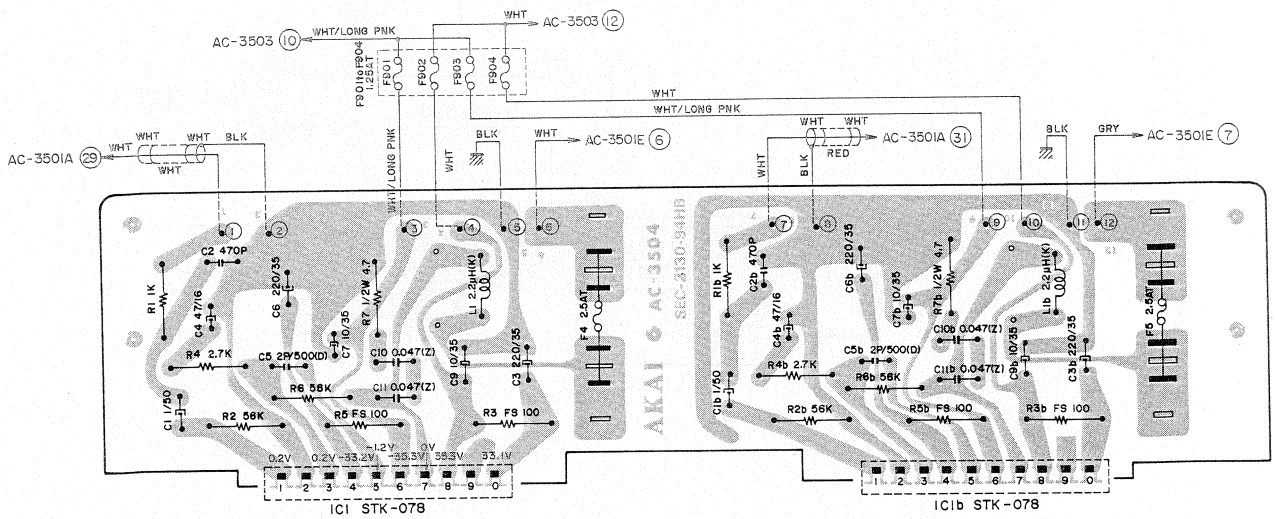

9) LED P.C BOARD AC–3501B AC–3500/L

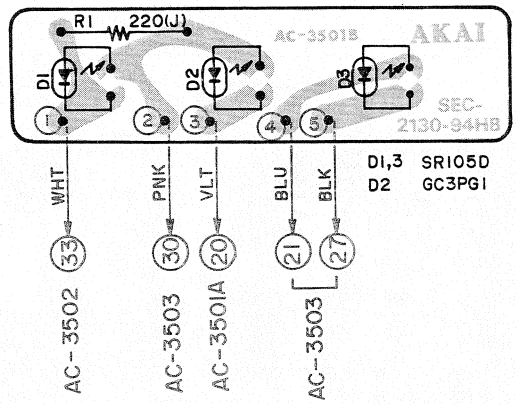

10) LAMP B & A P.C BOARD AC–3501C, AC–3501D AC–3500/L

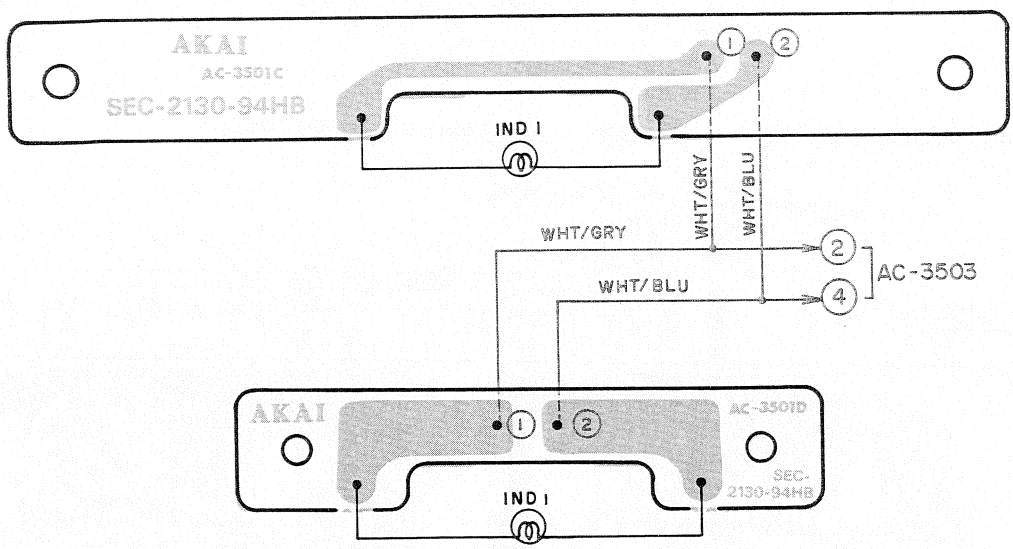

11) HEADPHONE P.C BOARD AC–3501E AC–3500/L

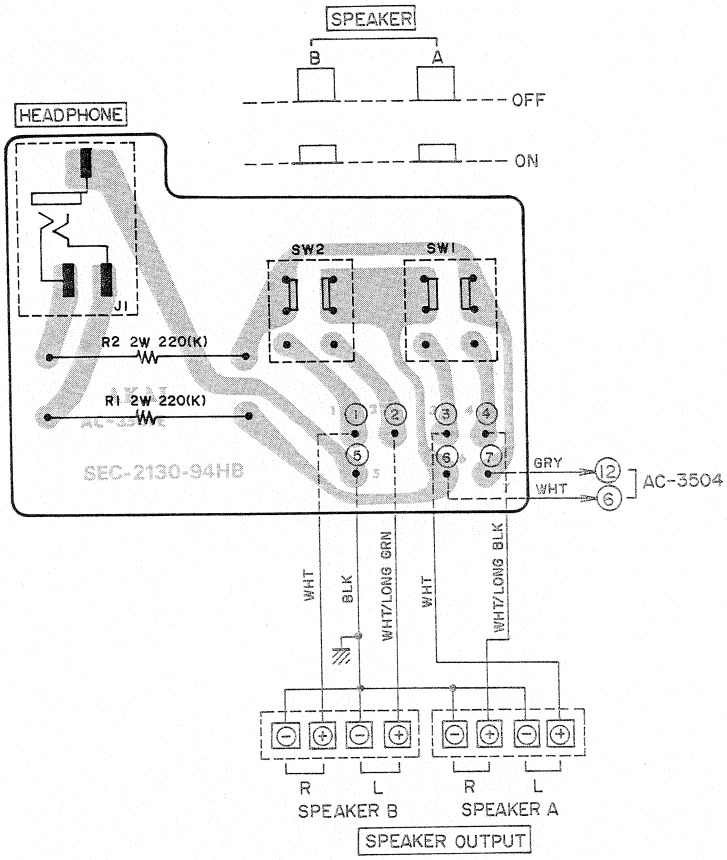

12) BEAT SWITCH P.C BOARD AC–3501F AC–3500/L

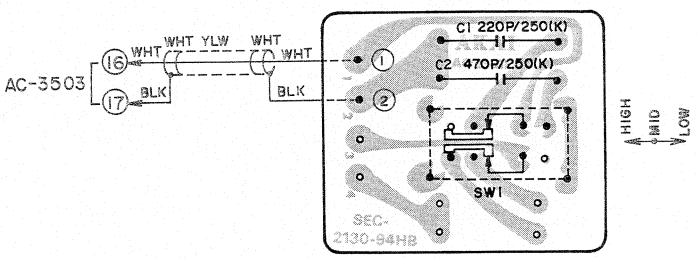

13) MUTE SWITCH P.C BOARD T4–8938 AC–3500/L

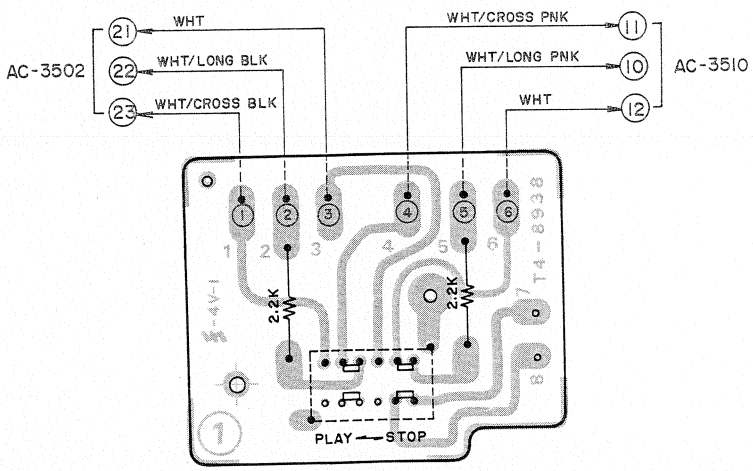

SECTION 2

PARTS LIST

TABLE OF CONTETNS

1. RECOMMENDED SPARE PARTS LIST 38
2. MECHA BLOCK 40
3. TONE CONTROL & REC/PB P.C BOARD (AC-3501A) BLOCK . . 42
4. MULTI FUNCTION P.C BOARD (AC-3502) BLOCK 42
5. POWER' SYS. CON & OSC P.C BOARD (AC-3503) BLOCK 43
6. MAIN AMP P.C BOARD (AC-3504) BLOCK 43
7. ASSEMBLY BLOCK 44
8. REAR PANEL BLOCK 46
9. FINAL ASSEMBLY BLOCK 49
10. LIST OF INTERCHANGEABLE SEMICONDUCTORS 50

INDEX 51

Resistor and Capacitor which is not listed in this parts list, please refer to COMMON LIST FOR SERVICE PARTS.

HOW TO USE THIS PARTS LIST

1. This parts list is compiled by various individual blocks based on assembly process.
2. When ordering parts, please describe parts number, serial number, and model number in detail.
3. How to read list.

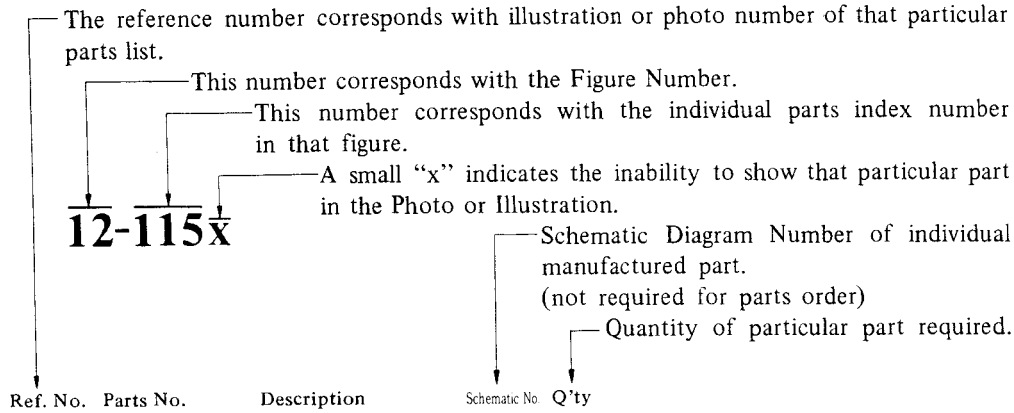
The reference number corresponds with illustration or photo number of that particular parts list.
This number corresponds with the Figure Number.
This number corresponds with the individual parts index number in that figure.
A small "x" indicates the inability to show that particular part in the Photo or Illustration.
12-115x
Schematic Diagram Number of individual manufactured part.
(not required for parts order)
Quantity of particular part required.

Ref. No.	Parts No.	Description	Schematic No.	Q'ty
		FLYWHEEL BLOCK #13		
12-115x	800425	Flywheel Block Assy. Comp.	RDG #13	1
12-116	244506	Flywheel Only	RD-233	1
12-117x	244754	Felt, Flywheel	RD-275	1
12-118	251324	Main Metal Case	RD-236	1
12-119	253080	Main Metal	RD-237	1

4. The symbol numbers shown on the P.C. Board list can be matched with the Composite Views of components of the Schematic Diagram or Service Manual.
5. The indications of Resistors and Capacitors in the photos of P.C. Board are being eliminated.
6. The shape of the parts and parts name, etc. can be confirmed by comparing them with the parts shown on the Electrical Parts Table of P.C. Board.
7. Both the kind of part and installation position can be determined by the Parts Number. To determine where a parts number is listed, utilize Parts Index at end of Parts List.
   It is necessary first of all to find the Parts Number. This can be accomplished by using the Reference Number listed at right of parts number in the Parts Index. (meaning of ref. no. outlined in Item 3 above).
8. Utilize separate "Price List for Parts" to determine unit price. The most simple method of finding parts Price is to utilize the reference number.

CAUTION:

1. When placing an order for parts, be sure to list the parts no. model no., and description. There are instances in which if any of this information is omitted, parts cannot be shipped or the wrong parts will be delivered.
2. Please be careful not to make a mistake in the parts no. If the parts no. is in error, a part different from the one ordered may be delivered.
3. Because parts number and parts unit supply in the Preliminary Service Manual (Basic Parts List) may be partially changed, please use this parts list for all future reference.

WARNING: ⚠ INDICATES SAFETY CRITICAL COMPONENTS. FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMEMNDED PARTS.

AVERTISSEMENT: ⚠ IL INDIQU LES COMPOSANTS CRITIQUES DE SURETE. POUR MAINTENIR LE DEGRE DE SECURITE DE L'APPAREIL NE REMPLACER LES COMPOSANTS DONT LE FONCTIONNEMENT EST CRITIQUE POUR LA SECURITE QUE PAR DES PIECES RECOMMANDEES PAR LE FABRICANT.

AC INLET SYSTEM

This model is equipped with an AC INLET SYSTEM. Please refer to the AC INLET SYSTEM CHART below for the specific type. By the AC INLET SYSTEM, AC (mains) cord can be connected to and disconnected from the model because the model is provided with socket exclusively for AC (mains) cord on its main body.
Please note, however, that certain models are not equipped with this system and has a built-in AC (mains) cord as before.

AC INLET SYSTEM CHART

CLASS I

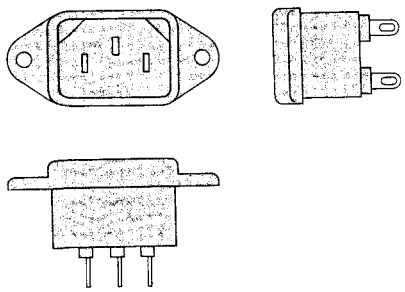

Picture 1
AC INLET to be installed on machines

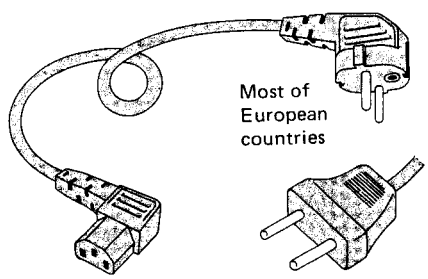

Picture 2
AC (mains) cord

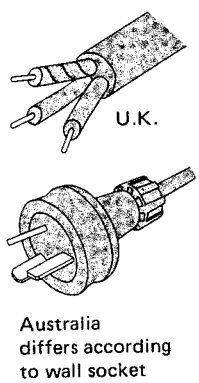

CLASS II

▣ This mark indicating double insulation will be attached to machine's rear panel

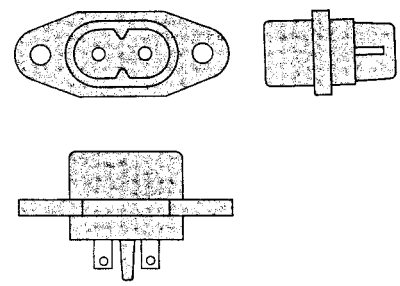

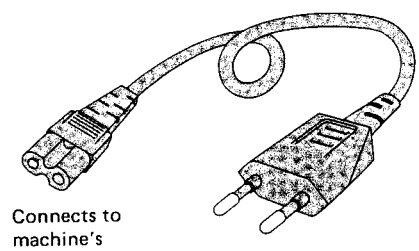

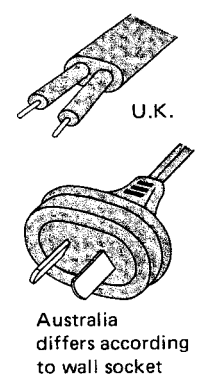

Parts List for AC (mains) Cord Set

Standard		Description	Type of AC Inlet	Parts No.
Class I	CEE	Cord Set CEE (3 cores)	3P	EW302993
	BEAB	Cord Set BEAB (3 cores)	3P	EW302994
	SAA	Cord Set SAA (3 cores)	3P	EW302996
	U/T	Cord Set U/T (3 cores)	3P	EW302646
Class II	CEE	Cord Set CEE (2 cores)	2P	EW638144
	BEAB	Cord Set BEAB (2 cores)	2P	EW302995
	SAA	Cord Set SAA (2 cores)	2P	EW302991
	U/T	Cord Set U/T (2 cores)	2P	EW302899

1. RECOMMENDED SPARE PARTS LIST

Because, if the parts listed below are on hand, almost any repair can be accomplished, we suggest that you stock these Recommended Spare Parts Items.

Parts No.	Description	Note
BA290632	Tone Control & Rec/PB P.C Board Comp. AC-3500	
BA290452	Multi Function P.C Board Comp. AC-3500	
BA290316	Multi Function P.C Board Comp. AC-3500L	
BA290755	Power, Sys. Con & OSC P.C Board Comp.	
BA290204	Power, Sys. Con & OSC P.C Board Comp. (CSA)	
BA304120	Power, Sys. Con & OSC P.C Board Comp. (CEE)	
BA290373	Main Amp P.C Board Comp.	
BA290261	Main Amp P.C Board Comp.	
BA290272	Main Amp P.C Board Comp. (CEE)	
EI697871	IC LA-3122	IC1 (AC-3502)
EI299441	IC TA-7303P	IC2 (AC-3502)
EI299452	IC HA-1196	IC3 (AC-3502)
EI299700	IC HA-1197	IC4 (AC-3502)
EI299608	IC STK-078	IC1 (AC-3504)
EI605013	IC NE545B	IC1 (AC-3501 A)
ET554657	Transistor 2SA733(P)(Q)	TR4 (AC-3503)
ET299531	Transistor 2SB54MP(E)(F)	TR7 (AC-3503)
ET618873	Transistor 2SC930(E)(F)	TR1 (AC-3502)
ET639437	Transistor 2SC945L(Q)(P)	TR4, 5 (AC-3501 A)
ET649034	Transistor 2SC1449(K)(L)	TR1 (AC-3503)
ET223446	Transistor 2SC1571NP(G)(H)	TR1 to TR3 (AC-3501 A)
ET299507	Transistor 2SD400MP(E)(F)	TR8 (AC-3503)
ED224526	Silicon Diode 10D1	D5, 6 (AC-3503)
ED245417	Silicon Diode GP-20G	D3, 4 (AC-3503)
ED560913	Silicon Diode 1S2473VE	D12 (AC-3503)
ED624903	Germanium Diode 1S188AM	D1 to D3 (AC-3501 A)
ED290722	Zener Diode RD-16 E (C)	D11 (AC-3503)
ED300269	Zener Diode RD-9-1E (B)(CSA)(CEE)	D11 (AC-3503)
ED283138	LED GC-3PGI	D2 (AC-3501B)
ED698826	LED SR105D	D1, 3 (AC-3501B)
EL283184	Lamp (L/T)	IND1 (AC-3501C, D)
EL698793	Lamp (Cord Type) 6V 65 mA(400M/M)	IND901
EM698815	VU Meter MG-20	M901, M902
E0290744	OSC Coil 13Y-033-1639	T1 (AC-3503)
E0299665	OSC Coil MW RWR-42282N	T2 (AC-3502)
BT698804	⚠ Power Trans. AC-3000T-1	
BT294120	⚠ Power Trans. AT-3000T-2 (CSA)	
BT294131	⚠ Power Trans. AC-3000T-3 (CEE, BEAB)	
ES299327	Push SW. JP7134	SW1, 2 (AC-3501 A)

Parts No.	Description	Note
ES299362	Slide SW. CL212E	SW3 (AC-3501A)
ES299294	Push SW. JP-7135	SW4, 5 (AC-3501A)
ES299428	Rotary SW. SR26N 3-8-4	SW1 (AC-3502)
ES299430	Rotary SW. SR26N 4-13-5 (AC-3500L)	SW1 (AC-3502)
ES224436	⚠Push SW. JP-1	SW901
ES242346	⚠Push SW. JP17 (CEE, BEAB)	SW901
ES246227	Slide SW. SSC323E	SW1 (AC-3501F)
ES698927	Push SW. JP-7136	SW1, 2 (AC-3501E)

2. ILLUSTRATION OF MECHA BLOCK

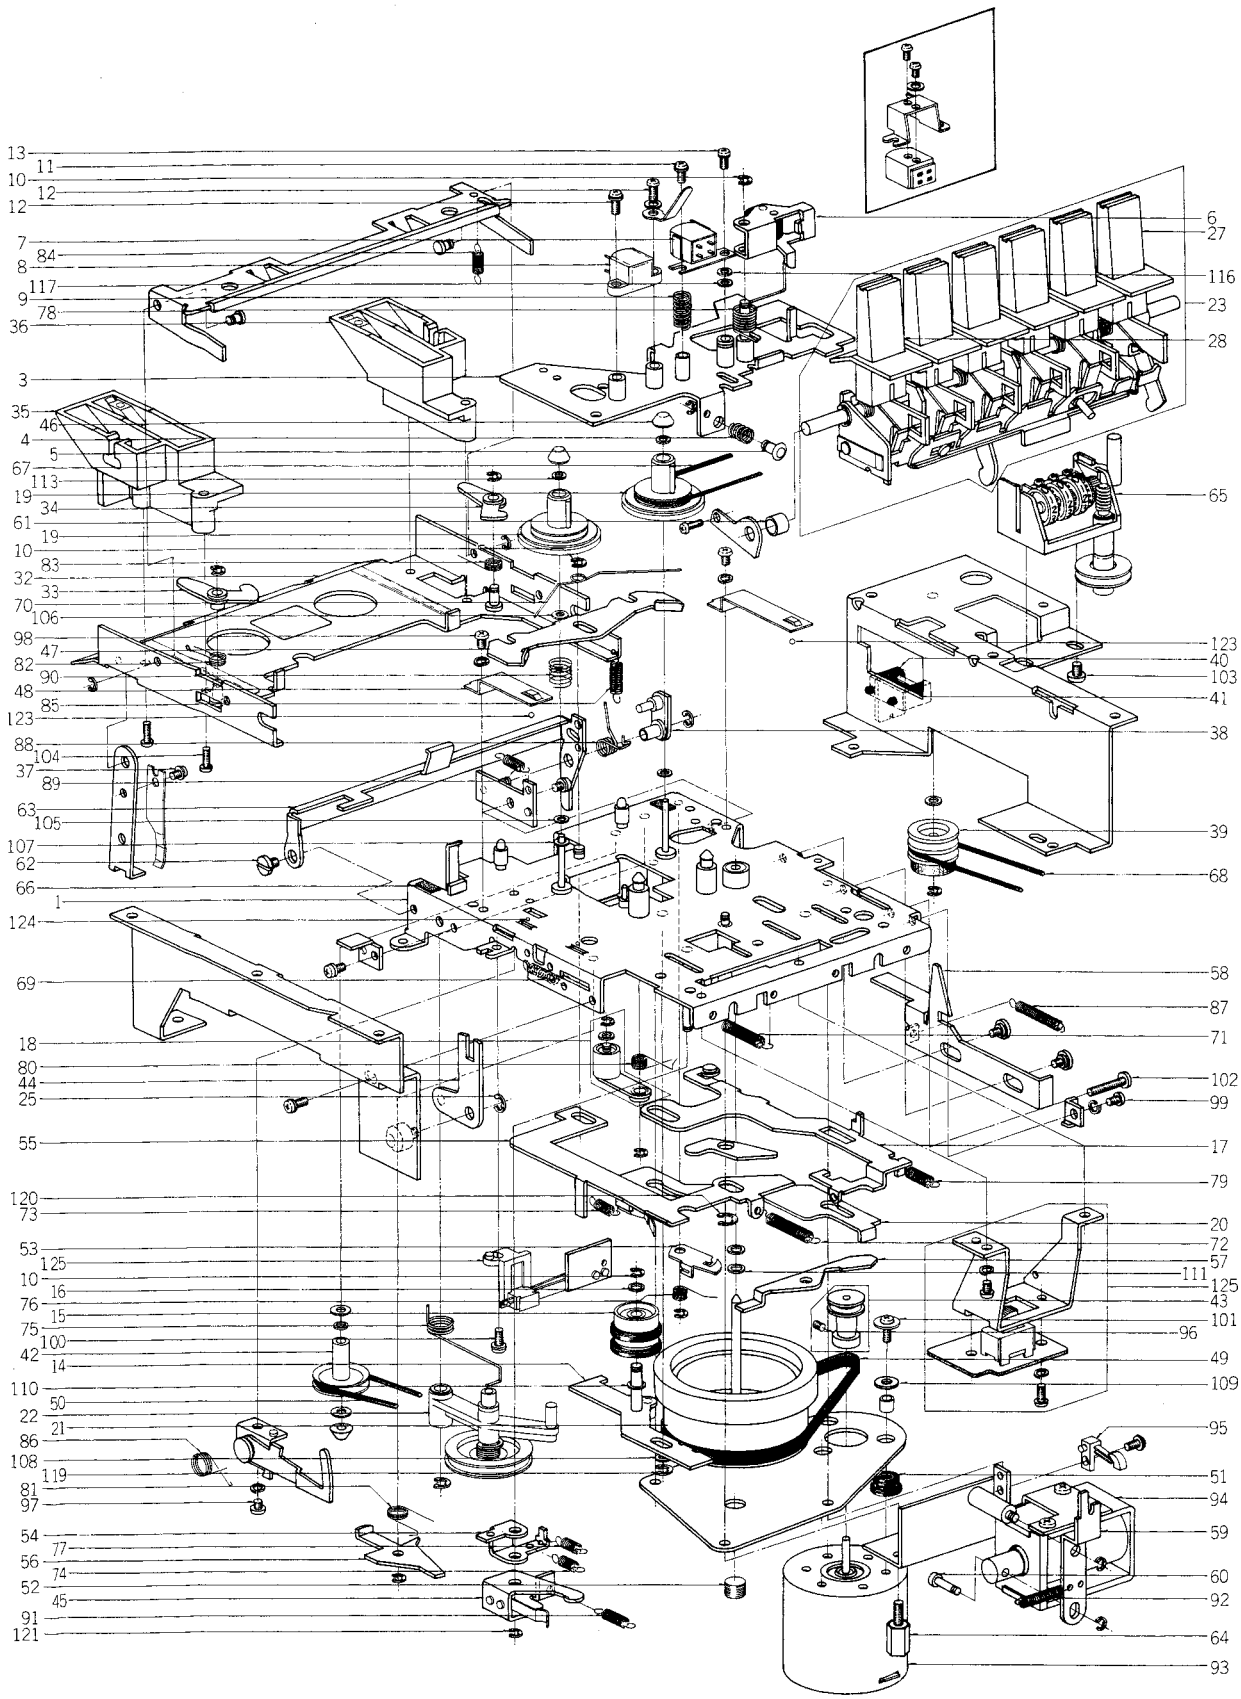

2) MECHA BLOCK

Ref. No.	Parts No.	Description	Schematic No.
2-1	BZ720955	Mecha Frame Comp. CS-705D	TA2-1387
2-2x	BH720966	Head Base Block Comp. CS-705D	TA3-1624
2-3	HZ723060	Head Base Comp. CS-707D	TA3-1425
2-4	ZG720988	Head Base Shaft Spring CS-705D	T4-10180
2-5	MS720990	Head Base Shaft CS-705D	T4-10436
2-6	BZ721001	Pinch Roller Arm Comp. CS-705D	TA4-13682
2-7	HP721045	REC/PB HEAD (HN-424549) CS-705D	T4-18244
2-8	HE721056	ERASE HEAD (168-36) CS-705D	T4-8807
2-9	ZG717827	Head Adjust Spring CT-5	T4-5067
2-10	ZW358018	'E' Ring 2M	6-1-9
2-11	ZS722081	Screw, pan head w/s. washer M2x5 CS-705D	Z4-5077
2-12	ZS608106	Screw, pan head 2x6	Z4-2365
2-13	ZS721091	Screw, pan head w/washer CS-705D	Z4-5551
2-14	BL721113	FR Lever Comp. CS-705D	TA4-7049
2-15	BZ721124	Idler A Comp. CS-705D	TA4-12545
2-16	ZW721135	Flat Washer M25x0.1 CS-705D	Z4-5137
2-17	BZ721146	Pause Function Lever Comp. CS-705D	TA4-12525
2-18	BZ721157	Idler B Comp. CS-705D	TA4-9511
2-19	BR700986	Supply, Take-up Reel Table Block Comp. CS-705D	TA4-7102
2-20	ML723082	FF Lever Comp. CS-707D	TA4-13659
2-21	BF701100	Flywheel w/shaft CS-705D	TA4-12528
2-22	BL720347	Tension Arm B Block Comp. CS-707D	TA4-13681
2-23	BK700301	Operation Button Block Comp.	TA2-1388
2-24x	BK740391	Operation Button Block Comp. (BL)	TA2-1537
2-25	ZW270101	'E' Ring 3M	6-1-9
2-26x	ZS460440	Screw, pan head 2x4	
2-27	SB721247	Operation Button A CS-705D	T3-1530
2-28	SB721258	Operation Button B (REC) CS-705D	T3-1531
2-29x	SB743467	Operation Button A CS-705D-BL	T3-1709
2-30x	SB743470	Operation Button B CS-705D-BL	T3-1310
2-31x	BZ700290	Cassette Holder Base Block Comp.	TA2-1389
2-32	BZ721260	Cassette Holder Base Comp. CS-705D	TA3-1330
2-33	BL721282	Stop Lever L Comp. CS-705D	TA4-11810
2-34	BL721293	Stop Lever R Comp. CS-705D	TA4-11813
2-35	BZ721348	Cassette Guide L Comp. (Lower) CS-705D	TA4-13183
2-36	BZ721350	Cassette Guide R Comp. (Lower) CS-705D	TA4-13184
2-37	ZS722092	Screw, pan head w/s. washer M2x4 CS-705D	Z4-5074
2-38	BL721405	Limiter Lever Comp. CS-705D	TA4-11820
2-39	BZ721440	Counter Idler Comp. CS-705D	TA4-13185
2-40	TC721473	SW. Installation Plate CS-705D	T4-11727
2-41	ES721484	Reed SW. (MAH-16) CS-705D	T4-8351
2-42	BZ721495	Idler Comp. CS-705D	TA4-12472
2-43	MR740390	Motor Pulley Part AC-3500/L/BL	TA4-12527
2-44	BL721517	Joint Lever Comp. CS-705D	TA4-13186
2-45	BL721528	Muting Lever Comp. CS-705D	TA4-13187
2-46	MT721530	Reel Shaft Cap CS-705D	T4-12471
2-47	ML721541	Brake Lever CS-705D	T4-6003
2-48	ZG721563	Head Base Holding Spring CS-705D	T4-7016
2-49	MB701111	Belt (Capstan) 62.25x5x0.4 CS-705D	T4-11840
2-50	MB701122	Belt (Take-up) 1x56.7 CS-705D	T4-11841
2-51	MB721607	Motor Installation Rubber CS-705D	T4-7840
2-52	ZS721620	Flywheel Adjust. Screw CS-705D	T4-7869
2-53	MZ721631	Pause Lock Plate CS-705D	T4-10218
2-54	ML721642	RWD Lever B CS-705D	T4-9314
2-55	ML721653	Brake Function Lever CS-705D	T3-702
2-56	ML740392	REC Lever B-6 AC-3500/L/BL	T4-14573
2-57	ML721675	FF Lever CS-705D	T4-10586
2-58	ML721686	Hook Lever CS-705D	T4-11844
2-59	ML721708	Shut Off Lever CS-705D	T4-11846
2-60	MS721710	Plunger Shaft CS-705D	T4-11847
2-61	TC721721	Spacer CS-705D	T4-11848
2-62	ZS721732	Graduated Screw M2.6 CS-705D	T4-11849
2-63	ML721743	Timing Lever CS-705D	T3-1334
2-64	ZS721765	Screw, hexagon head M2.6 CS-705D	T4-12082
2-65	MC701368	Counter CS-705D	T4-13188
2-66	MB721798	Rubber Cushion CS-705D	T4-12056
2-67	MB701370	Belt A (Counter) CS-705D	T4-13166
2-68	MB701381	Belt B (Counter) CS-705D	T4-13167
2-69	ZG721855	REC Safety Plate Spring CS-705D	T4-7147
2-70	ZG721866	Brake Lever Spring CS-705D	T4-5126
2-71	ZG721877	Head Base Spring CS-705D	T4-7076
2-72	ZG721888	Brake Function Lever Spring CS-705D	T4-7077
2-73	ZG721890	FF Lever Spring CS-705D	T4-7079
2-74	ZG721901	REW Lever Spring B CS-705D	T4-10401
2-75	ZG721912	Idler B Lever Spring CS-705D	T4-12624
2-76	ZG740393	Pause Lock Plate Spring AC-3500/L/BL	T4-14033
2-77	ZG721934	FR Lever Spring D CS-705D	T4-7846
2-78	ZG721102	Pinch Roller Spring CS-705D	T4-10359
2-79	ZG721945	Pause Function Lever Spring CS-705D	T4-10360
2-80	ZG721956	Idler B Lever Spring CS-705D	T4-7853
2-81	ZG721967	REC Lever Spring B CS-705D	T4-7082
2-82	ZG721361	Stop Lever Spring L CS-705D	T4-11816
2-83	ZG721372	Stop Lever Spring R CS-705D	T4-11817
2-84	ZG721383	Cassette Detector Arm Spring CS-705D	T4-11818
2-85	ZG721978	Cassette Up Spring CS-705D	T4-11855
2-86	ZG721980	Safety Lever Spring CS—705D	T4-11856
2-87	ZG723115	Hook Lever Spring CS-707D	T4-13653
2-88	ZG722002	Limiter Lever Spring CS-705D	T4-11858
2-89	ZG722013	Timing Lever Spring CS-705D	T4-13320
2-90	ZG722024	Back Tension Spring CS-705D	T4-5733
2-91	ZG722035	Muting Lever Spring CS-705D	T4-13319
2-92	ZG740394	Shut-off Lever Spring AC-3500/L/BL	T4-15003
2-93	BM701335	Motor Block Comp. MHI-5R2CHA CS-705D	T4-8918
2-94	EP740395	Plunger P-14W AC-3500/L/BL	T4-18147
2-95	ES722070	Leaf SW. H-7160 CS-705D	T4-8765
2-96	ZS521943	Set Screw, hesagon socket 2x3 (CUP/P.)	Z4-2372
2-97	ZS722103	Screw, pan head M2.6x3 CS-705D	Z4-2400
2-98	ZS608185	Screw, pan head 2.6x4	Z4-2366
2-99	ZS722114	Screw, pan head w/s. washer M2.6x4 CS-705D	Z4-5061
2-100	ZS722125	Screw, pan head w/s. washer M2.6x6 CS-705D	Z4-5063
2-101	ZS740396	Screw, pan head M2.6x7 w/s. washer	Z4-5069
2-102	ZS722136	Screw, binding head M2.6x14 CS-705D	Z4-5735
2-103	ZS323728	Screw, binding head 3x5	Z4-2375
2-104	ZS721394	Tapping Screw, pan head #2 M2x6 CS-705D	Z4-5054
2-105	ZW740397	Washer M1.6x6x0.2 (Teflon)	Z4-5843
2-106	ZW740398	Washer M6.2x9.5x0.15 (Lumilar)	Z4-5844
2-107	ZW722171	Wahser (Lumilar) M1.8x3x0.2 CS-705D	Z4-5194
2-108	ZW722182	Flat Washer M4x0.8 CS-705D	Z4-5114

Ref. No.	Parts No.	Description	Schematic No.
2-109	ZW722193	Flat Washer M2.6x0.5 CS-705D	Z4-5111
2-110	ZW722204	Washer (Teflon) CS-705D	Z4-5117
2-111	ZW722215	Flat Washer M2.5x0.25 CS-705D	Z4-5128
2-112x	ZW721135	Flat Washer M25x0.1 CS-705D	Z4-5137
2-113	ZW721181	Ply slider Washer M1.6x0.25 CS-705D	Z4-5141
2-114x	ZW740399	Washer D2.5x5x0.25 (Polyslider)	Z4-5166
2-115x	ZW700380	Spring Washer M2.6	
2-116	ZW740400	Washer M2.5x0.2	Z4-5190
2-117	MH740401	Head Adjust. Spacer	T4-11562
2-118	ZW356657	'E' Ring 1.5M	6-1-9
2-119	ZW270112	'E' Ring 3.2	6-1-9
2-120	ZW623283	'E' Ring 4M	6-1-13
2-121	ZW410051	'E' Ring 2.5	6-1-9
2-122	MV357208	Steel Ball D2	
2-123	MV666887	Steel Ball D2.5	
2-124	BA722496	Mute P.C Board Comp. CS-705D	TA4-8937
2-125	ES740342	Leaf SW.	T4-18346

3. TONE CONTROL & REC/PB P.C BOARD (AC–3501A) BLOCK

Symbol No.	Parts No.	Description	Schematic No.	Q'ty
3-1	BA290632	Tone Control & Rec/PB P.C Board Comp. AC-3500		1
3-IC1	EI605013	IC NE545B	45-8-117	2
3-TR1to3	ET223446	Transistor 2SC1571NP(G)(H)	45-1-238	6
3-TR4,5	ET639437	Transistor 2SC945L(Q)(P)	45-1-85	4
3-TR6,7	ET223446	Transistor 2SC1571NP(G)(H)	45-1-238	4
3-D1to3	ED562386	Germanium Diode 1S188AM	45-3-24	6
3-L1	EO299384	Inductor RX-9P 472k	23-1-275	2
3-L2	EO299373	Inductor RX-9P 22MH(K)	23-1-275	2
3-FL1	ER669734	MPX Filter FB1801M	53-1-104	2
3-J1,2	EJ299283	Mic. Jack HLJ273-1-080	31-2-82	2
3-SW1,2	ES299327	Push SW. JP7134	25-5-248	1
3-SW3	ES299362	Slide SW. CL212E	25-3-134	1
3-SW4,5	ES299294	Push SW. JP-7135	25-5-249	1
3-VR1	EV522797	Semi-fixed/Vol. V8K4-1 20 kB	36-10-266	2
3-VR2	EV299338	Double axial 2 throw Vol. V24L5DGPHN 15A 50kx2	36-3-80	1
3-VR3,4	EV520806	Semi-fixed/Vol. V8K4-1 10 kB	36-10-266	4
3-VR5	EV299351	Double axial 2 throw Vol. V24L5DGPHN 3B 250kx2	36-3-79	1
3-VR6,7	EV299340	Single axial 2 throw Vol. V16L4PHN 100 kBx2	36-22-25	2
3-2	ZS379350	Screw, pan head 3x6		4
	Capacitor, Vertical Type			
3-C1	EC676721	Styrol 470PF(K) 50WV	24-11-11	2
3-C12	EC621257	Solid Aluminum 0.47μF(M) 25WV	24-19-2	2
3-C15	EC638177	Solid Aluminum 1μF(M) 25WV	24-19-2	2
3-C20	EC604440	Solid Aluminum 0.33μF(M) 25WV	24-19-2	2
3-C21	EC523282	Solid Aluminum 0.1μF(M) 25WV	24-19-2	2
3-C27	EC523282	Solid Aluminum 0.1μF(M) 25WV	24-19-2	2
3-C38	EC621257	Solid Aluminum 0.47μF(M) 25WV	24-19-2	2

4. MULTI FUNCTION P.C BOARD (AC–3502) BLOCK

Symbol No.	Parts No.	Description	Schematic No.	Q'ty
4-1	BA290452	Multi Function P.C Board Comp. AC-3500		1
4-2	BA290316	Multi Function P.C Board Comp. AC-3500L		1
4-IC1	EI697871	IC LA-3122	45-8-185	1
4-IC2	EI299441	IC TA7303P	45-8-216	1
4-IC3	EI299452	IC HA1196	45-8-217	1
4-IC4	EI299700	IC HA1197	45-8-218	1
4-TR1	ET618873	Transistor 2SC930(E)(F)	45-1-185	1
4-D1	ED624903	Silicon Diode 1S2473	45-3-28	1
4-L1,2	EO650428	Inductor 146LY 39μH(J)	23-1-214	2
4-L3	EO539820	Peaking Coil 2.2μH(K)	23-1-187	1
4-T1	BT299575	FM-IF Trans. 154AC-41345Z	23-1-274	1
4-T2	EO299665	OSC Coil MW RWR-42282N	23-4-41	1
4-T3	BT697950	AM-IF Trans. CFU-085-D	23-1-241	1
4-T4	BT293398	AM-IF Trans. 10EZ RMC-42246BCH 46	23-1-276	1
4-T5	EO299564	OSC. Coil LW RWR-43115N	23-4-42	1
4-FL1,2	ER650430	Ceramic Filter SFE-10.7 MA-8-Z	53-1-102	2
4-TC1,2	EC675742	Trimmer/C. CTY-21D 15PV	24-2-35	2
4-J1	EJ223457	2P Pin Jack JPJ355	31-1-167	1
4-J2	EJ283094	4P Pin Jack 1-01-0107-00	31-5-137	1
4-SW1	ES299428	Rotary SW. SR26N 3-8-4	25-6-107	1
4-SW1	ES299430	Rotary SW. SR26N 4-13-5 (AC-3500L)	25-6-108	1
4-VR1	EV572433	Semi-fixed/Vol. V8K4-1 500 kB	36-10-266	1
4-VR2	EV520806	Semi-fixed/Vol. V8K4-1 10 kB	36-10-266	1
4-3	ZS325495	Tapping Screw #2, 3x6 (BR)		2
	Capacitor, Vertical Type			
4-C32	EC299518	Styrol 360PF(K) 50WV	24-11-3	1
4-C34	EC638177	Solid Aluminum 1μF(M)25WV	24-19-2	1
4-C41	EC522167	Solid Aluminum 0.22μF(M) 25WV	24-19-2	1
4-C50	EC650406	Styrol/C. 310PF(J) 50WV	24-11-3	1
4-C62	EC523282	Solid Aluminum 0.1μF(M) 25WV	24-19-2	1
4-C62	EC298800	Solid Aluminum 0.1μF(M) 16WV (AC-3500L)	24-19-2	1

5. POWER, SYS. CON & OSC P.C BOARD (AC–3503) BLOCK

Symbol No.	Parts No.	Description	Schematic No.	Q'ty
5-1	BA290755	Power, Sys. Con & Osc P.C Board Comp.	AC-3565	1
5-2	BA290204	Power, Sys. Con & Osc P.C Board Comp. (CSA)	AC-3565	1
5-3	BA304120	Power, Sys. Con & Osc P.C Board Comp. (CEE)	AC-3565	1
5-TR1	ET649034	Transistor 2SC1449(K)(L)	45-1-214	1
5-TR2	ET639437	Transistor 2SC945L(Q)(P)	45-1-85	1
5-TR3	ET452531	Transistor 2SD313(E)(F)	45-1-105	1
5-TR4	ET554657	Transistor 2SA733(P)(Q)	45-1-124	1
5-TR5,6	ET639437	Transistor 2SC945L(Q)(P)	45-1-85	2
5-TR7	ET299531	Transistor 2SB544MP(E)(F)	45-1-258	1
5-TR8	ET299507	Transistor 2SD400MP(E)(F)	45-1-259	1
5-D1to4	ED245417	Silicon Diode GP20G	45-2-70	4
5-D5to10	ED224526	Silicon Diode 10D1	45-2-11	6
5-D11	ED290722	Zener Diode RD-16E(C)	45-6-72	1
5-D11	ED300269	Zener Diode RD-9-1E(B) (CSA, CEE)	45-6-72	1
5-D12	ED560913	Silicon Diode 1S2473VE	45-3-23	1
5-D14	ED300269	Zener Diode RD-9-1E(B) (CSA, CEE)	45-6-72	1
5-D15,16	ED224526	Silicon Diode 10D1 (CEE)	45-2-11	2
5-VR1,2	EV464231	Semi-fixed/Vol. V8K4-1 100 kB	36-10-266	2
5-T1	EO290744	Osc. Coil 13Y-033-1639	23-4-43	1
5-4	ZS325495	Tapping Screw #2, 3x6 (BR)		1
5-R4	ER300744	Cement/R. (Wire-wound Type) 2W 68 ohms (J) (U/T, CSA)	35-16-57	1
		Capacitor		
5-C1to6	EC204671	Ceramic DD31-6 0.01μF(P) 500WV	24-5-66	6
5-C7,8	EC300742	Elect. (Vert. Type) 4700μF 35WV	24-10-116	2
5-C10	EC220421	Elect. (Vert. Type) 1000μF 16WV	24-12-9	1
5-C21	EC520773	Styrol (Tub. Type) 2000PF(J) 250WV	24-11-10	1
5-C26,27	EC684720	Ceramic CLD16VE 0.01μF(P) 500WV (CSA)	24-5-61	2

6. MAIN AMP P.C BOARD (AC–3504) BLOCK

Symbol No.	Parts No.	Description	Schematic No.	Q'ty
6-1	BA290373	Main Amp P.C Board Comp.	AC-3563 A/B	1
6-2	BA290261	Main Amp P.C Board Comp. (CSA)	AC-3563 A/B	1
6-3	BA290272	Main Amp P.C Board Comp. (CEE)	AC-3563/A/B	1
6-IC1	EI299608	IC STK-078	45-8-219	2
6-L1	EO650823	Phase Compensation Coil 2.2μH(K)	23-1-239	2
6-4	ZS462802	Tapping Screw #2, 3x15(BR) (BR)		4
6-5	ZS325495	Tapping Screw #2, 3x6(BR) (BR)		6
6-C2	EC516767	Styrol/C. (Vert. Type) 470PF(K) 50WV	24-11-3	2

7. ILLUSTRATION OF ASSEMBLY BLOCK

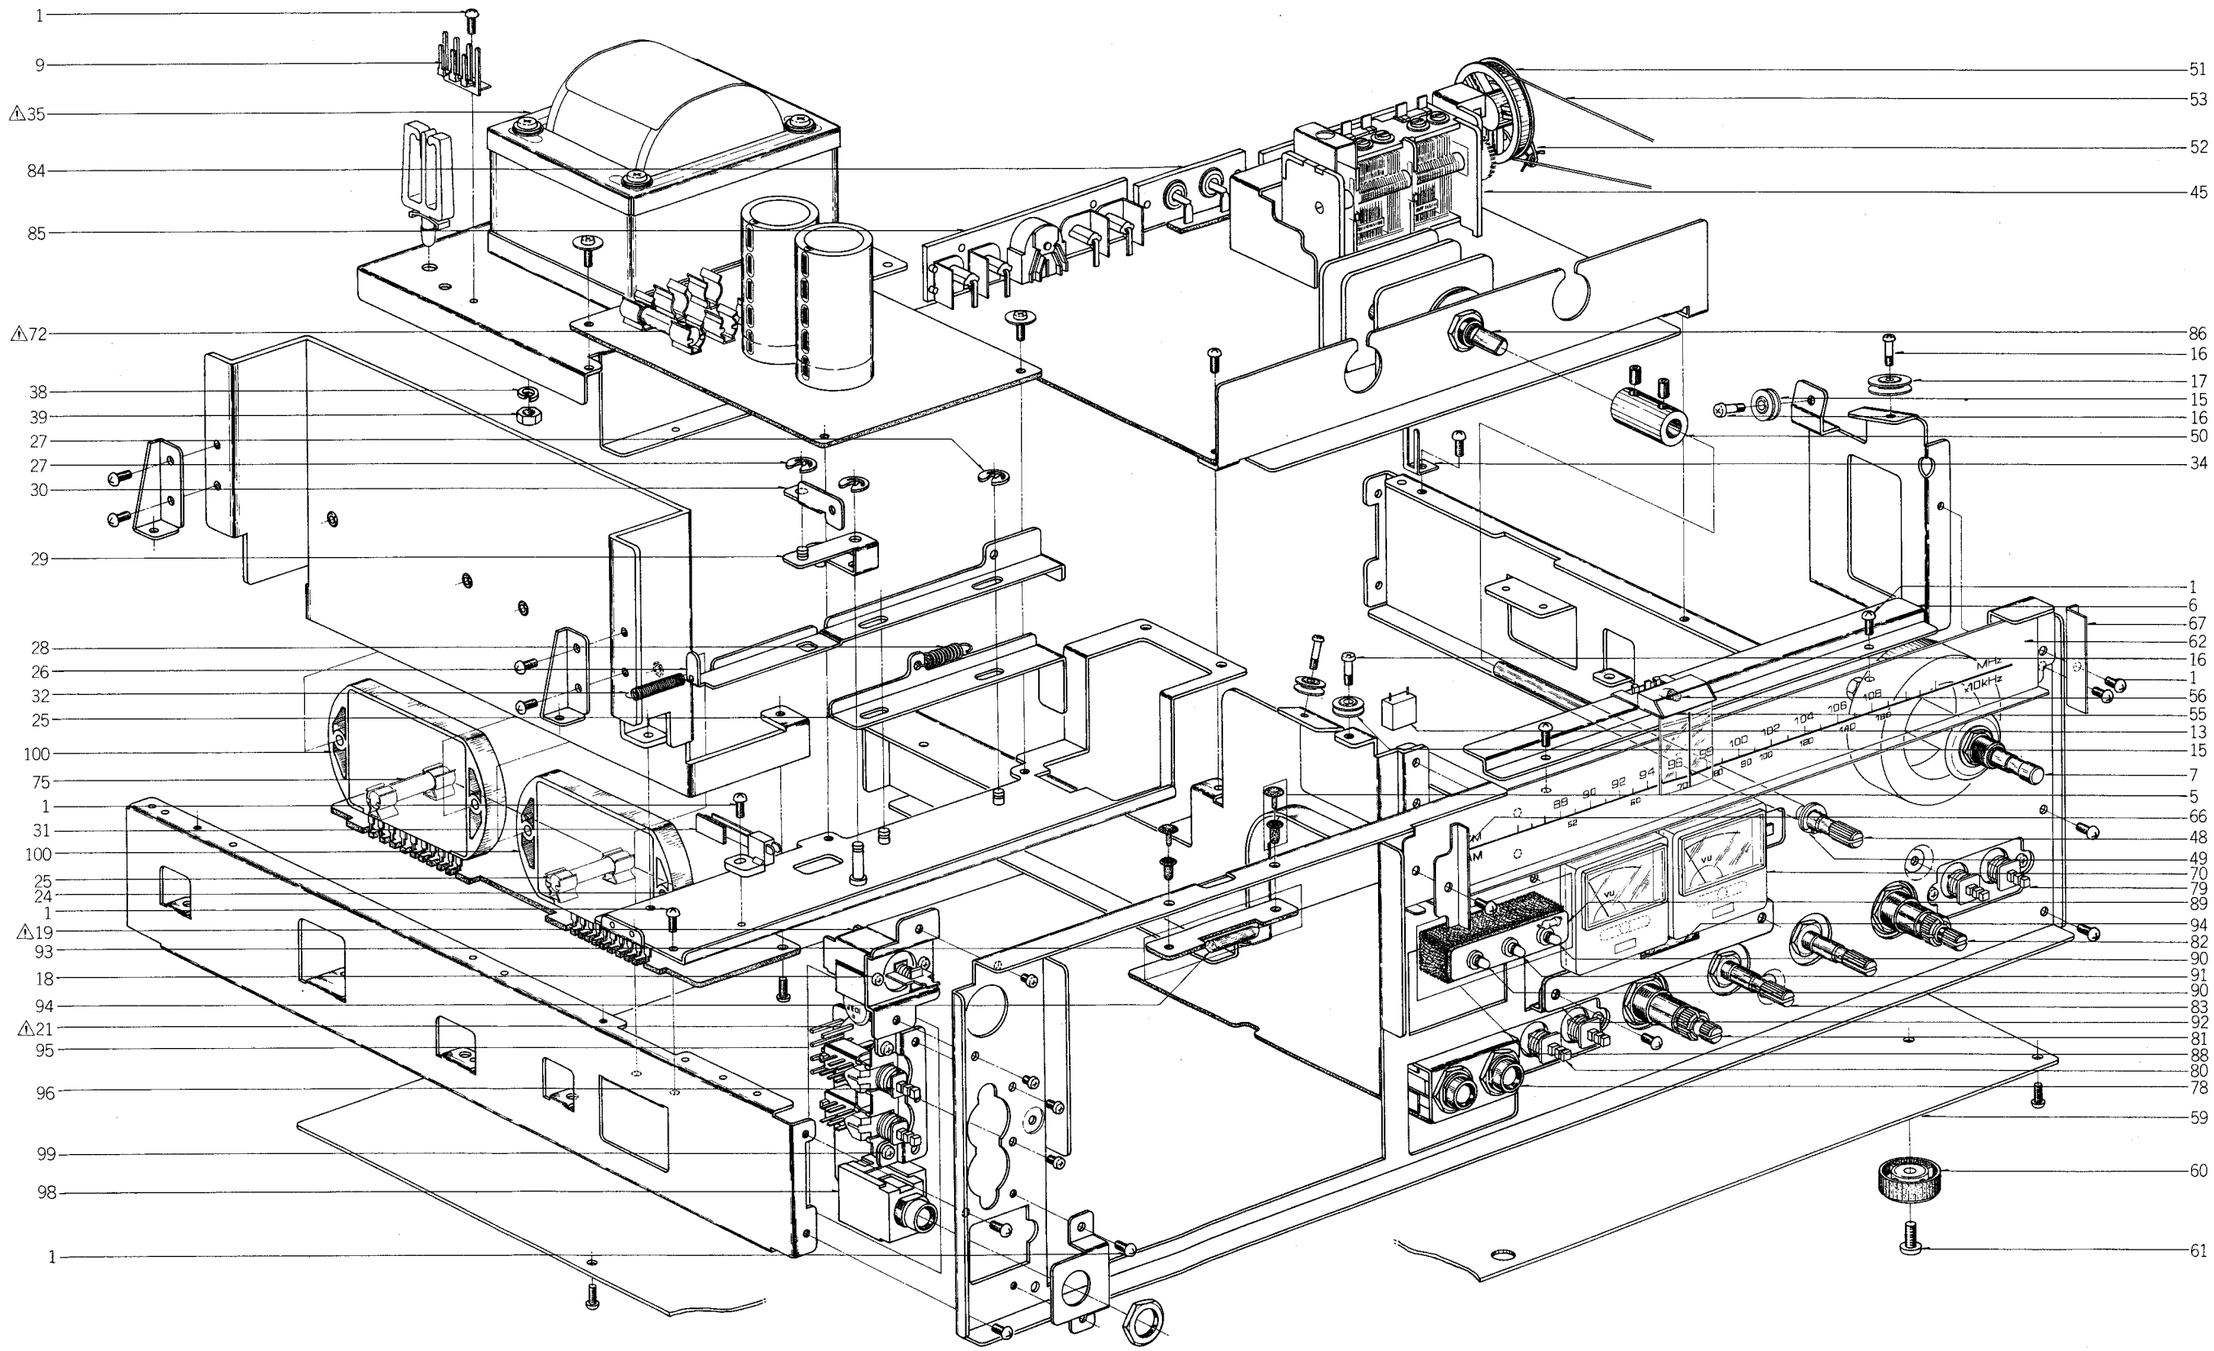

7. ASSEMBLY BLOCK

Ref. No.	Parts No.	Description	Schematic No.	Q'ty
	ASSEMBLY BLOCK			
7-1	ZS325495	Tapping Screw #2, 3x6(BR)		45
7-2x	ZS447761	Tapping Screw #2, 3x6 (BR) (BLACK)		8
7-3x	ZS300425	Screw, pan head 3x6 w/s. washer		7
7-4x	ZS379350	Screw, pan head 3x6		7
7-5	ZW698308	Nylon Rivet (FNPR) 3x5.5 Black	2-7-54	5
7-6	TA286626	Rail	AC-3520	1
7-7	MI300419	Tuning Wheel	13-2-26	1
7-8x	ZW270088	'E' Ring 1.9M	6-1-9	1
7-9	EJ551035	Wrapping Terminal, 4P T5251	32-1-36	1
7-10x	ZS434250	Screw, pan head 4x8, w/washer (CEE, BEAB)		1
7-11x	ZW413188	Nut M4, #1 (CEE, BEAB)		1
7-12x	ZW273881	Earth Lug (CEE, BEAB)		1
7-13	EO263068	Inductor 144LZ 2.2μH(K)	23-1-240	1
7-14x	ED224526	Silicon Diode 10D1	45-2-11	1
7-15	MR530662	Roller B	91-5009	3
7-16	ZS530673	Roller Screw A	91-5010	4
7-17	MR530651	Roller A	91-5008	1
7-18	ZS417216	Screw, pan head 3x4		2
7-19	ES224436	⚠ Push SW. JP-1	25-5-221	1
7-20x	ES242346	⚠ Push SW. JP17 (CEE, BEAB)	25-5-224	1
7-21	EC684720	⚠ Ceramic/C. CLD16YE 0.01μF(P) 500WV	24-5-61	1
7-22x	EC294118	⚠ Ceramic/C. DPN6600 YM 0.01μF(P)125WV (CSA)	24-5-70	1
7-23x	EC301320	⚠ MP/C. PME271Y447 4700PF 250WV	24-9-118	2
7-24	ML290924	Rec Lever Stopper Plate Part AC-3500	AC-3521	1
7-25	ML286457	Lever (3)	AC-3524	1
7-26	ML286604	Lever (4)	AC-3525	1
7-27	ZW290283	'U' Ring 2.85M	6-1-1	4
7-28	ZG300739	Rec Lever Spring	AC-3561	1
7-29	ML290902	Lever (2) Part AC-3500		1
7-30	ML286470	Lever (1)	AC-3522	1
7-31	ES592964	Leaf SW. BSW-1F TX	25-10-18	1
7-32	ZG514697	Head Return Spring (Old)	CG-1308	1
7-33x	ZG431897	Slide SW. Return Spring (New)	ED-B112	1
7-34	EJ539447	Earth Terminal 2P T4460	32-1-32	1
	FINAL ASSEMBLY BLOCK			
7-35	BT698804	⚠ Power Trans. AC-3000T-1	38-4-489	1
7-36x	BT294120	⚠ Power Trans. AT-3000T-2 (CSA)	38-4-490	1
7-37x	BT294131	⚠ Power Trans. AC-3000T-3 (CEE, BEAB)	38-4-491	1
7-38	ZW273914	Spring Washer		4
7-39	ZW273960	Nut M4		4
7-40x	ZS516205	Tapping Screw #2, 3x8(BR) w/washer		1
7-41x	ZS302024	Tapping Screw #2, 3x8(Pan) W=10		4
7-42x	ZW698940	Nylon Rivet (FNRP) 4x6 (Black)	2-7-58	2
7-43x	EJ254970	Lug Plate KP1L1 (CEE,BEAB)	33-3-3	1
7-44x	ER300744	Cement/R. (Wire-wound Type) 2W 68 ohms (J) (CEE,BEAB)	35-16-57	1
7-45	EE655301	Front End FB512U14	57-2-35	1
7-46x	EE301419	Front End FB513U12 (CEE, BEAB)	57-2-44	1
7-47	MS186413	Relay Shaft	AC-3539	1
7-48	ZW312693	'E' Ring 4M	6-1-4	2
7-49	ZW322110	Washer (Nylon) D6.1x10.3x1.0t		1
7-50	TC300422	Joint	AC-3556	1
7-51	TA300423	Dial Wheel	2-15-16	1
7-52	ZS300421	Dial Wheel Spring	AC-3551	1
7-53	TA207347	Thread D0.5 1.6m		1
7-54x	ZS421806	Screw, pan head 3x8		2
7-55	TA300418	Pointer Part-G	AC-3557	1
7-56	EL698793	Lamp (Cord Type) 6V 65mA (400M/M)	28-2-61	1
7-57x	ZS447840	Tapping screw #2, 3x8 (BR)		5
7-58x	ZW659193	Adjust. Washer (U) D4.5x10x0.5t		2
7-59	SP286727	Bottom Plate	AC-3531	1
7-60	SA301770	Tran Leg (J)	2-6-18	4
7-61	ZS565942	Tapping Screw #2, 4x8 (Pan)		4
7-62	TA286672	Scale Plate	AC-3512	1
7-63x	TA301139	Scale Plate (B) (3500L)	AC-3512	1
7-64x	TA302001	Scale Plate (A-BL)	AC-3512	1
7-65x	TA302002	Scale Plate (B-BL)	AC-3512	1
7-66	TA286525	Plate (L), Dummy	AC-3513	1
7-67	TA286536	Plate (R), Dummy	AC-3514	1
7-68x	TA301310	Plate (L-BL), Dummy	AC-3513	1
7-69x	TA301311	Plate (R-BL), Dummy	AC-3514	1
7-70	EM698815	VU Meter MG-20	46-1-162	2
7-71x	EM301306	VU Meter KL-218D-106	46-1-173	2
7-72	EF590692	⚠ Fuse 1.2A 250V	39-1-50	1
7-73x	EF563703	⚠ Fuse 2A 250V (CSA)	39-1-50	1
7-74x	ER563681	⚠ Fuse 1A 250V (CSA)	39-1-50	2
7-75	EF563657	Fuse 3A 250V	39-1-50	2
7-76x	EF623103	⚠ Fuse (SEMKO T Type) 1AT (CEE, BEAB)	39-1-53	3
7-77x	EF300580	Fuse (EAK) 2.5AT	39-1-59	2
	TONE CONTROL P.C BOARD BLOCK			
7-78	EJ299283	Mic. Jack HLJ273-1-080	31-2-82	2
7-79	ES299327	Push SW. JP-7134	25-5-248	1
7-80	ES299294	Push SW. JP-7135	25-5-249	1
7-81	EV299338	Double axial 2 throw Vol. V24L50DGPHN 15A 50kx2	36-3-80	1
7-82	EV299351	Double axial 2 throw Vol. V24L5DGPHN 3B 250kx2	36-3-79	1
7-83	EV299340	Single axial 2 throw Vol. V16L4PHN 100 kBx2	36-22-25	2
	MULTI FUNCTION P.C BOARD BLOCK			
7-84	EJ223457	2P Pin Jack JPJ355	31-1-167	1
7-85	EJ283094	4P Pin Jack 1-01-0107-00	31-5-137	1
7-86	ES299428	Rotary SW. SR26N 3-8-4	25-6-107	1
7-87x	ES299430	Rotary SW. SR26N 4-13-5 (3500L)	25-6-108	1
	LED P.C BOARD (AC-3501B) BLOCK			
7-88	BA290643	LED P.C Board Comp. AC-3500	AC-3568	1
7-89	EA286334	LED P.C Board	AC-3501B	1
7-90	ED698826	LED SR-105D	45-15-16	2
7-91	ED283138	LED GL-3PGI	45-15-15	1
	LAMP P.C BOARD (AC-3501C/D) BLOCK			
7-92	BA291115	Lamp P.C Board Comp. AC-3500(A)	AC-3573	1
7-93	BA290935	Lamp P.C Board Comp. AC-3500(B)	AC-3574	1
7-94	EL283184	Lamp (L/T)	28-2-59	2
	HEADPHONE P.C BOARD (AC-3501E) BLOCK			
7-95	BA290654	Headphone P.C Board Comp. AC-3500	AC-3580	1
7-96	ES698927	Push SW. JP-7136	25-5-250	1
7-97x	ER246363	Metal Oxide Film/R. 2W 220 ohms (K)	35-15-18	2
7-98	EJ225022	Headphone Jack LJ255-1-12	31-2-77	1
7-99	ZS417216	Screw, pan head 3x4		2
7-100	EI299608	IC STK-078	45-8-219	2
7-101x	EF602550	⚠ Fuse (SEMKO T Type) 1.25AT 250V (CEE, BEAB)	39-1-53	4

8. ILLUSTRATION OF REAR PANEL BLOCK

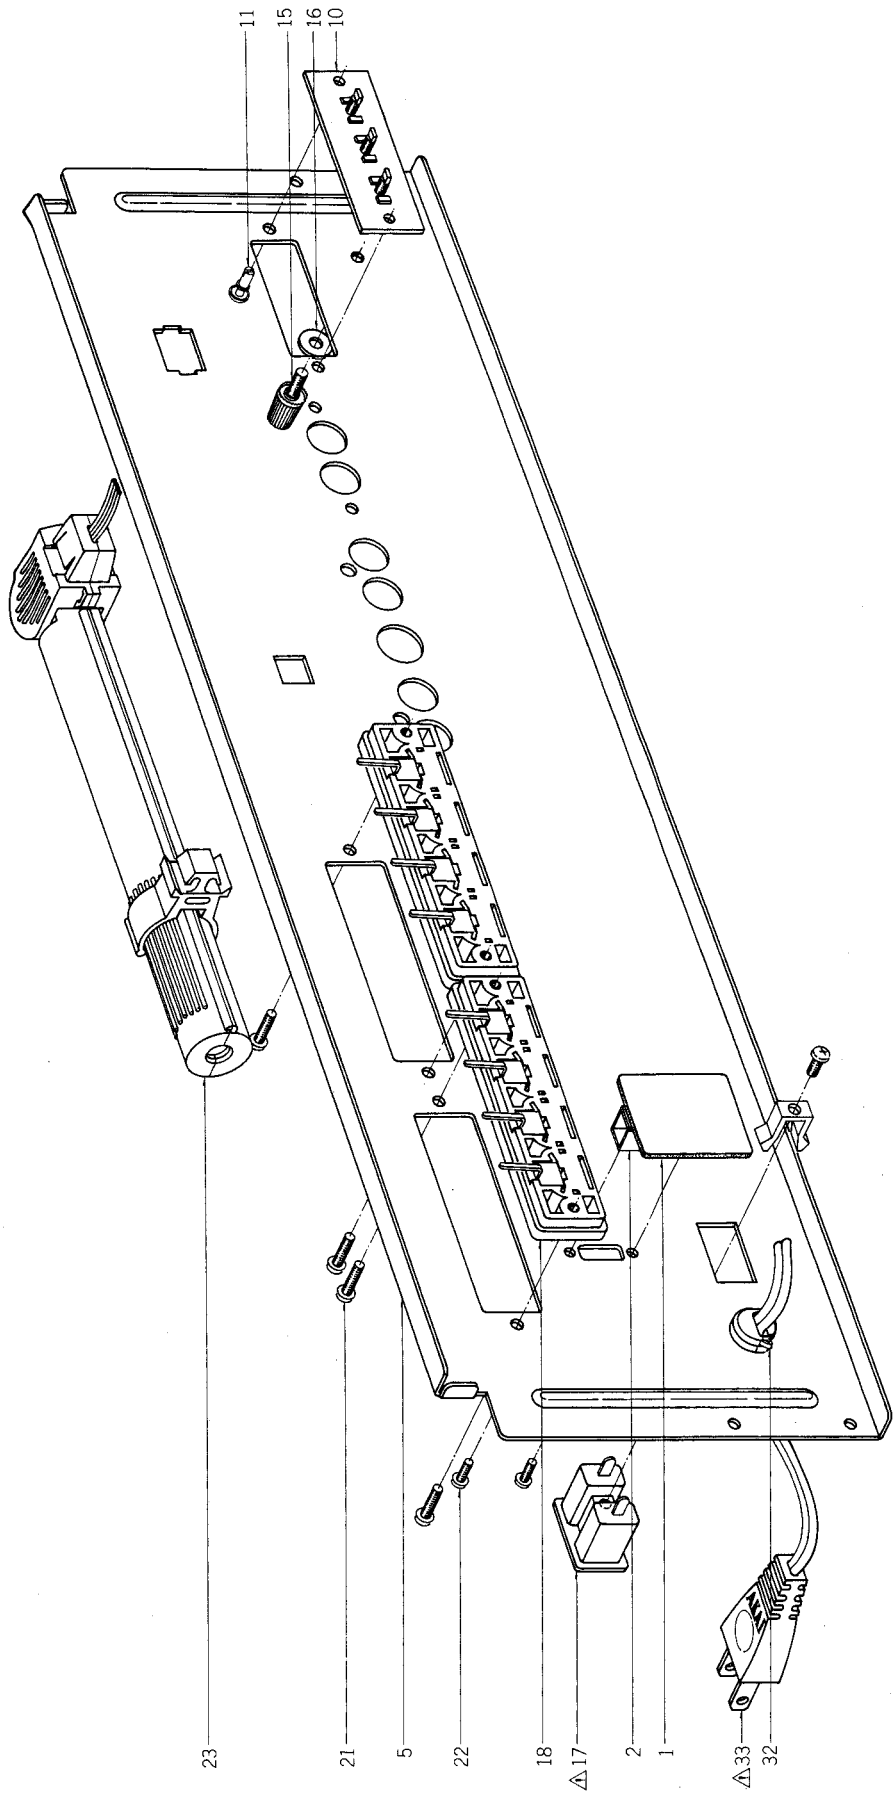

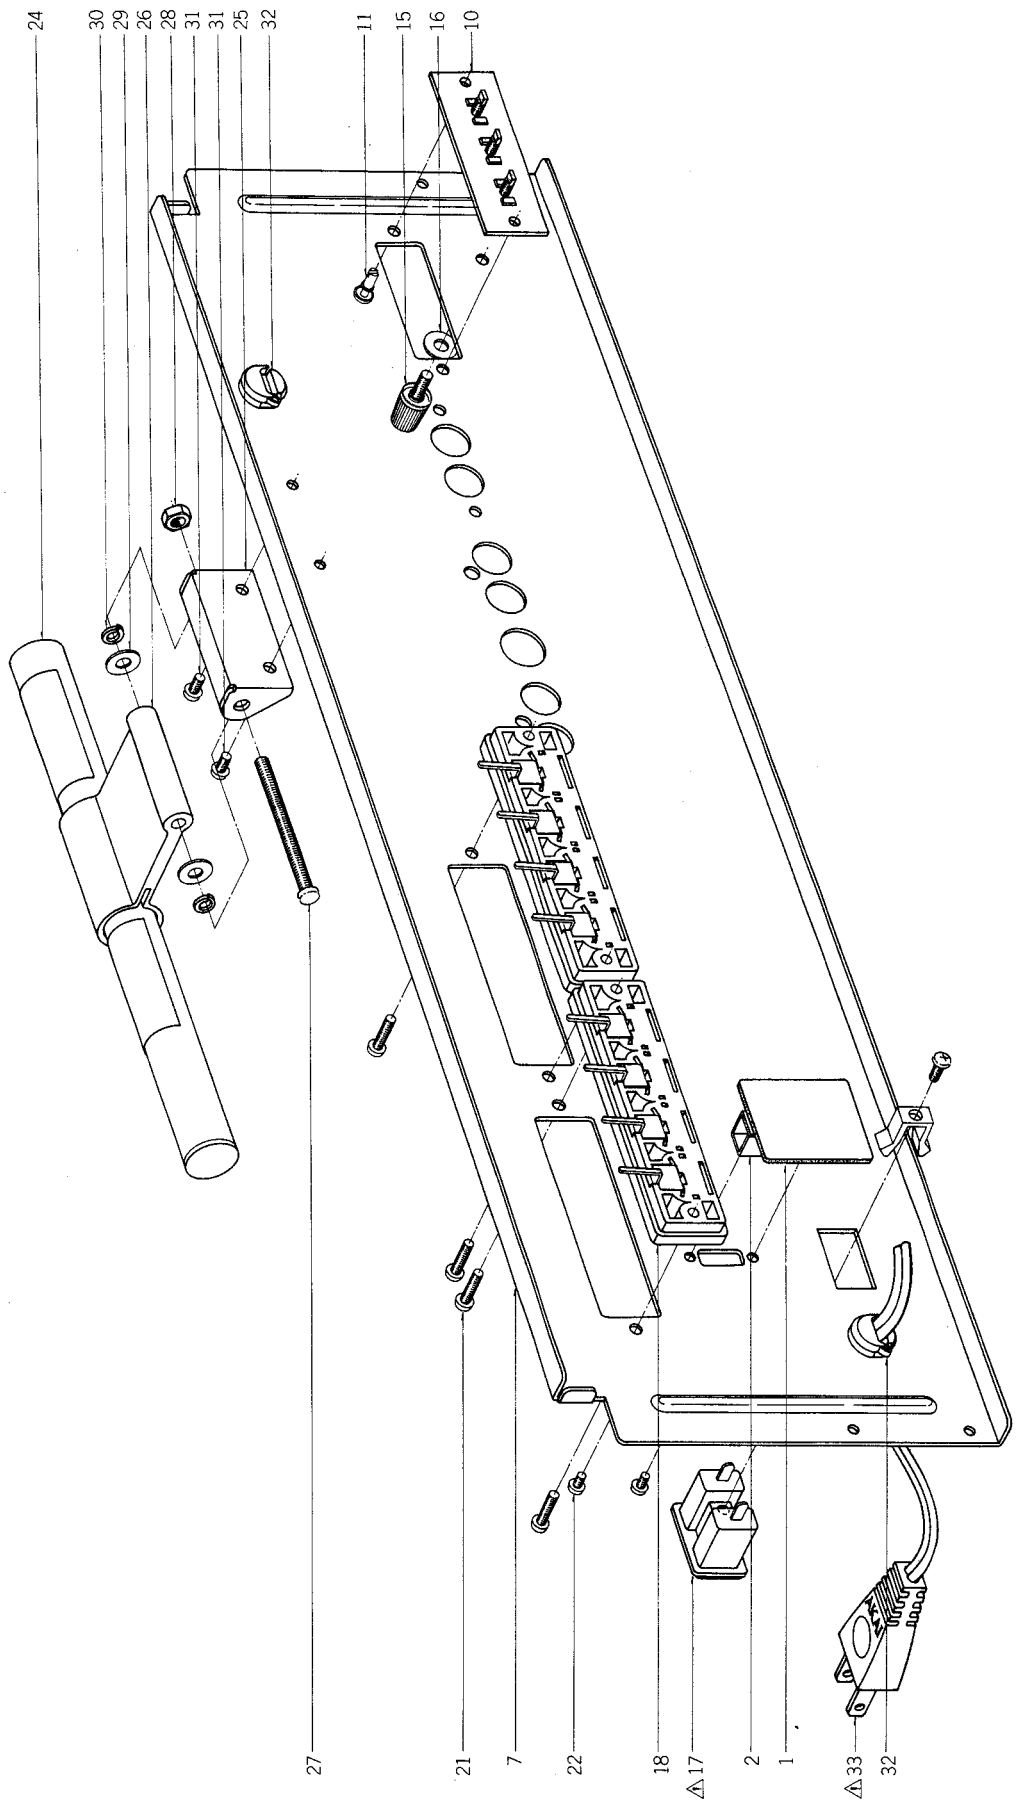
24
30
29
26
28
31
31
25
32
11
15
16
10
27
21
7
22
18
⚠17
2
1
⚠33
32

8) REAR PANEL BLOCK

Ref. No.	Parts No.	Description	Schematic No.	Q'ty
		BEAT SW. P.C BOARD (AC-3501F) BLOCK		
8-1	BA298618	Beat SW. P.C Board Comp. AC-3500	AC-3567	1
8-2	ES246227	Slide SW. SSC323E	25-3-119	1
8-3x	EC299553	Styrol/C. (Tub. Type) 220PF (K) 250WV	24-11-10	1
8-4x	EC298563	Styrol/C. (Tub. Type) 470PF (K) 250WV	24-11-10	1
		REAR PANEL BLOCK		
8-5	SP286773	Rear Panel (1)	AC-3508/3509	1
8-6x	SP286784	Rear Panel (2) (CSA)	AC-3509	1
8-7	SP287357	Rear Panel (1) (L-U/T)	AC-3511/3546	1
8-8x	SP287346	Rear Panel (2) (L-CEE)	AC-3546	1
8-9x	SP287335	Rear Panel (3) (L-BEAB)	AC-3547	1
8-10	EJ299610	3P Antenna Terminal Plate	32-1-78	1
8-11	ZW698308	Nylon Rivet (FNPR) 3x5.5 Black	2-7-54	2
8-12x	ZS355522	Screw, pan head 3x6 (CEE, BEAB)		2
8-13x	ZW273767	Earth Lug D3x20L (CEE, BEAB)		1
8-14x	ZS417216	Screw, pan head 3x4 (CEE, BEAB)		1
8-15	SK652397	Knob 0512-2	34-1-4	1
8-16	ZW652408	Washer (SPC) D3.2x10x0.5t		1
8-17	EJ298596	⚠ AC Concent UL	31-1-196	1
8-18	EJ240581	4P Push Terminal	32-1-72	2
8-19x	EJ296853	⚠ 3P In-Let CM-3 (CEE, BEAB)	31-1-199	1
8-20x	ZS463353	Tapping Screw #2, 3x8 (BR) (CEE, BEAB)		2
8-21	ZS522865	Tapping Screw #2 3x12 (BR)		4
8-22	ZS608185	Screw, pan head 2.6x4		2
8-23	EE299621	Bar Antenna	55-1-49	1
8-24	EE298337	Bar Antenna	55-1-50	1
8-25	TA530910	Antenna Channel	91-5029	1
8-26	TA625847	Antenna Holder	2-7-46	1
8-27	ZS552600	Screw, pan head 4x50		1
8-28	ZW604416	Nut M4		1
8-29	ZW420682	Washer (Nylon) D4.2x9x0.5t		2
8-30	ZW273914	Spring Washer		2
8-31	ZS447761	Tapping Screw #2 3x6 (BR) (Black) (L)		2
8-32	EZ631945	Strain Relief SR-4N-4	2-7-49	2
8-33	EW540123	⚠ AC Cord (CUL) 2.5M	26-3-20	1
8-34x	EW207742	⚠ AC Cord (CUL) (CSA)	26-3-45	1

9. PHOTO OF FINAL ASSEMBLY BLOCK

9) FINAL ASSEMBLY BLOCK

Ref. No.	Parts No.	Description	Schematic No.	Q'ty
	FRONT PANEL BLOCK			
9-1	BD290327	Front Panel Block Comp. AC-3500		1
9-2x	BD302054	Front Panel Block Comp. AC-3500-BL		1
9-3x	BD290338	Front Panel Block Comp. AC-3500L		1
9-4x	BD302055	Front Panel Block Comp. AC-3500L-BL		1
9-5	SP286558	Front Plate	AC-3535	1
9-6	SE630156	Counter Escutcheon	CJ-6007	1
9-7x	ZG286435	Taper Spring	AC-3536	7
9-8	SK286367	Push Button Knob (A)	AC-3537	7
9-9x	SK301304	Push Button Knob (C) (BL)	AC-3562	7
9-10	SE286547	Button Escutcheon (A)	AC-3538	3.5
9-11	BD305096	Lid Panel Part-G		1
9-12x	BD305097	Lid Panel Part-G (BL)		1
9-13x	BD305098	Lid Panel Part-G (L)		1
9-14x	BD305099	Lid Panel Part-G (L-BL)		1
9-15x	ZW273835	Nut M3		2
	FINAL ASSEMBLY BLOCK			
9-16	BC286694	Cabinet	AC-3545	1
9-17x	BC302006	Cabinet BL	AC-3545	1
9-18	ZW548010	Spot Facing Washer	MU-6028	4
9-19	ZS510344	Screw, binding head 4x12		4
9-20	SK646817	Single Knob	AA-5250	2
9-21x	SK281564	Single Knob (BL)	AA-5250	2
9-22	SK644670	Double Knob (Upper)	AA-5355	2
9-23	SK645208	Double Knob (Lower)	AA-5353	2
9-24x	SK287662	Double Knob (Upper) (BL)	AA-5355	2
9-25x	SK287673	Double Knob (Lower) (BL)	AA-5353	2
9-26	SK223705	Tuning Knob	T2-5019	1
9-27x	SK267445	Tuning Knob (BL)	T2-5019	1
9-28	SK264892	Selector Knob B	CI-6020	1
9-29x	SK691288	Selector Knob	CI-6020	1

10. LIST OF INTERCHANGEABLE SEMICONDUCTORS

As far as service is concerned, in case the original parts cannot be obtained, the interchangeable parts listed below can be substituted.

Original Parts			Interchangeable Parts	
Description	Parts No.	Utilizing P.C Board	Description	Parts No.
HA-1196	EI299452	AC-3502		
HA-1197	EI299700	AC-3502		
LA3122	EI697871	AC-3502		
NE545B	EI605013	AC-3501A		
STK-078	EI299608	AC-3504		
TA7303P	EI299441	AC-3502		
2SA733(Q)(P)	ET554657	AC-3503	2SA564(Q)(R) 2SA628(E)(F)	ET538154 ET557976
2SB544MP(E)(F)	ET299531	AC-3503		
2SC930(E)(F)	ET618873	AC-3502	2SC454(B)(C) 2SC710(D)	ET591366 ET704002
2SC945L(Q)(P)	ET639437	AC-3501A AC-3503	2SC536(F)(G)(H) 2SC711(E)(F)(G)(H)	ET634893 ET619727
2SC1449(K)(L)	ET640034	AC-3503	2SD234(O)(Y) 2SD313(E)(F)	ET393568 ET452531
2SC1571NP(G)(H)	ET223446	AC-3501A	2SC1222(E)(F) 2SC1312(G)(H)	ET459810 ET517263
2SD313(E)(F)	ET452531	AC-3503	2SD234(O)(Y) 2SC1449(K)(L)	ET393568 ET640034
2SD400MP(E)	ET299507	AC-3503		
1S188AM	ED562386	AC-3501A	1N34A 1N60	ED219464 ED428264
1S2473	ED624903	AC-3502	1S1588 1S2473VE	ED557447 ED560913
1S2473VE	ED560913	AC-3503	1S1588 1S2473	ED557447 ED624903
10D1	ED224526	AC-3503	1N4002	ED511907
GP20G	ED245417	AC-3503		
RD-16E(C)	ED290722	AC-3503		
RD-9-1E(B)	ED300269	AC-3503		
SR-105D	ED698826	AC-3501B		
GC-3PGI	ED283138	AC-3501B		

INDEX

Parts No.	Ref. No. & Symbol No.	Parts No.	Ref. No. & Symbol No.	Parts No.	Ref. No. & Symbol No.	Parts No.	Ref. No. & Symbol No.	Parts No.	Ref. No. & Symbol No.
BA290204	5-2	EC684720	7-21	ES740342	2-125	SK652397	8-15	ZS516205	7-40x
BA290261	6-2	ED224526	5-D5to10	ET223446	3-TR1to3	SK691288	9-29x	ZS521943	2-96
BA290272	6-3	ED224526	5-D15,16	ET223446	3-TR6, 7	SP286558	9-5	ZS522865	8-21
BA290316	4-2	ED224526	7-14x	ET299507	5-TR8	SP286727	7-59	ZS530673	7-16
BA290373	6-1	ED245417	5-D1to4	ET299531	5-TR7	SP286773	8-5	ZS552600	8-27
BA290452	4-1	ED283138	7-91	ET452531	5-TR3	SP286784	8-6x	ZS565942	7-61
BA290632	3-1	ED290722	5-D11	ET554657	5-TR4	SP287335	8-9x	ZS608106	2-12
BA290643	7-88	ED300269	5-D11	ET618873	4-TR1	SP287346	8-8x	ZS608185	2-98
BA290654	7-95	ED300269	5-D14	ET639437	3-TR4, 5	SP287357	8-7	ZS608185	8-22
BA290755	5-1	ED560913	5-D12	ET639437	5-TR2	TA207347	7-53	ZS721091	2-13
BA290935	7-93	ED562386	3-D1to3	ET639437	5-TR5, 6	TA286525	7-66	ZS721394	2-104
BA291115	7-92	ED624903	4-D1	ET649034	5-TR1	TA286536	7-67	ZS721620	2-52
BA298618	8-1	ED698826	7-90	EV299338	3-VR2	TA286626	7-6	ZS721732	2-62
BA304120	5-3	EE298337	8-24	EV299338	7-81	TA286672	7-62	ZS721765	2-64
BA722496	2-124	EE299621	8-23	EV299340	3-VR6, 7	TA300418	7-55	ZS722081	2-11
BC286694	9-16	EE301419	7-46x	EV299340	7-83	TA300423	7-51	ZS722092	2-37
BC302006	9-17x	EE655301	7-45	EV299351	3-VR5	TA301139	7-63x	ZS722103	2-97
BD290327	9-1	EF300580	7-77x	EV299351	7-82	TA301310	7-68x	ZS722114	2-99
BD290338	9-3x	EF563657	7-75	EV464231	5-VR1, 2	TA301311	7-69x	ZS722125	2-100
BD302054	9-2x	EF563681	7-74x	EV520806	3-VR3, 4	TA302001	7-64x	ZS722136	2-102
BD302055	9-4x	EF563703	7-73x	EV520806	4-VR2	TA302002	7-65x	ZS740396	2-101
BD305096	9-11	EF590692	7-72	EV522797	3-VR1	TA530910	8-25	ZW270088	7-8x
BD305097	9-12x	EF602550	7-101x	EV572433	4-VR1	TA625847	8-26	ZW270101	2-25
BD305098	9-13x	EF623103	7-76x	EW207742	8-34x	TC300422	7-50	ZW270112	2-119
BD305099	9-14x	EI299441	4-IC2	EW540123	8-33	TC721473	2-40	ZW273767	8-13x
BF701100	2-21	EI299452	4-IC3	EZ631945	8-32	TC721721	2-61	ZW273835	9-15x
BH720966	2-2x	EI299608	6-IC1	HE721056	2-8	ZG286435	9-7x	ZW273881	7-12x
BK700301	2-23	EI299608	7-100	HP721045	2-7	ZG300739	7-28	ZW273914	7-38
BK740391	2-24x	EI299700	4-IC4	HZ723060	2-3	ZG431897	7-33x	ZW273914	8-30
BL720347	2-22	EI605013	3-IC1	MB701111	2-49	ZG514697	7-32	ZW273960	7-39
BL721113	2-14	EI697871	4-IC1	MB701122	2-50	ZG717827	2-9	ZW290283	7-27
BL721282	2-33	EJ223457	4-J1	MB701370	2-67	ZG720988	2-4	ZW312693	7-48
BL721293	2-34	EJ223457	7-84	MB701381	2-68	ZG721102	2-78	ZW322110	7-49
BL721405	2-38	EJ225022	7-98	MB721607	2-51	ZG721361	2-82	ZW356657	2-118
BL721517	2-44	EJ240581	8-18	MB721798	2-66	ZG721372	2-83	ZW358018	2-10
BL721528	2-45	EJ254970	7-43x	MC701368	2-65	ZG721383	2-84	ZW410051	2-121
BM701335	2-93	EJ283094	4-J2	MH740401	2-117	ZG721563	2-48	ZW413188	7-11x
BR700986	2-19	EJ283094	7-85	MI300419	7-7	ZG721855	2-69	ZW420682	8-29
BT293398	4-T4	EJ296853	8-19x	ML286457	7-25	ZG721866	2-70	ZW548010	9-18
BT294120	7-36x	EJ298596	8-17	ML286470	7-30	ZG721877	2-71	ZW604416	8-28
BT294131	7-37x	EJ299283	3-J1, 2	ML286604	7-26	ZG721888	2-72	ZW623283	2-120
BT299575	4-T1	EJ299283	7-78	ML290902	7-29	ZG721890	2-73	ZW652408	8-16
BT697950	4-T3	EJ299610	8-10	ML290924	7-24	ZG721901	2-74	ZW659193	7-58x
BT698804	7-35	EJ539447	7-34	ML721541	2-47	ZG721912	2-75	ZW698308	7-5
BZ700290	2-31x	EJ551035	7-9	ML721642	2-54	ZG721934	2-77	ZW698308	8-11
BZ720955	2-1	EL283184	7-94	ML721653	2-55	ZG721945	2-79	ZW698940	7-42x
BZ721001	2-6	EL698793	7-56	ML721675	2-57	ZG721956	2-80	ZW700380	2-115x
BZ721124	2-15	EM301306	7-71x	ML721686	2-58	ZG721967	2-81	ZW721135	2-16
BZ721146	2-17	EM698815	7-70	ML721708	2-59	ZG721978	2-85	ZW721135	2-112x
BZ721157	2-18	EO263068	7-13	ML721743	2-63	ZG721980	2-86	ZW721181	2-113
BZ721260	2-32	EO290744	5-T1	ML723082	2-20	ZG722002	2-88	ZW722171	2-107
BZ721348	2-35	EO299373	3-L2	ML740392	2-56	ZG722013	2-89	ZW722182	2-108
BZ721350	2-36	EO299384	3-L1	MR530651	7-17	ZG722024	2-90	ZW722193	2-109
BZ721440	2-39	EO299564	4-T5	MR530662	7-15	ZG722035	2-91	ZW722204	2-110
BZ721495	2-42	EO299665	4-T2	MR740390	2-43	ZG723115	2-87	ZW722215	2-111
EA286334	7-89	EO539820	4-L3	MS286413	7-47	ZG740393	2-76	ZW740397	2-105
EC204671	5-C1to6	EO650428	4-L1, 2	MS720990	2-5	ZG740394	2-92	ZW740398	2-106
EC220421	5-C10	EO650823	6-L1	MS721710	2-60	ZS300421	7-52	ZW740399	2-114x
EC294118	7-22x	EP740395	2-94	MT721530	2-46	ZS300425	7-3x	ZW740400	2-116
EC298563	8-4x	ER246363	7-97x	MV357208	2-122	ZS302024	7-41x		
EC298800	4-C62	ER300744	5-R4	MV666887	2-123	ZS323728	2-103		
EC299518	4-C32	ER300744	7-44x	MZ721631	2-53	ZS325495	4-3		
EC299553	8-3x	ER650430	4-FL1, 2	SA301770	7-60	ZS325495	5-4		
EC300742	5-C7, 8	ER669734	3-FL1	SB721247	2-27	ZS325495	6-5		
EC301320	7-23x	ES224436	7-19	SB721258	2-28	ZS325495	7-1		
EC516767	6-C2	ES242346	7-20x	SB743467	2-29x	ZS355522	8-12x		
EC520773	5-C21	ES246227	8-2	SB743470	2-30x	ZS379350	3-2		
EC522167	4-C41	ES299294	3-SW4, 5	SE286547	9-10	ZS379350	7-4x		
EC523282	3-C21	ES299294	7-80	SE630156	9-6	ZS417216	7-18		
EC523282	3-C27	ES299327	3-SW1, 2	SK223705	9-26	ZS417216	7-99		
EC523282	4-C62	ES299327	7-79	SK264892	9-28	ZS417216	8-14x		
EC604440	3-C20	ES299362	3-SW3	SK267445	9-27x	ZS421806	7-54x		
EC621257	3-C12	ES299428	4-SW1	SK281564	9-21x	ZS434250	7-10x		
EC621257	3-C38	ES299428	7-86	SK286367	9-8	ZS447761	7-2x		
EC638177	3-C15	ES299430	4-SW1	SK287662	9-24x	ZS447761	8-31		
EC638177	4-C34	ES299430	7-87x	SK287673	9-25x	ZS447840	7-57x		
EC650406	4-C50	ES592964	7-31	SK301304	9-9x	ZS460440	2-26x		
EC675742	4-TC1, 2	ES698927	7-96	SK644670	9-22	ZS462802	6-4		
EC676721	3-C1	ES721484	2-41	SK645208	9-23	ZS463353	8-20x		
EC684720	5-C26, 27	ES722070	2-95	SK646817	9-20	ZS510344	9-19		

SECTION 3

SCHEMATIC DIAGRAM

1. AC-3500 BLOCK DIAGRAM NO.8-1 1542036A
2. AC-3500L BLOCK DIAGRAM NO.8-2 1542037A
3. AC-3500/L TONE CONTROL SCHEMATIC DIAGRAM NO.8-3 1542038A
4. AC-3500 MULTI FUNCTION SH SCHEMATIC DIAGRAM NO.8-4 1542039A
5. AC-3500L MULTI FUNCTION SCHEMATIC DIAGRAM NO.8-5 1542040A
6. AC-3500/L POWER, SYS. CON. & OSC. SCHEMATIC DIAGRAM NO.8-6 1542041A
7. AC-3500/L MAIN AMP SCHEMATIC DIAGRAM NO.8-7 1542042A
8. AC-3500/L FRONT END SCHEMATIC DIAGRAM NO.8-8 1542043A

AC-3500

LED P.C.B(AC-3501B)

HEAD PHONE P.C.B(AC-3501E)

MAIN AMP P.C.B (AC-3504) NO. 000914

MULTI FUNCTION P.C.B (AC-3502) NO. 000913

AM BAR ANTENNA

REC SWITCH SW902

HEAD PHONES

SPEAKER A

SPEAKER OUT PUT

SPEAKER B

AUTO STOP PLUNGER

PEAKING COIL P.C.B (AC-3582)

MOTOR SWITCH

REED SWITCH

PAUSE SWITCH

AC OUTLET

AC120V 60Hz

AC 3000T-2 CSA

MUTING P.C.B T4-8938

POWER, SYS.CON & OSC P.C.B (AC-3503) NO. 000916

TONE CONTROL & REC/PB P.C.B (AC-3501A) NO. 000915

REC/P.B HEAD LEFT

REC/P.B HEAD RIGHT

ERASE HEAD

BEAT SWITCH P.C.B (AC-3501F)

LOW

MID

HIGH

M901

M902

VU METER RIGHT

VU METER LEFT

SCALE LAMP

HOUSING LAMP

METER LAMP

LAMP A P.C.B (AC-3501D)

LAMP B P.C.B (AC-3501C)

AC-3503 2/2

AC 3000T-1

POWER

F1 2A 110V AREA
F2 1.2A 220V AREA
F3 1.2A 240V AREA

NOTE

UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS 1/4W(J)
ALL CAPACITORS IN μF 50WV(J)

POWER TRANSFORMER IS DIFFERENT(ACCORDING TO AREA)

WARNING: ⚠INDICATES SAFETY CRITICAL COMPONENTS. FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURER'S RECOMMENDED PARTS.

AVERTISSEMENT: ⚠ IL INDIQU LES COMPOSANTS CRITIQUES DE SÛRETÉ. POUR MAINTENIR LE DEGRE DE SECURITE DE L'APPAREIL NE REMPLACER LES COMPOSANTS DONT LE FONCTIONNEMENT EST CRITIQUE POUR LA SECURITE QUE PAR DES PIECES RECOMMANDEES PAR LE FABRICANT.

AC-3500 BLOCK DIAGRAM NO.8-1 1542036A

000912B

AC-3500L

WARNING : ⚠INDCATES SAFETY CRITICAL COMPONENTS. FOR CONTINUED SAFETY, REPLACE SAFETY CRITICAL COMPONENTS ONLY WITH MANUFACTURE'S RECOMMENDED PARTS.

AVERTISSEMENT : ⚠IL INDIQU LES COMPOSANTS CRITIQUES DE SÛRETÉ. POUR MAINTENIR LE DEGRE DE SECURITE DE L'APPAREIL NE REMPLACER LES COMPOSANTS DONT LE FONCTIONNEMENT EST CRITIQUE POUR LA SECURITE QUE PAR DES PIECES RECOMMANDEES PAR LE FABRICANT.

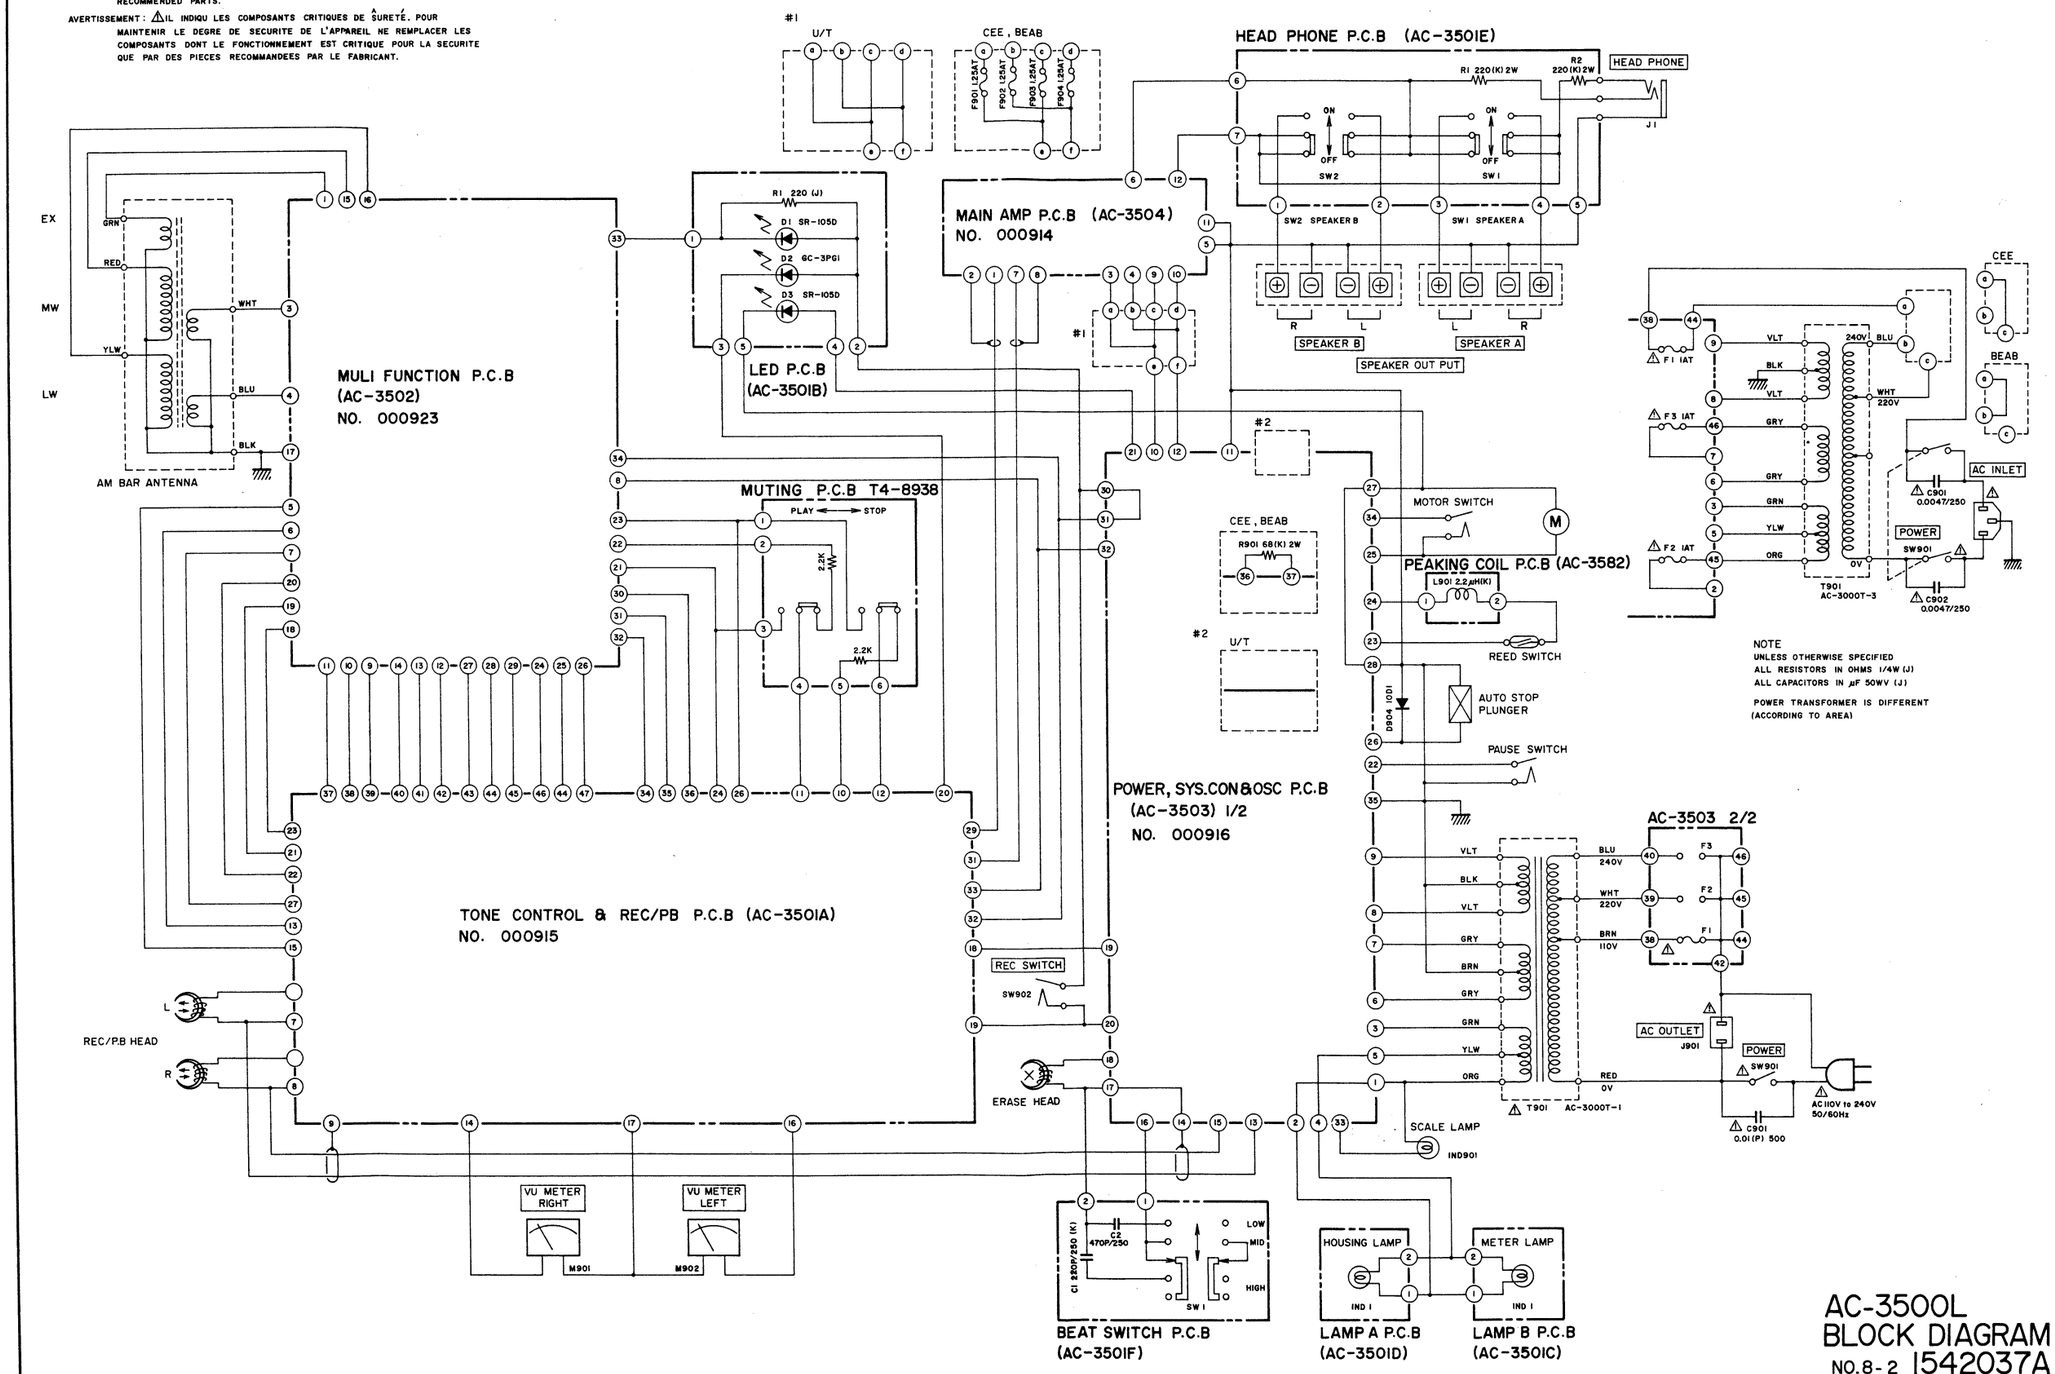

AC-3500L
BLOCK DIAGRAM
NO.8-2 1542037A

0009220

AC-3500/L

TR1, TR2, TR3
2SC1571NP (G)(H)

TR4, TR5
2SC945L (Q)(P)

IC1 NE545B

D1 1S188AM

D2 1S188AM

D3 1S188AM

FL1 FB1801M

VU METER SENS. ADJ

P.B. ⟷ REC.

REC LEVEL

REC LEVEL ADJ

DOLBY NR
ON
OFF
SW5

TAPE SELECTOR
Cr02
↓
LN
SW4

TR6, TR7
2SC1571NP (G)(H)

VOLUME

BASS

TREBLE

MONITOR

MODE
STEREO
↓
MONO

SW1
ON
↓
OFF

NOTE
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS 1/4 W (J)
ALL CAPACITORS IN μF 50WV (J)
(LL) INDICATES LOW LEAKAGE CAPACITORS

E C B
2SC1571NP
2SC945L

TONE CONTROL P.C BOARD AC-3501A

0009158

AC-3500/L
TONE CONTROL
SCHEMATIC DIAGRAM
NO.8-3 1542038A 2C

AC-3500

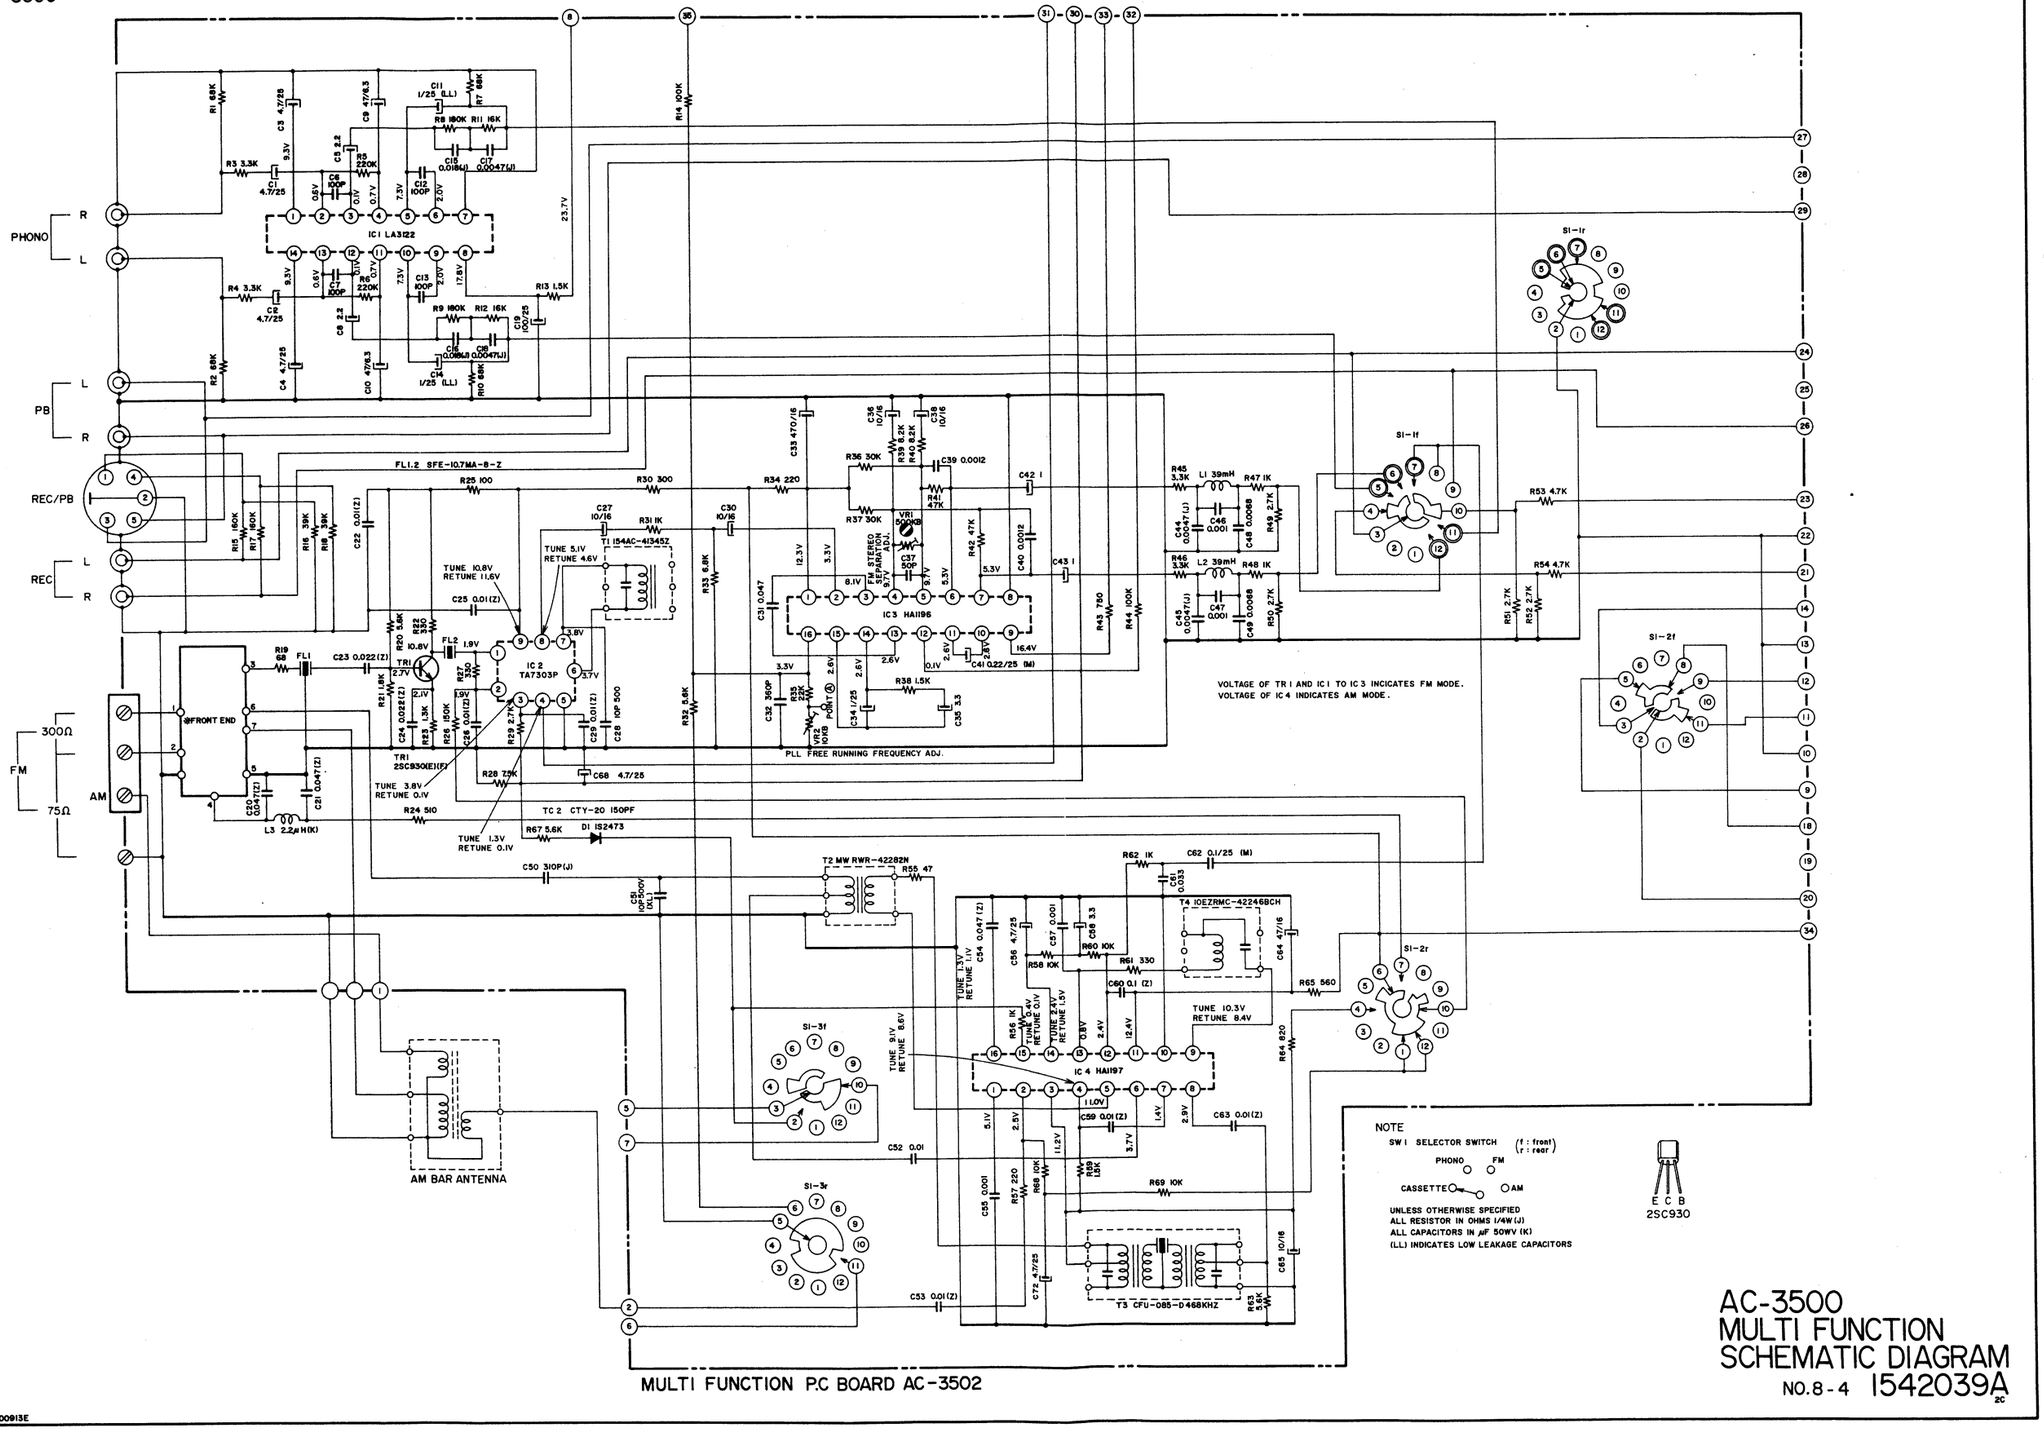

NOTE

SW 1 SELECTOR SWITCH (f : front) (r : rear)

PHONO FM

CASSETTE AM

UNLESS OTHERWISE SPECIFIED
ALL RESISTOR IN OHMS 1/4W(J)
ALL CAPACITORS IN μF 50WV (K)
(LL) INDICATES LOW LEAKAGE CAPACITORS

E C B
2SC930

MULTI FUNCTION P.C BOARD AC-3502

AC-3500 MULTI FUNCTION SCHEMATIC DIAGRAM

NO.8-4 1542039A 2C

000913E

AC-3500L

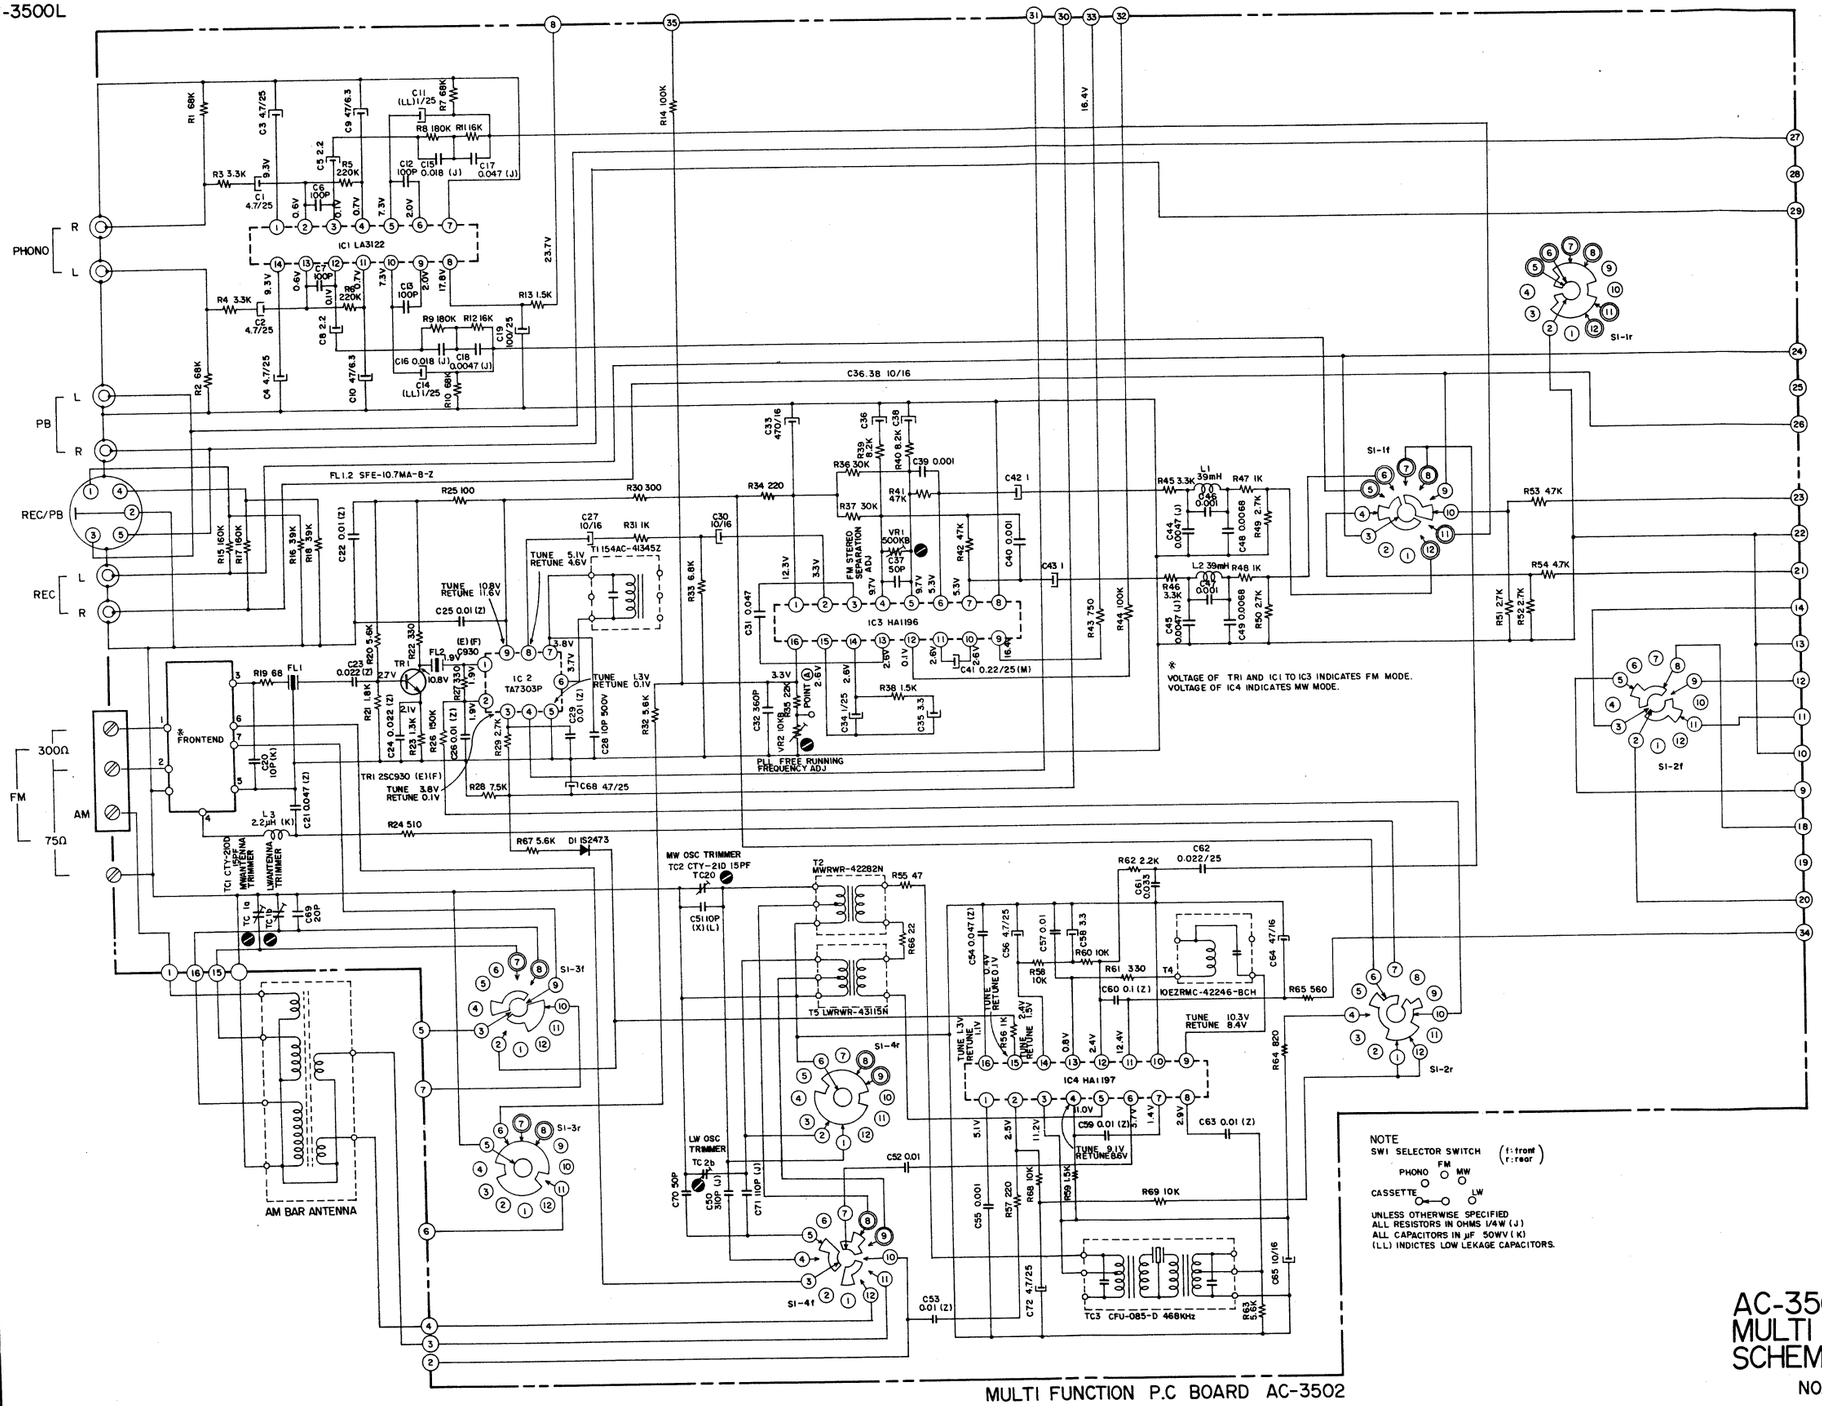
E C B
2SC930
PHONO
PB
REC/PB
REC
FM
AM
300Ω
75Ω
IC1 LA3122
IC2 TA7303P
IC3 HA1196
IC4 HA1197
FL1.2 SFE-10.7MA-8-Z
FL1
TR
TR1 2SC930 (E)(F)
T1 1544AC-41345Z
T2 MWRWR-42282N
T4 10EZRMC-42246-BCH
T5 LWRWR-43115N
TC3 CFU-085-D 468KHz
D1 1S2473
VR1 500KB
VR2 10KB
FM STEREO SEPARATION ADJ
PLL FREE RUNNING FREQUENCY ADJ
FRONTEND
FM ANTENNA TRIMMER
LW ANTENNA TRIMMER
AM BAR ANTENNA
MW OSC TRIMMER
LW OSC TRIMMER
S1-1f
S1-1r
S1-2f
S1-2r
S1-3f
S1-3r
S1-4f
S1-4r
TUNE 10.8V RETUNE 11.6V
TUNE 5.1V RETUNE 4.6V
TUNE 3.8V RETUNE 0.1V
TUNE 1.3V RETUNE 0.1V
TUNE 10.3V RETUNE 8.4V
TUNE 9.1V RETUNE 8.6V
PLL 16.4V
C36 .38 10/16
C42 1
C43 1
C41 0.22/25 (M)
R43 750
R44 100K
R14 100K
R30 300
R34 220
R25 100
R53 47K
R54 4.7K
R51 2.7K
R52 2.7K
R53 47K
R54 4.7K
R64 820
R65 560
R69 10K
C52 0.01
C53 0.01 (Z)
C63 0.01 (Z)
C72 47/25
C68 47/25
C85 10/16
R28 7.5K
R24 510
R67 5.6K
C62 0.022/25
R62 2.2K
C61 0.033
C64 47/16
R60 10K
R61 330
C60 0.1 (Z)
R58 10K
C56 47/25
C57 0.01
C59 33
C54 0.047 (Z)
C55 0.001
R57 220
R68 10K
R59 1.5K
C70 50P
C71 110P (J)
C50 310P (J)
C51 10P (X)(L)
C32 360P
C34 1/25
C35 3.3
R38 1.5K
R55 22K
R56 1K
C39 0.001
C40 0.001
C44 0.0047 (J)
C45 0.0047 (J)
C48 0.0068
C49 0.0068
R46 3.3K
R47 1K
R48 1K
R49 2.7K
R50 2.7K
C36 C38
R39 8.2K
R40 8.2K
R41 47K
R42 47K
R36 30K
R37 30K
C33 470/16
C30 10/16
R33 6.8K
R32 5.6K
C31 0.047
C37 50P
C27 10/16
R31 1K
C22 0.01 (Z)
C25 0.01 (Z)
C23 0.022 (Z)
C24 0.022 (Z)
C26 0.01 (Z)
C28 10P 500V
C29 0.01 (Z)
C21 0.047 (Z)
C58 10P (CH)
R19 68
R20 5.6K
R21 1.8K
R22 330
R23 1.3K
R26 150K
R27 330
R29 2.7K
L3 2.2μH (K)
L1 39mH
L2 39mH
C11 (LL) 1/25
C14 (LL) 1/25
C12 100P
C15 0.018 (J)
C17 0.047 (J)
C16 0.018 (J)
C18 0.0047 (J)
C13 100P
C19 100/25
C1 4.7/25
C2 4.7/25
C3 4.7/25
C4 4.7/25
C5 2.2
C6 100P
C7 100P
C8 2.2
C9 47/6.3
C10 47/6.3
R1 68K
R2 68K
R3 3.3K
R4 3.3K
R5 220K
R6 220K
R7 68K
R8 180K
R9 180K
R10 68K
R11 16K
R12 16K
R13 1.5K
R15 150K
R16 39K
R17 150K
R18 39K
C22 0.01 (Z)
C10 47/6.3
C9 47/6.3
C11 (LL) 1/25
C14 (LL) 1/25
C12 100P
C15 0.018 (J)
C17 0.047 (J)
C16 0.018 (J)
C18 0.0047 (J)
C13 100P
C19 100/25
C1 4.7/25
C2 4.7/25
C3 4.7/25
C4 4.7/25
C5 2.2
C6 100P
C7 100P
C8 2.2
R1 68K
R2 68K
R3 3.3K
R4 3.3K
R5 220K
R6 220K
R7 68K
R8 180K
R9 180K
R10 68K
R11 16K
R12 16K
R13 1.5K
R15 150K
R16 39K
R17 150K
R18 39K
C22 0.01 (Z)
C25 0.01 (Z)
C23 0.022 (Z)
C24 0.022 (Z)
C26 0.01 (Z)
C28 10P 500V
C29 0.01 (Z)
C21 0.047 (Z)
C58 10P (CH)
R19 68
R20 5.6K
R21 1.8K
R22 330
R23 1.3K
R26 150K
R27 330
R29 2.7K
L3 2.2μH (K)
C27 10/16
R31 1K
C30 10/16
R33 6.8K
R32 5.6K
C31 0.047
C37 50P
R36 30K
R37 30K
R39 8.2K
R40 8.2K
R41 47K
R42 47K
C33 470/16
C36 C38
R34 220
R30 300
R25 100
C42 1
C43 1
C41 0.22/25 (M)
R43 750
R44 100K
R14 100K
C44 0.0047 (J)
C45 0.0047 (J)
C48 0.0068
C49 0.0068
R46 3.3K
R47 1K
R48 1K
R49 2.7K
R50 2.7K
L1 39mH
L2 39mH
C39 0.001
C40 0.001
R53 47K
R54 4.7K
R51 2.7K
R52 2.7K
R53 47K
R54 4.7K
C32 360P
C34 1/25
C35 3.3
R38 1.5K
R55 22K
R56 1K
VR1 500KB
VR2 10KB
C50 310P (J)
C51 10P (X)(L)
C70 50P
C71 110P (J)
C54 0.047 (Z)
C55 0.001
C56 47/25
C57 0.01
C59 33
R57 220
R58 10K
R60 10K
R68 10K
R59 1.5K
R61 330
C60 0.1 (Z)
C61 0.033
C62 0.022/25
R62 2.2K
C64 47/16
R69 10K
C52 0.01
C53 0.01 (Z)
C63 0.01 (Z)
C72 47/25
C68 47/25
C85 10/16
R28 7.5K
R24 510
R67 5.6K
R64 820
R65 560
R63 22K
R66 22
R55 47
C51 10P (X)(L)
C29 0.01 (Z)
C58 10P (CH)
TC1 CTY-2001 (K)
TC 1a
TC 1b
TC2 CTY-210 15PF
TC20
TC 2b
C59 2.2P
R67 5.6K
D1 1S2473
R66 22
R63 22K
C65 10/16
C53 0.01 (Z)
C52 0.01
C63 0.01 (Z)
C29 0.01 (Z)
R69 10K
R64 820
R65 560
R62 2.2K
C62 0.022/25
C61 0.033
C64 47/16
R60 10K
R61 330
C60 0.1 (Z)
R58 10K
C56 47/25
C57 0.01
C59 33
C54 0.047 (Z)
C55 0.001
R57 220
R68 10K
R59 1.5K
C70 50P
C71 110P (J)
C50 310P (J)
C32 360P
C34 1/25
C35 3.3
R38 1.5K
R55 22K
R56 1K
C39 0.001
C40 0.001
C44 0.0047 (J)
C45 0.0047 (J)
C48 0.0068
C49 0.0068
R46 3.3K
R47 1K
R48 1K
R49 2.7K
R50 2.7K
C36 C38
R39 8.2K
R40 8.2K
R41 47K
R42 47K
C33 470/16
C30 10/16
R33 6.8K
R32 5.6K
C31 0.047
C37 50P
R36 30K
R37 30K
C27 10/16
R31 1K
C22 0.01 (Z)
C25 0.01 (Z)
C23 0.022 (Z)
C24 0.022 (Z)
C26 0.01 (Z)
C28 10P 500V
C29 0.01 (Z)
C21 0.047 (Z)
C58 10P (CH)
R19 68
R20 5.6K
R21 1.8K
R22 330
R23 1.3K
R26 150K
R27 330
R29 2.7K
L3 2.2μH (K)
C68 47/25
R28 7.5K
R24 510
R67 5.6K
D1 1S2473
C62 0.022/25
R62 2.2K
C61 0.033
C64 47/16
R60 10K
R61 330
C60 0.1 (Z)
R58 10K
C56 47/25
C57 0.01
C59 33
C54 0.047 (Z)
C55 0.001
R57 220
R68 10K
R59 1.5K
C70 50P
C71 110P (J)
C50 310P (J)
C32 360P
C34 1/25
C35 3.3
R38 1.5K
R55 22K
R56 1K
C39 0.001
C40 0.001
C44 0.0047 (J)
C45 0.0047 (J)
C48 0.0068
C49 0.0068
R46 3.3K
R47 1K
R48 1K
R49 2.7K
R50 2.7K
L1 39mH
L2 39mH

AC-3500/L

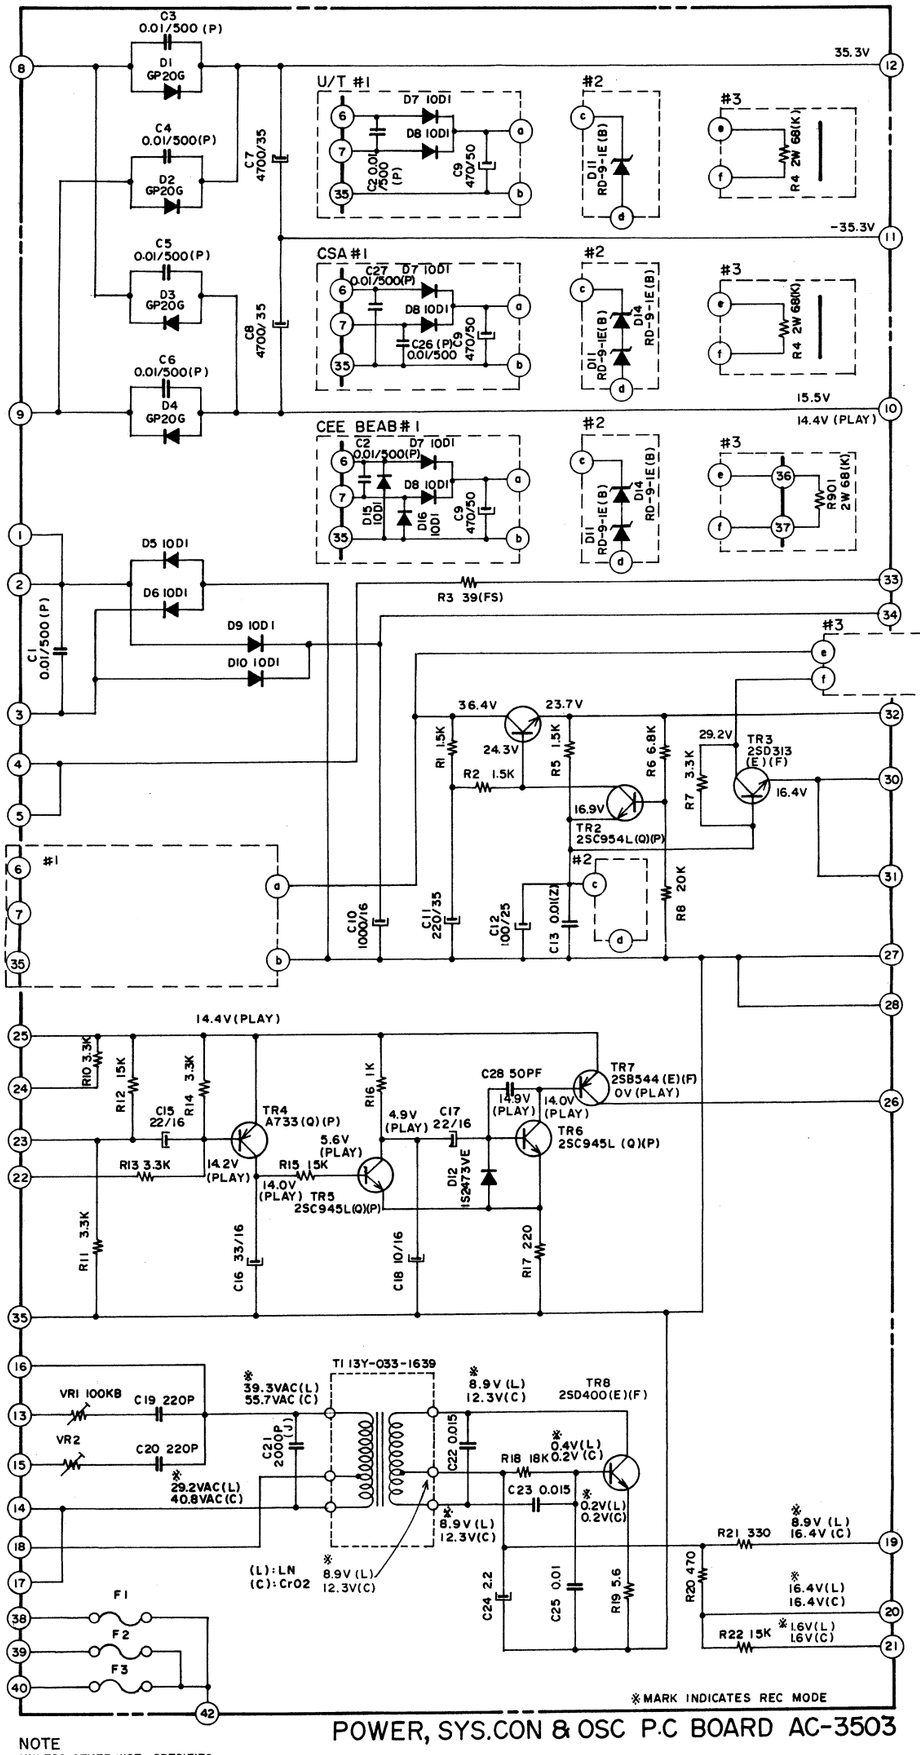

POWER, SYS.CON & OSC P.C BOARD AC-3503

NOTE
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS 1/4W(J)
ALL CAPACITORS IN μF 50WV(K)
(F.S) INDICATES FAIL SAFE RESISTORS.

	U/T			CSA	CEE BEAB
	110V	220V	240V		
F1	2A	–	–	2A	1 AT
F2	–	1A	–	1A	1 AT
F3	–	–	1A	1A	1AT

AC-3500/L
POWER, SYS.CON. & OSC. SCHEMATIC DIAGRAM
NO.8-6 1542041A 2C

000916D

AC-3500/L

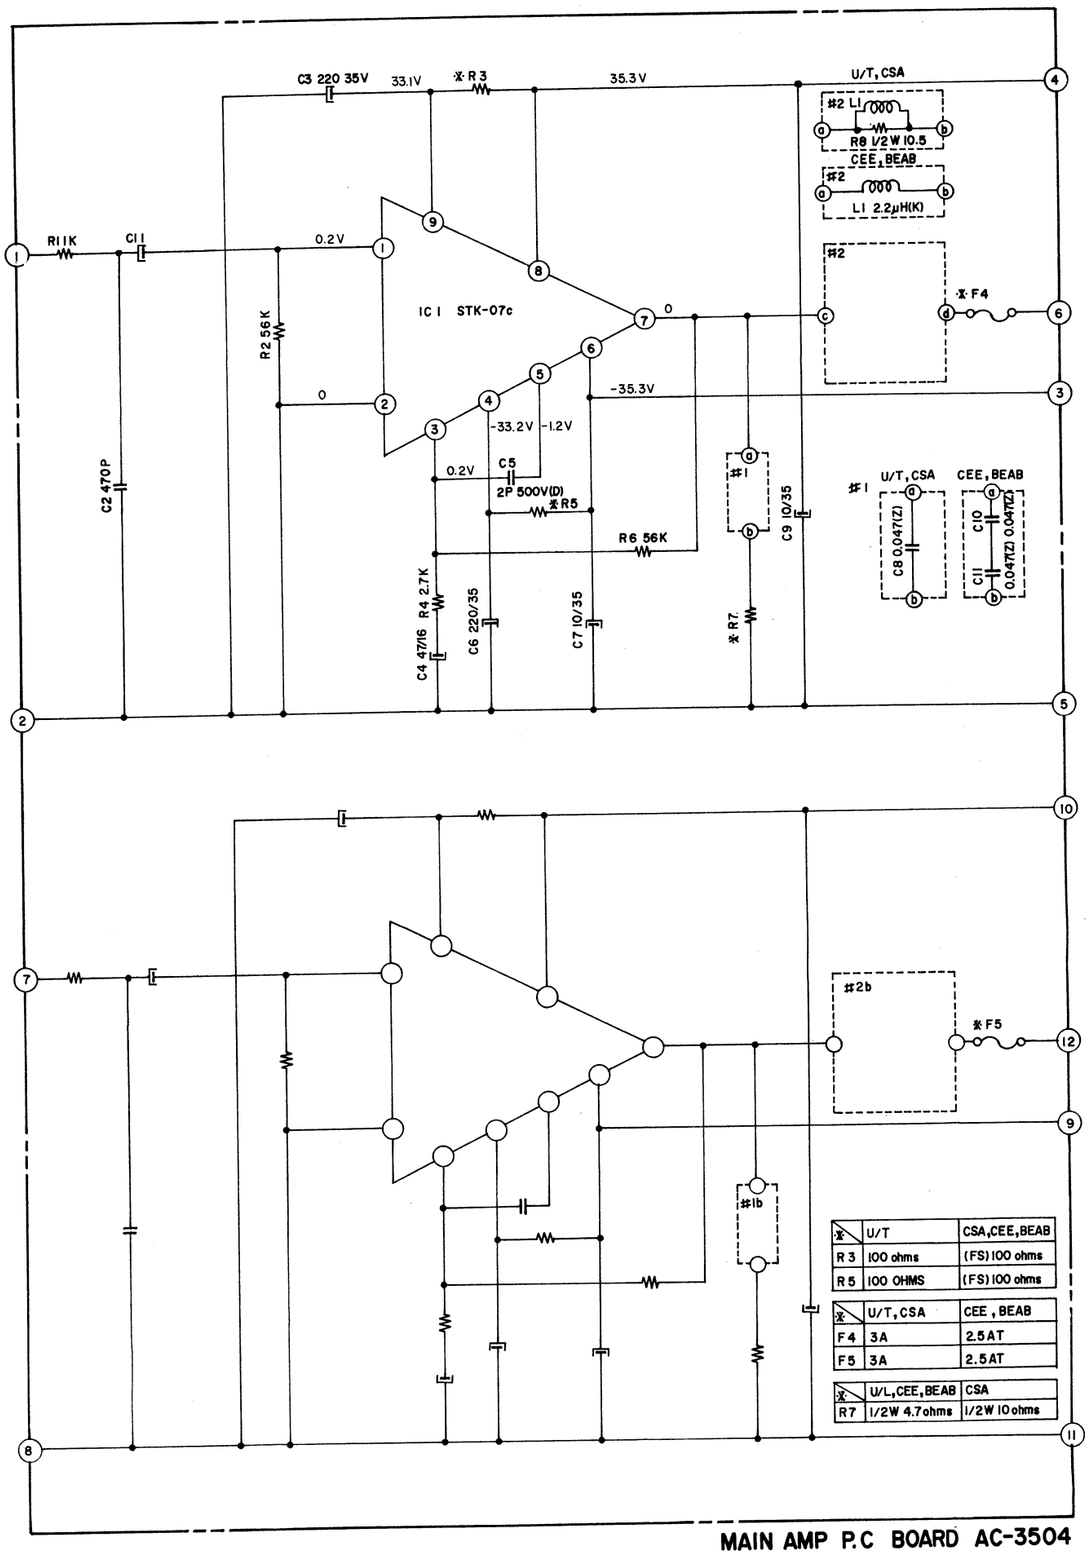

*	U/T	CSA, CEE, BEAB
R3	100 ohms	(FS) 100 ohms
R5	100 OHMS	(FS) 100 ohms

*	U/T, CSA	CEE, BEAB
F4	3A	2.5AT
F5	3A	2.5AT

*	U/L, CEE, BEAB	CSA
R7	1/2W 4.7ohms	1/2W 10ohms

MAIN AMP P.C BOARD AC-3504

NOTE
UNLESS OTHERWISE SPECIFIED
ALL RESISTORS IN OHMS 1/4W (J)
ALL CAPACITORS IN μF 50WV

AC-3500/L
MAIN AMP
SCHEMATIC DIAGRAM
NO. 8-7 1542042A 2C

000914A

AC-3500/L

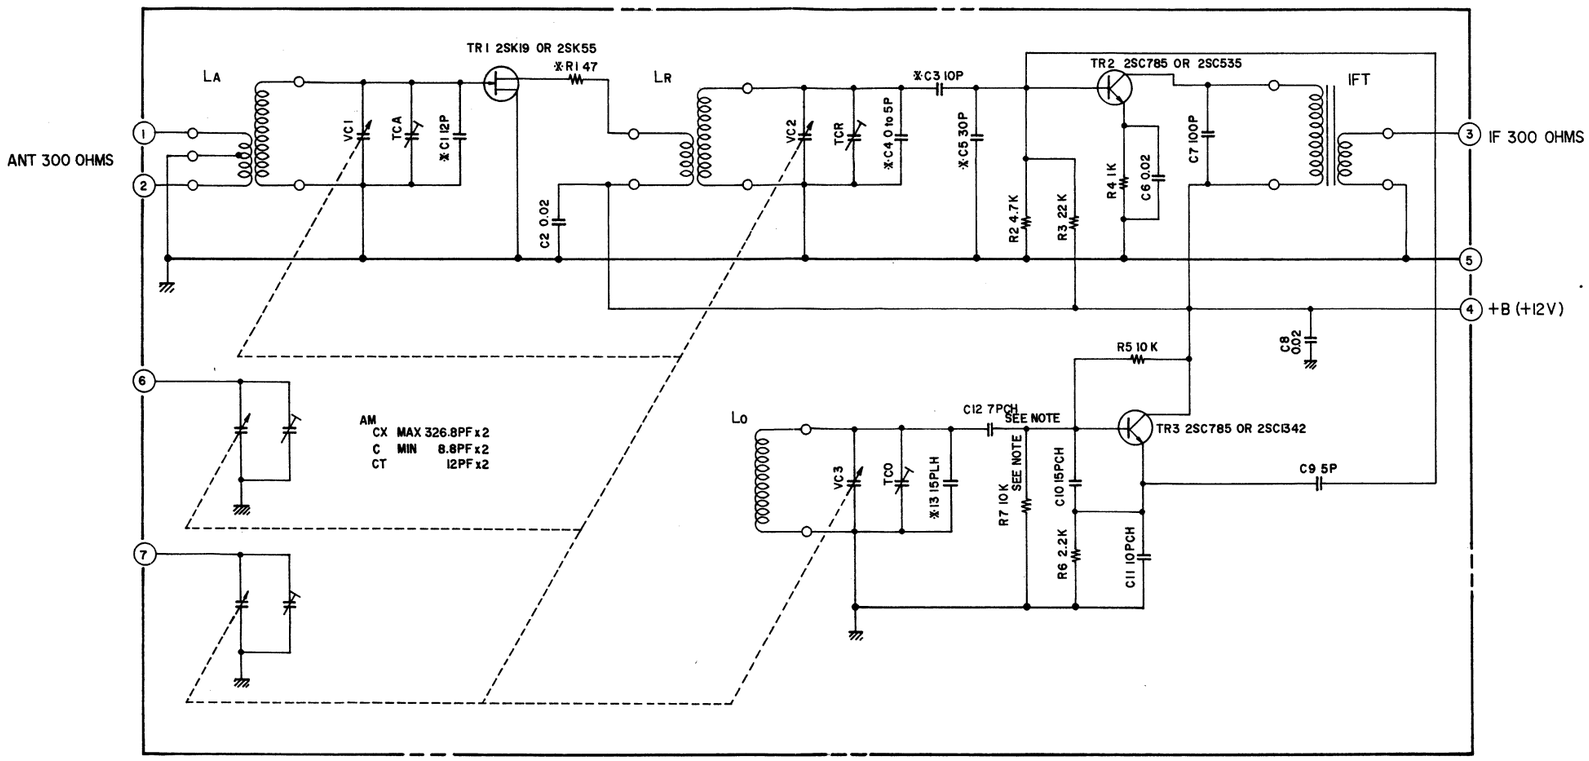

NOTE

1. UNLESS OTHERWISE SPECIFIED
   ALL RESISTER IN OHMS
   ALL CAPACITORS IN μF
2. ※ MARK: ADJUSTED BY FACTORY
3. R7: 6.8K OHMS (CEE, BEAD MODEL)
   C12: 5pF (CEE, BEAD MODEL)
4. MODEL AC-3500 (U/T, CSA): FB512FU14
   MODEL AC-3500L (U/T) : FB512FU14
   MODEL AC-3500L(CEE, BEAD): FB512FU12
5. TCA AND TCO ARE USING ONLY AC-3500
   THAT INDICATES ※ MARK

AC-3500/L FRONT END SCHEMATIC DIAGRAM

NO. 8-8 1542043A

000919